

YU-DD24 AMERICAS

BEST VALUE IN THE WORLD OF CUTTING TOOLS



SOLID CARBIDE DREAM DRILLS

PRO with/without Coolant Holes

NEW X with/without Coolant Holes

GENERAL with/without Coolant Holes

HIGH FEED with Coolant Holes

FLAT BOTTOM without Coolant Holes

INOX with Coolant Holes

ALU with Coolant Holes

MQL TYPE with Coolant Holes(10xD - 40xD)

for HIGH HARDENED STEELS
without Coolant Holes (HRc50-HRc70)



SELECTION GUIDE

INCH

SERIES	PRO		X				
	DGN506	DGN508	DTX416 DTX711	DTX418 DTX712	DTX406	DTX408	DTX421
DRILLING DEPTH	3xD	5xD	3xD	5xD	3xD	5xD	8xD
TOOL MATERIAL	CARBIDE		CARBIDE				
LENGTH	SHORT	LONG	SHORT	LONG	SHORT	LONG	EXTRA LONG
SIZE MIN	D3.0	D1.0	D1/8	D13/64	D3.0	D1.0	D3.0
SIZE MAX	D20.0	D20.0	D5/8	D1/2	D20.0	D20.0	D20.0
PAGE	10	14	24	26	27	31	35
SURFACE TREATMENT	Z-Coating		RCH-Coating				


SOLID CARBIDE DREAM DRILLS

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc								
P	1	Non-alloy steel	About 0.15% C Annealed	125									
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎	◎	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎	◎	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○	○	○	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎	◎	◎	◎	◎
	7		Quenched & Tempered	275	29	◎	◎	◎	◎	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	○	○	○	○	○	○	○	○
	9		Quenched & Tempered	350	38	○	○	○	○	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎	◎	◎	◎
11	Quenched & Tempered	325		35	○	○	○	○	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○	○	○	○	
	14		Austenitic	180	10								
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	○	○	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎	◎	◎	◎	◎	
	18		Pearlitic	250	25	○	○	○	○	○	○	○	
	19		Ferritic	130		◎	◎	◎	◎	◎	◎	◎	
20	Malleable cast iron	Pearlitic	230	21	○	○	○	○	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60									
	22		Curable Hardened	100									
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75									
	24		≤ 12% Si, Curable Hardened	90									
	25		> 12% Si, Not Curable	130									
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110									
	27		CuZn, CuSnZn (Brass)	90									
	28		CuSn, lead-free copper and electrolytic copper	100									
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.									
	30												
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15								
	32		Fe Based Cured	280	30								
	33		Ni or Co Based Annealed	250	25								
	34		Ni or Co Based Cured	350	38								
	35	Titanium Alloys	Pure Titanium	400Rm									
36		Alpha + Beta Alloys	Hardened	1050Rm									
37													
H	38	Hardened steel	Hardened	550	55	○	○	○	○	○	○	○	
	39		Hardened	630	60								
	40	Chilled Cast Iron	Cast	400	42								
	41	Hardened Cast Iron	Hardened	550	55								

X					GENERAL							
DTX414	DTX722	DTX404	DTX423	DTX424	DH416 DH711	DH418 DH712	DH406	DH408	DH421	DH414	DH722	DH404
3xD	5xD	3xD	3xD	5xD	3xD	5xD	3xD	5xD	8xD	3xD	5xD	3xD
CARBIDE					CARBIDE							
STUB	LONG	STUB	SHORT	LONG	SHORT	LONG	SHORT	LONG	EXTRA LONG	STUB	LONG	STUB
D1/8	D13/64	D3.0	D3.0	D1.0	D1/8	D13/64	D3.0	D1.0	D3.0	D1/8	D13/64	D3.0
D5/8	D1/2	D20.0	D20.0	D20.0	D5/8	D1/2	D20.0	D20.0	D20.0	D5/8	D1/2	D20.0
39	40	41	43	47	60	62	63	67	71	75	76	77
RCH-Coating					TiAIN							

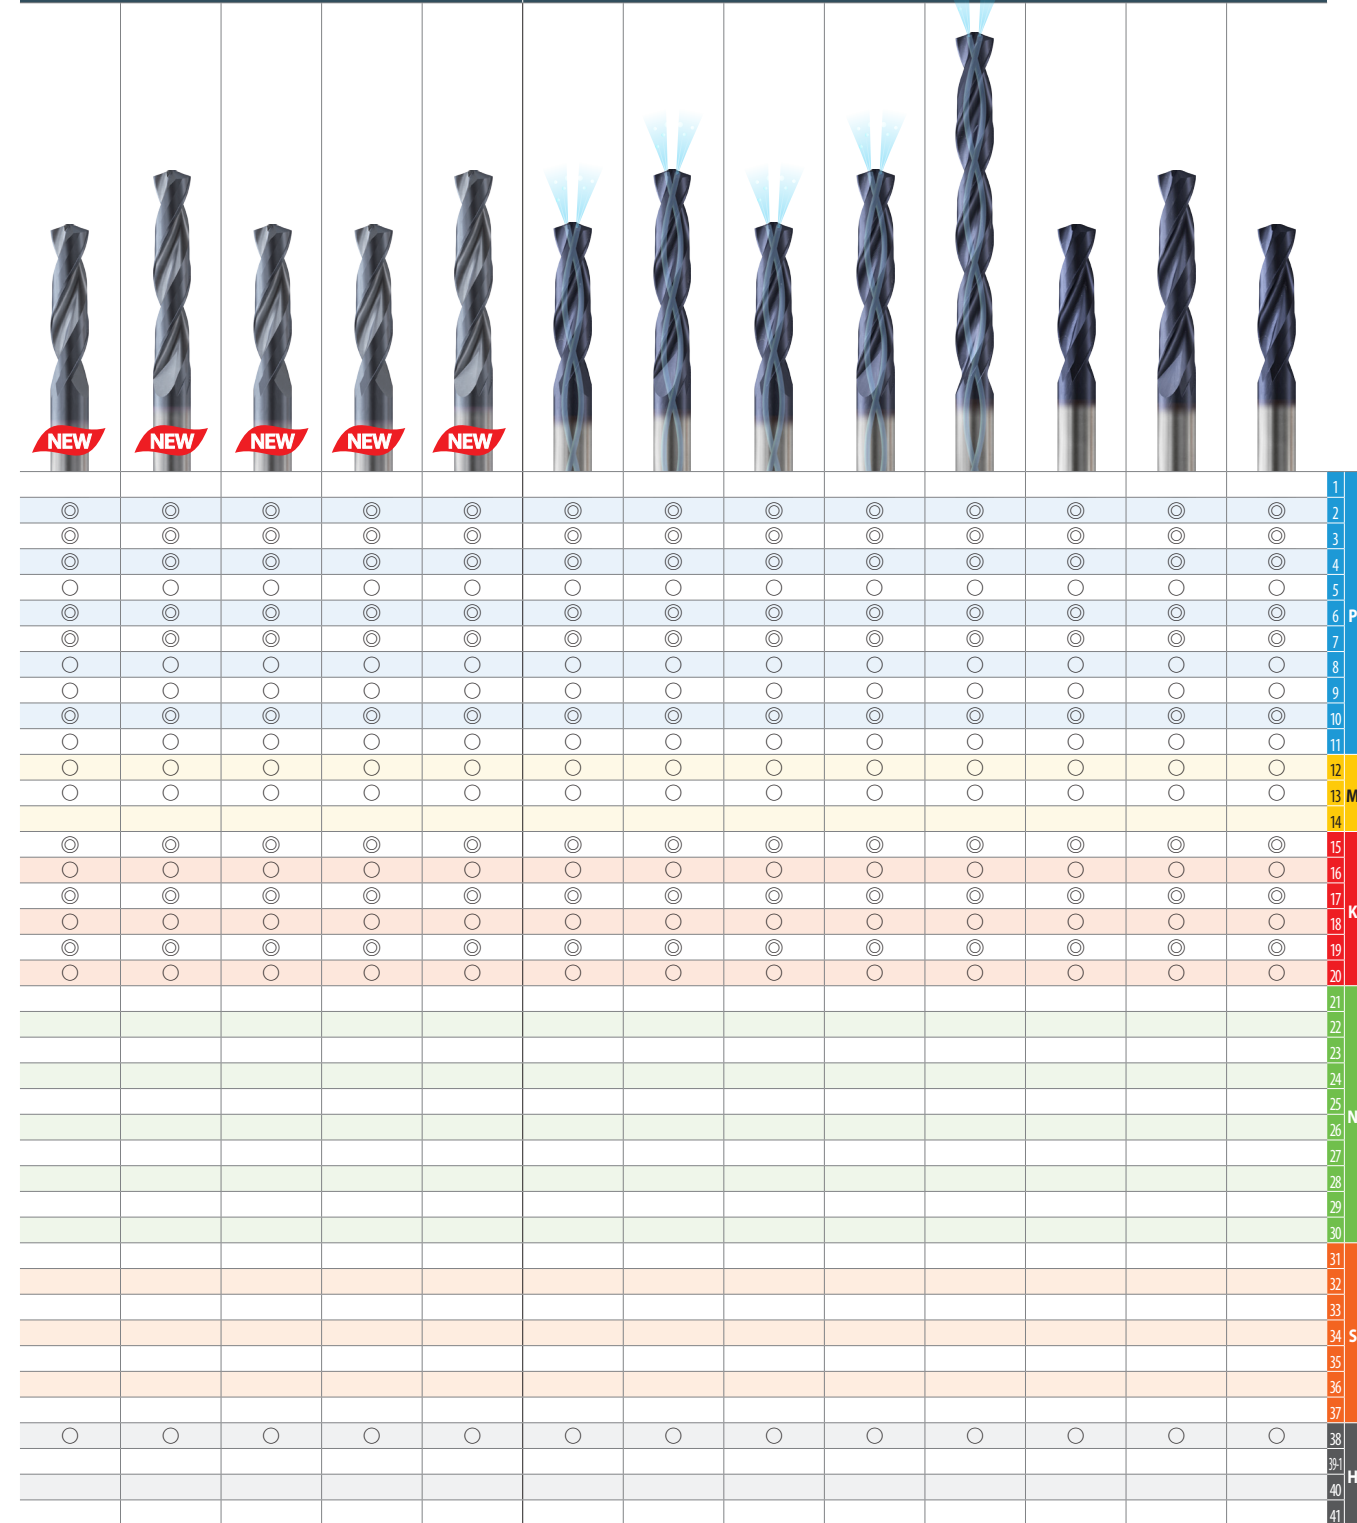

HIGH HARDENED STEELS	
SERIES	DH501 DH500
DRILLING DEPTH	3XD 3XD
TOOL MATERIAL	CARBIDE
LENGTH	SHORT SHORT
SIZE MIN	D1/8 D1.0
SIZE MAX	D3/4 D14.0
PAGE	171 173
SURFACE TREATMENT	TiAIN

SOLID CARBIDE DREAM DRILLS



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13			
	3		About 0.45% C Quenched & Tempered	250	25			
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10			
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11		Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Malleable cast iron	Ferritic	130			
	20		Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60				
	22		Curable Hardened	100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400Rm				
37	Alpha + Beta Alloys Hardened		1050Rm					
H	38	Hardened steel	Hardened	550	55	◎	◎	
	39		Hardened	630	60	◎	◎	
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

GUIDE LINE TO ICONS

Standard of Tools

DIN 6537 | DIN 6539

Number of DIN Standard

Coolant Supply Pressure

45 bar | 20 bar

Tool Material

CARBIDE

Point Angle

140° | 118°

Surface Treatment

TiAIN

Titanium Aluminum Nitride Coating

RCH-Coating

YG-1 RCH-Coating

X-Coating

YG-1 X-Coating

H-Coating

YG-1 H-Coating

Z-Coating

YG-1 Z-Coating

DLC

Diamond-Like Carbon Coating

Tolerance of Dimension

m7

Tolerance of Outside Diameter

h6

Tolerance of Shank Diameter

Cutting Condition

Icon representing cutting condition



SOLID CARBIDE


DREAM DRILLS - PRO

- For General Purpose (up to HRc50)
- Extremely High Hardness and Heat Resistance due to YG-1 Special Z-Coating Technology

DREAM DRILLS **PRO**




Performance Upgrade with Faster Cutting Speed



Wave Shape Cutting Edge

- Improve chip formation
- Low Cutting Force




140 Degree Point Angle

- Provides edge strength and Exceptional tool life
- Good Self Centering
- Low Torque

Micro-grained Carbide

- Achieving Excellent Wear Resistance
- Maximum Tool Life and High Performance




Optimized wide flute design

- The unique flute structure provides good surface finish, longer tool life and requires less cutting force



Radius Shape




Helical Thinning

- Low Thrust
- Stable Torque
- Good Chip Breakage


Higher & Improved cutting conditions due to YG-1 Special Z-Coating Technology (YG-1's Unique Silicon Based Coating: Nano-Layer Coating)

- Extremely High Hardness and Heat Resistance

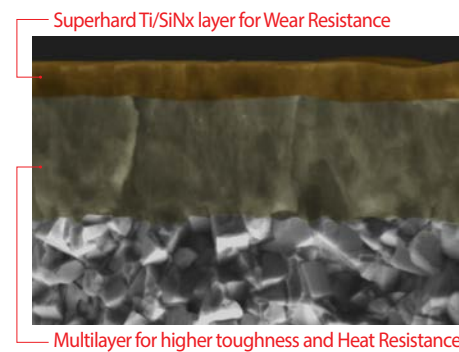


Superhard Ti/SiNx layer for Wear Resistance

Multilayer for higher toughness and Heat Resistance

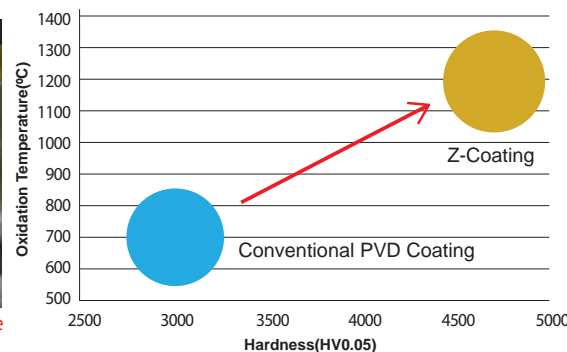

CASE STUDY

► SOLID CARBIDE DREAM DRILLS - PRO with Coolant Holes

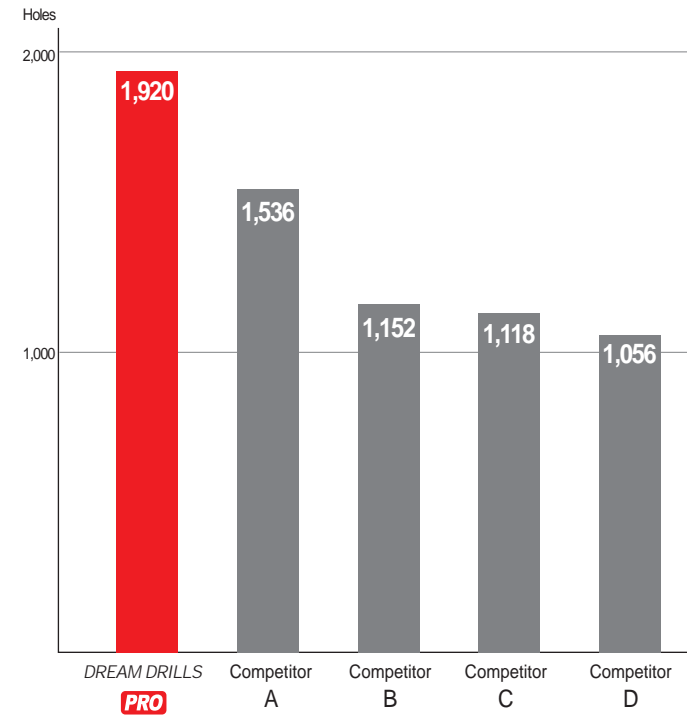

Cutting Condition

Work Material	- ANSI : 4140 - DIN : 42CrMo4 - JIS : SCM440 - Hardness : HRc30 (HB286)
O.D Size	Ø10.0 (.3937 inch)
RPM	4,458 rev./min.
Cutting Speed	140 ft/min.
Feed	.012 inch/rev.
Drilling Depth	1.77" (4.5xD)
Coolant	Internal Cooling (20 bar) Water Soluble (9% Emulsion)
Machine	Machining Center


DREAM DRILLS **PRO**

Total Drilling 1,920 Holes




Competitor A

Total Drilling 1,536 Holes




Competitor B

Total Drilling 1,152 Holes




Competitor C

Total Drilling 1,118 Holes



Competitor D

Total Drilling 1,056 Holes






Z-COATED SOLID CARBIDE DREAM DRILLS - PRO with COOLANT HOLES

SERIES

DGN506

- ▶ Drilling for Carbon Steels, Alloy Steels (HB225 ~ HB325), Pre-hardened Steels (HRc30 ~ HRc50), Cast Iron
- ▶ Wave shape cutting edge to improve chip formation for low cutting force
- ▶ Helical thinning for low thrust, stable torque and good chip breakage
- ▶ Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

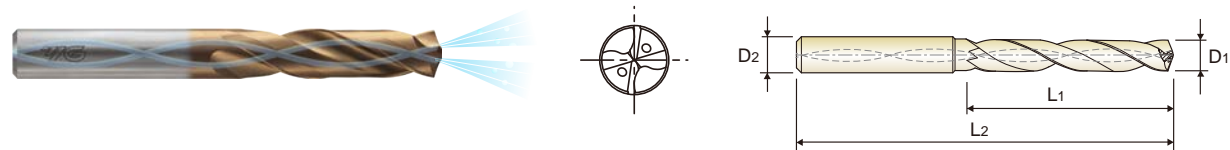

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar Z Coating p.18

SHORT 3 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
Z-Coating	D1						Z-Coating	D1					
DGN506030	3.0		.1181	6	20	62	DGN506011E		11/64	.1719	6	24	66
DGN506031	3.1		.1220	6	20	62	DGN506044	4.4		.1732	6	24	66
DGN506008E		1/8	.1250	6	20	62	DGN5060446	4.46		.1754	6	24	66
DGN506032	3.2		.1260	6	20	62	DGN506045	4.5		.1772	6	24	66
DGN506033	3.3		.1299	6	20	62	DGN506046	4.6		.1811	6	24	66
DGN5060336	3.36		.1323	6	20	62	DGN5060466	4.66		.1835	6	24	66
DGN506034	3.4		.1339	6	20	62	DGN506047	4.7		.1850	6	24	66
DGN5060344	3.44		.1356	6	20	62	DGN506012E		3/16	.1875	6	28	66
DGN506035	3.5		.1378	6	20	62	DGN506048	4.8		.1890	6	28	66
DGN5060352	3.52		.1387	6	20	62	DGN506049	4.9		.1929	6	28	66
DGN5060357	3.57		.1405	6	20	62	DGN506050	5.0		.1969	6	28	66
DGN506036	3.6		.1417	6	20	62	DGN506051	5.1		.2008	6	28	66
DGN506037	3.7		.1457	6	20	62	DGN5060515	5.15		.2029	6	28	66
DGN5060377	3.77		.1484	6	24	66	DGN506013E		13/64	.2031	6	28	66
DGN506038	3.8		.1496	6	24	66	DGN506052	5.2		.2047	6	28	66
DGN5060386	3.86		.1521	6	24	66	DGN5060526	5.26		.2070	6	28	66
DGN506039	3.9		.1535	6	24	66	DGN506053	5.3		.2087	6	28	66
DGN506010E		5/32	.1563	6	24	66	DGN506054	5.4		.2126	6	28	66
DGN506040	4.0		.1575	6	24	66	DGN506003G		#3	.2130	6	28	66
DGN5060405	4.05		.1596	6	24	66	DGN5060547	5.47		.2152	6	28	66
DGN506020G		#20	.1610	6	24	66	DGN506055	5.5		.2165	6	28	66
DGN506041	4.1		.1614	6	24	66	DGN506014E		7/32	.2188	6	28	66
DGN5060416	4.16		.1636	6	24	66	DGN506056	5.6		.2205	6	28	66
DGN506042	4.2		.1654	6	24	66	DGN506057	5.7		.2244	6	28	66
DGN5060427	4.27		.1681	6	24	66	DGN506058	5.8		.2283	6	28	66
DGN506043	4.3		.1693	6	24	66	DGN506059	5.9		.2323	6	28	66

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																													
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

Z-COATED SOLID CARBIDE DREAM DRILLS - PRO with COOLANT HOLES

SERIES

DGN506

- ▶ Drilling for Carbon Steels, Alloy Steels (HB225 ~ HB325), Pre-hardened Steels (HRc30 ~ HRc50), Cast Iron
- ▶ Wave shape cutting edge to improve chip formation for low cutting force
- ▶ Helical thinning for low thrust, stable torque and good chip breakage
- ▶ Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

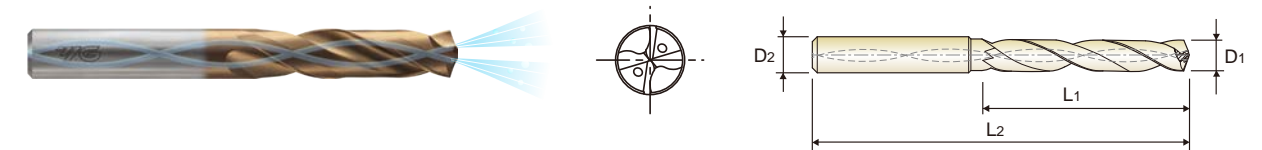

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar Z Coating p.18

SHORT 3 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
Z-Coating	D1						Z-Coating	D1					
DGN506015E		15/64	.2344	6	28	66	DGN506076	7.6		.2992	8	41	79
DGN506060	6.0		.2362	6	28	66	DGN506077	7.7		.3031	8	41	79
DGN506061	6.1		.2402	8	34	79	DGN506078	7.8		.3071	8	41	79
DGN506003L		C	.2420	8	34	79	DGN506079	7.9		.3110	8	41	79
DGN506062	6.2		.2441	8	34	79	DGN506020E		5/16	.3125	8	41	79
DGN506063	6.3		.2480	8	34	79	DGN506080	8.0		.3150	8	41	79
DGN506016E		1/4	.2500	8	34	79	DGN506081	8.1		.3189	10	47	89
DGN506064	6.4		.2520	8	34	79	DGN5060815	8.15		.3210	10	47	89
DGN506065	6.5		.2559	8	34	79	DGN506082	8.2		.3228	10	47	89
DGN506006L		F	.2570	8	34	79	DGN506083	8.3		.3268	10	47	89
DGN506066	6.6		.2598	8	34	79	DGN506021E		21/64	.3281	10	47	89
DGN5060665	6.65		.2620	8	34	79	DGN506084	8.4		.3307	10	47	89
DGN506067	6.7		.2638	8	34	79	DGN506017L		Q	.3320	10	47	89
DGN506017E		17/64	.2656	8	34	79	DGN506085	8.5		.3346	10	47	89
DGN506068	6.8		.2677	8	34	79	DGN5060856	8.56		.3371	10	47	89
DGN5060686	6.86		.2701	8	34	79	DGN506086	8.6		.3386	10	47	89
DGN506069	6.9		.2717	8	34	79	DGN5060864	8.64		.3402	10	47	89
DGN506070	7.0		.2756	8	34	79	DGN506087	8.7		.3425	10	47	89
DGN506010L		J	.2770	8	41	79	DGN506022E		11/32	.3438	10	47	89
DGN506071	7.1		.2795	8	41	79	DGN506088	8.8		.3465	10	47	89
DGN506018E		9/32	.2812	8	41	79	DGN5060886	8.86		.3488	10	47	89
DGN506072	7.2		.2835	8	41	79	DGN506089	8.9		.3504	10	47	89
DGN506073	7.3		.2874	8	41	79	DGN506090	9.0		.3543	10	47	89
DGN506074	7.4		.2913	8	41	79	DGN506091	9.1		.3583	10	47	89
DGN506075	7.5		.2953	8	41	79	DGN506023E		23/64	.3594	10	47	89
DGN506019E		19/64	.2969	8	41	79	DGN506092	9.2		.3622	10	47	89

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M					K																													
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron														
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




Z-COATED SOLID CARBIDE DREAM DRILLS - PRO with COOLANT HOLES

SERIES

DGN506

- ▶ Drilling for Carbon Steels, Alloy Steels (HB225 ~ HB325), Pre-hardened Steels (HRc30 ~ HRc50), Cast Iron
- ▶ Wave shape cutting edge to improve chip formation for low cutting force
- ▶ Helical thinning for low thrust, stable torque and good chip breakage
- ▶ Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology

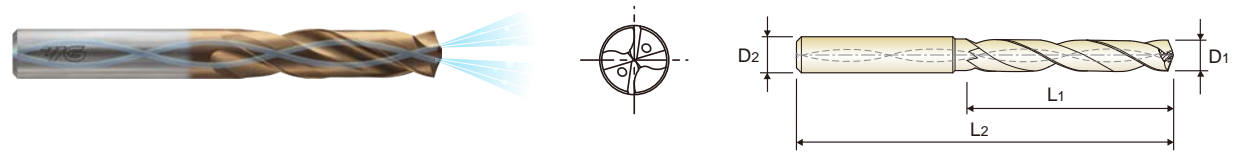

DIN 6537 CARBIDE 30° h6 m7 140° 20 bar Z Coating p.18

SHORT 3 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
Z-Coating	D1					
DGN506093	9.3		.3661	10	47	89
DGN506094	9.4		.3701	10	47	89
DGN506095	9.5		.3740	10	47	89
DGN506024F		3/8	.3750	10	47	89
DGN506096	9.6		.3780	10	47	89
DGN506097	9.7		.3819	10	47	89
DGN506098	9.8		.3858	10	47	89
DGN506099	9.9		.3898	10	47	89
DGN506025F		25/64	.3906	10	47	89
DGN506100	10.0		.3937	10	47	89
DGN506101	10.1		.3976	12	55	102
DGN506102	10.2		.4016	12	55	102
DGN506103	10.3		.4055	12	55	102
DGN506026F		13/32	.4062	12	55	102
DGN506104	10.4		.4094	12	55	102
DGN506105	10.5		.4134	12	55	102
DGN506106	10.6		.4173	12	55	102
DGN506107	10.7		.4212	12	55	102
DGN506027F		27/64	.4219	12	55	102
DGN506108	10.8		.4252	12	55	102
DGN5061086	10.86		.4276	12	55	102
DGN506109	10.9		.4291	12	55	102
DGN506110	11.0		.4330	12	55	102
DGN506111	11.1		.4370	12	55	102
DGN506028F		7/16	.4375	12	55	102
DGN506112	11.2		.4409	12	55	102

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
Z-Coating	D1					
DGN506113	11.3		.4448	12	55	102
DGN506114	11.4		.4488	12	55	102
DGN506115	11.5		.4527	12	55	102
DGN506029F		29/64	.4531	12	55	102
DGN506116	11.6		.4566	12	55	102
DGN506117	11.7		.4606	12	55	102
DGN506118	11.8		.4645	12	55	102
DGN506119	11.9		.4685	12	55	102
DGN506030F		15/32	.4688	12	55	102
DGN506120	12.0		.4724	12	55	102
DGN506121	12.1		.4764	14	60	107
DGN506122	12.2		.4803	14	60	107
DGN506123	12.3		.4843	14	60	107
DGN506031F		31/64	.4844	14	60	107
DGN506124	12.4		.4882	14	60	107
DGN506125	12.5		.4921	14	60	107
DGN506126	12.6		.4961	14	60	107
DGN506032E		1/2	.5000	14	60	107
DGN506129	12.9		.5079	14	60	107
DGN506130	13.0		.5118	14	60	107
DGN506131	13.1		.5157	14	60	107
DGN506132	13.2		.5197	14	60	107
DGN506133	13.3		.5236	14	60	107
DGN506134	13.4		.5276	14	60	107
DGN506034F		17/32	.5312	14	60	107
DGN506135	13.5		.5314	14	60	107

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013



Z-COATED SOLID CARBIDE DREAM DRILLS - PRO with COOLANT HOLES

SERIES

DGN508

- ▶ Drilling for Carbon Steels, Alloy Steels (HB 225 ~ HB325), Pre-hardened Steels (HRC30 ~ HRC50), Cast Iron
- ▶ Wave shape cutting edge to improve chip formation for low cutting force
- ▶ Helical thinning for low thrust, stable torque and good chip breakage
- ▶ Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology



DIN 6537 CARBIDE 30° h6 m7 140° 20 bar Z Coating p.18

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
Z-Coating	D1			D2	L1	L2	Z-Coating	D1			D2	L1	L2
DGN508010	1.0		.0394	3	8	55	DGN508030	3.0		.1181	6	28	66
DGN508011	1.1		.0433	3	12	55	DGN508031	3.1		.1220	6	28	66
DGN508012	1.2		.0472	3	12	55	DGN508008E		1/8	.1250	6	28	66
DGN508013	1.3		.0512	3	12	55	DGN508032	3.2		.1260	6	28	66
DGN508014	1.4		.0551	3	12	55	DGN508033	3.3		.1299	6	28	66
DGN508015	1.5		.0591	3	16	55	DGN508034	3.4		.1339	6	28	66
DGN508004E		1/16	.0625	3	16	55	DGN508035	3.5		.1378	6	28	66
DGN508016	1.6		.0630	3	16	55	DGN508009E		9/64	.1406	6	28	66
DGN508017	1.7		.0669	3	16	55	DGN508036	3.6		.1417	6	28	66
DGN508018	1.8		.0709	3	16	55	DGN508037	3.7		.1457	6	28	66
DGN508019	1.9		.0748	3	16	55	DGN508038	3.8		.1496	6	36	74
DGN508005E		5/64	.0781	3	16	55	DGN508039	3.9		.1535	6	36	74
DGN508020	2.0		.0787	4	21	57	DGN508010E		5/32	.1563	6	36	74
DGN508021	2.1		.0827	4	21	57	DGN508040	4.0		.1575	6	36	74
DGN508022	2.2		.0866	4	21	57	DGN508020G		#20	.1610	6	36	74
DGN508023	2.3		.0906	4	21	57	DGN508041	4.1		.1614	6	36	74
DGN508006E		3/32	.0938	4	21	57	DGN508042	4.2		.1654	6	36	74
DGN508024	2.4		.0945	4	21	57	DGN508043	4.3		.1693	6	36	74
DGN508025	2.5		.0984	4	21	57	DGN508011E		11/64	.1719	6	36	74
DGN508026	2.6		.1024	4	21	57	DGN508044	4.4		.1732	6	36	74
DGN508027	2.7		.1063	4	21	57	DGN508045	4.5		.1772	6	36	74
DGN508007E		7/64	.1094	4	21	57	DGN508046	4.6		.1811	6	36	74
DGN508028	2.8		.1102	4	21	57	DGN508047	4.7		.1850	6	36	74
DGN508029	2.9		.1142	4	21	57	DGN508012E		3/16	.1875	6	44	82

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																						

Z-COATED SOLID CARBIDE DREAM DRILLS - PRO with COOLANT HOLES

SERIES

DGN508

- ▶ Drilling for Carbon Steels, Alloy Steels (HB 225 ~ HB325), Pre-hardened Steels (HRC30 ~ HRC50), Cast Iron
- ▶ Wave shape cutting edge to improve chip formation for low cutting force
- ▶ Helical thinning for low thrust, stable torque and good chip breakage
- ▶ Extremely high hardness and heat resistance due to YG-1 special Z-Coating technology



DIN 6537 CARBIDE 30° h6 m7 140° 20 bar Z Coating p.18

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
Z-Coating	D1			D2	L1	L2	Z-Coating	D1			D2	L1	L2
DGN508048	4.8		.1890	6	44	82	DGN508066	6.6		.2598	8	53	91
DGN508049	4.9		.1929	6	44	82	DGN508067	6.7		.2638	8	53	91
DGN508050	5.0		.1969	6	44	82	DGN508017E		17/64	.2656	8	53	91
DGN508051	5.1		.2008	6	44	82	DGN508068	6.8		.2677	8	53	91
DGN508013E		13/64	.2031	6	44	82	DGN508069	6.9		.2717	8	53	91
DGN508052	5.2		.2047	6	44	82	DGN508070	7.0		.2756	8	53	91
DGN508053	5.3		.2087	6	44	82	DGN508071	7.1		.2795	8	53	91
DGN508054	5.4		.2126	6	44	82	DGN508018E		9/32	.2812	8	53	91
DGN508003G		#3	.2130	6	44	82	DGN508072	7.2		.2835	8	53	91
DGN508055	5.5		.2165	6	44	82	DGN508073	7.3		.2874	8	53	91
DGN508014E		7/32	.2188	6	44	82	DGN508074	7.4		.2913	8	53	91
DGN508056	5.6		.2205	6	44	82	DGN508075	7.5		.2953	8	53	91
DGN508057	5.7		.2244	6	44	82	DGN508019E		19/64	.2969	8	53	91
DGN508058	5.8		.2283	6	44	82	DGN508076	7.6		.2992	8	53	91
DGN508059	5.9		.2323	6	44	82	DGN508077	7.7		.3031	8	53	91
DGN508015E		15/64	.2344	6	44	82	DGN508078	7.8		.3071	8	53	91
DGN508060	6.0		.2362	6	44	82	DGN508079	7.9		.3110	8	53	91
DGN508061	6.1		.2402	8	53	91	DGN508020E		5/16	.3125	8	53	91
DGN508062	6.2		.2441	8	53	91	DGN508080	8.0		.3150	8	53	91
DGN508063	6.3		.2480	8	53	91	DGN508081	8.1		.3189	10	61	103
DGN508016E		1/4	.2500	8	53	91	DGN508082	8.2		.3228	10	61	103
DGN508064	6.4		.2520	8	53	91	DGN508083	8.3		.3268	10	61	103
DGN508065	6.5		.2559	8	53	91	DGN508021E		21/64	.3281	10	61	103
DGN508006L		F	.2570	8	53	91	DGN508084	8.4		.3307	10	61	103

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended																						

DGN506, DGN508 SERIES with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter			SFM	Drill Diameter									
				METRIC	1.0	2.0		METRIC	3.0	-	4.0	-	5.0	6.0	-	-	8.0
				FRACTIONAL	-	-		FRACTIONAL	-	1/8	-	3/16	-	-	1/4	5/16	-
DECIMAL	.0394	.0787	DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500	.3125	.3150					
P	2	Non-alloy steel	312	RPM	30240	15120	427	RPM	13790	10350	8280	6900	5170				
			FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094						
			312	RPM	30240	15120	427	RPM	13790	10350	8280	6900	5170				
	FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094								
	4	Non-alloy steel	312	RPM	30240	15120	427	RPM	13790	10350	8280	6900	5170				
			FEED	.0012-.0020	.0020-.0028	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071	.0055-.0079						
	5	Non-alloy steel	279	RPM	27060	13530	361	RPM	11670	8750	7000	5840	4380				
			FEED	.0012-.0020	.0020-.0028	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071	.0055-.0079						
	6	Low alloy steel	312	RPM	30240	15120	427	RPM	13790	10350	8280	6900	5170				
			FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094						
279			RPM	27060	13530	361	RPM	11670	8750	7000	5840	4380					
FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0039-.0079	.0047-.0094	.0063-.0110									
8	Low alloy steel	312	RPM	30240	15120	361	RPM	11670	8750	7000	5840	4380					
		FEED	.0008-.0016	.0012-.0020	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071	.0055-.0079							
9	Low alloy steel	164	RPM	15920	7960	197	RPM	6370	4770	3820	3180	2390					
		FEED	.0008-.0016	.0012-.0020	FEED	.0012-.0031	.0020-.0043	.0031-.0055	.0039-.0063	.0047-.0071							
10	High alloyed steel, and tool steel	230	RPM	22280	11140	295	RPM	9550	7160	5730	4770	3580					
		FEED	.0012-.0020	.0020-.0028	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071	.0055-.0079							
11	High alloyed steel, and tool steel	148	RPM	14320	7160	164	RPM	5310	3980	3180	2650	1990					
		FEED	.0008-.0016	.0012-.0020	FEED	.0012-.0031	.0020-.0043	.0031-.0055	.0039-.0063	.0047-.0071							
M	Stainless steel	246	RPM	23870	11940	311	RPM	10080	7560	6050	5040	3780					
		FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094							
13	Stainless steel	180	RPM	17510	8750	213	RPM	6900	5170	4140	3450	2590					
		FEED	.0008-.0016	.0012-.0020	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071	.0055-.0079							
K	15	Grey cast iron	312	RPM	30240	15120	427	RPM	13790	10350	8280	6900	5170				
			FEED	.0016-.0024	.0016-.0024	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102	.0087-.0110						
	16	Grey cast iron	295	RPM	28650	14320	377	RPM	12200	9150	7320	6100	4580				
			FEED	.0016-.0024	.0016-.0024	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094						
	17	Nodular cast iron	361	RPM	35010	17510	475	RPM	15380	11540	9230	7690	5770				
FEED			.0016-.0024	.0016-.0024	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102	.0087-.0110							
18	Nodular cast iron	246	RPM	23870	11940	312	RPM	10080	7560	6050	5040	3780					
		FEED	.0016-.0024	.0016-.0024	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094							
19	Malleable cast iron	279	RPM	27060	13530	361	RPM	11670	8750	7000	5840	4380					
		FEED	.0016-.0024	.0016-.0024	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102	.0087-.0110							
20	Malleable cast iron	246	RPM	23870	11940	312	RPM	10080	7560	6050	5040	3780					
		FEED	.0012-.0020	.0020-.0028	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087	.0071-.0094							
H	38	Hardened steel	98	RPM	9550	4770	115	RPM	3710	2790	2230	1860	1390				
			FEED	.0004-.0008	.0004-.0012	FEED	.0004-.0012	.0004-.0016	.0008-.0020	.0012-.0024	.0012-.0024						

► Recommend to reduce the feed rate as following
Feed 100% : DGN506(3xD) Feed 80% : DGN508(5xD)

► NEXT PAGE

DGN506, DGN508 SERIES with COOLANT HOLES


SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter											
				METRIC	-	10.0	12.0	-	14.0	-	-	16.0	18.0	-	20.0
				FRACTIONAL	3/8	-	-	1/2	-	9/16	5/8	-	-	3/4	-
DECIMAL	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874				
P	2	Non-alloy steel	427	RPM	4140	3450	3270	2960	2590	2300	2180	2070			
			FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157				
			427	RPM	4140	3450	3270	2960	2590	2300	2180	2070			
	FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157						
	4	Non-alloy steel	427	RPM	4140	3450	3270	2960	2590	2300	2180	2070			
			FEED	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126				
	5	Non-alloy steel	361	RPM	3500	2920	2760	2500	2190	1950	1840	1750			
			FEED	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126				
	6	Low alloy steel	427	RPM	4140	3450	3270	2960	2590	2300	2180	2070			
			FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157				
361			RPM	3500	2920	2760	2500	2190	1950	1840	1750				
FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157							
8	Low alloy steel	361	RPM	3500	2920	2760	2500	2190	1950	1840	1750				
		FEED	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126					
9	Low alloy steel	197	RPM	1910	1590	1510	1360	1190	1060	1010	950				
		FEED	.0051-.0075	.0055-.0079	.0055-.0079	.0059-.0083	.0063-.0087	.0067-.0098	.0063-.0102	.0071-.0110					
10	High alloyed steel, and tool steel	295	RPM	2860	2390	2260	2050	1790	1590	1510	1430				
		FEED	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126					
11	High alloyed steel, and tool steel	164	RPM	1590	1330	1260	1140	990	880	840	800				
		FEED	.0051-.0075	.0055-.0079	.0055-.0079	.0059-.0083	.0063-.0087	.0067-.0098	.0063-.0102	.0071-.0110					
M	Stainless steel	311	RPM	3020	2520	2380	2160	1890	1680	1590	1510				
		FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157					
13	Stainless steel	213	RPM	2070	1720	1630	1480	1290	1150	1090	1030				
		FEED	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126					
K	15	Grey cast iron	427	RPM	4140	3450	3270	2960	2590	2300	2180	2070			
			FEED	.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173				
	16	Grey cast iron	377	RPM	3660	3050	2890	2610	2290	2030	1930	1830			
			FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157				
	17	Nodular cast iron	475	RPM	4620	3850	3630	3300	2880	2560	2420	2310			
FEED			.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173					
18	Nodular cast iron	312	RPM	3020	2520	2390	2160	1890	1680	1590	1510				
		FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157					
19	Malleable cast iron	361	RPM	3500	2920	2760	2500	2190	1950	1840	1750				
		FEED	.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173					
20	Malleable cast iron	312	RPM	3020	2520	2390	2160	1890	1680	1590	1510				
		FEED	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157					
H	38	Hardened steel	115	RPM	1100	930	880	800	700	620	590	560			
			FEED	.0016-.0028	.0016-.0031	.0016-.0031	.0020-.0035	.0020-.0035	.0020-.0039	.0020-.0039	.0020-.0039				

► Recommend to reduce the feed rate as following
Feed 100% : DGN506(3xD) Feed 100% : DGN508(5xD)




Global Cutting Tool Leader **YG-1**



DREAM DRILLS



Leading Through Innovation

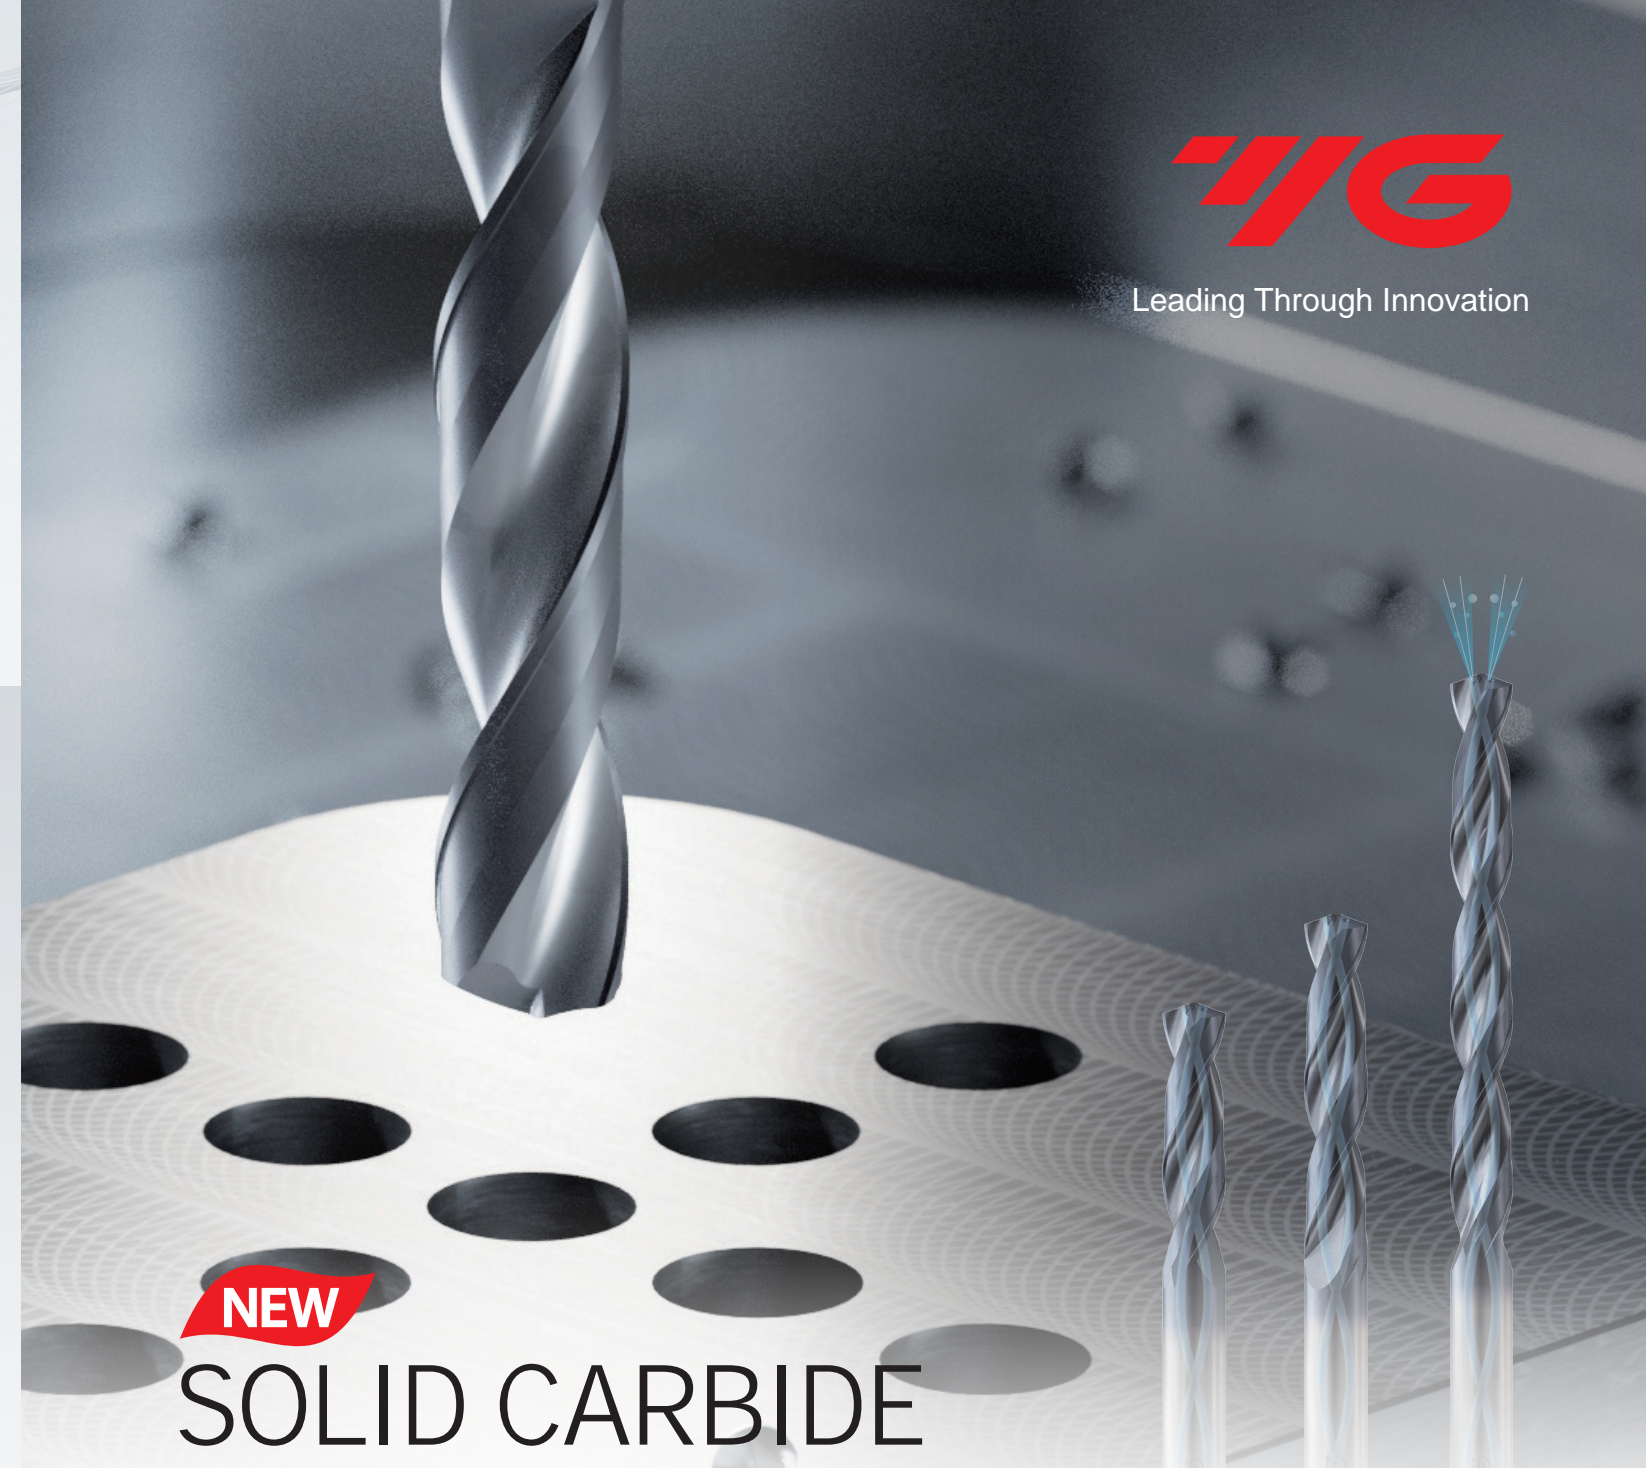

NEW

SOLID CARBIDE

DREAM DRILL X

- Multi-Purpose Solid Carbide Drilling up to HRc50
- Proprietary coating upgrade boosting performance in Steel and Cast-Iron applications

NEW
DREAM DRILL X

New Coating Technology "RCH-Coating"

Combining the major benefits of TiAlN and AlCrN into a new 'Nano Layered Multilayer' coating generation provides unique advantages such as:



Extreme Wear Resistance




High Heat Endurance



Chipping Protection

↑ Tool Life
compared to Normal TiAlN coated drills
20 to 50%


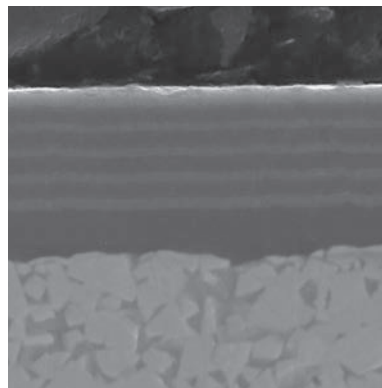


Nano Layered Multilayer
Carbide

At insufficient coolant conditions where higher temperatures occur, **RCH-Coating** allows with its very high temperature stability for great tool life results.

FEATURES & BENEFITS

- **Universal Point Grinding**
Soft cutting action and reduced axial forces; Easy to Recondition
- **Radius Thinning**
Provides very good self centering even at low feed rates and unstable situations
- **Tailored Flute Design**
Excellent chip breaking and evacuation
- **Edge Preparation**
Maximizing tool life in various materials

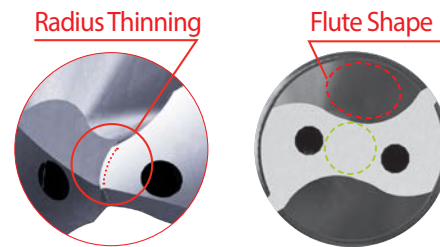


Negative Land (Honing)

CASE STUDY


► **SOLID CARBIDE DREAM DRILL X with Coolant Holes**

Cutting Condition

Work Material	- AISI : 1045 - DIN : C45 - JIS : S45C (HRc20)
Drill Diameter(mm)	Ø10.0 (.3937 inch)
Cutting Speed	360 ft/min.
Feed	.009 inch/rev.
Drilling Depth	1.574"
Coolant	Internal Cooling Wet Cut (9% Emulsion)
Machine	Vertical Machine

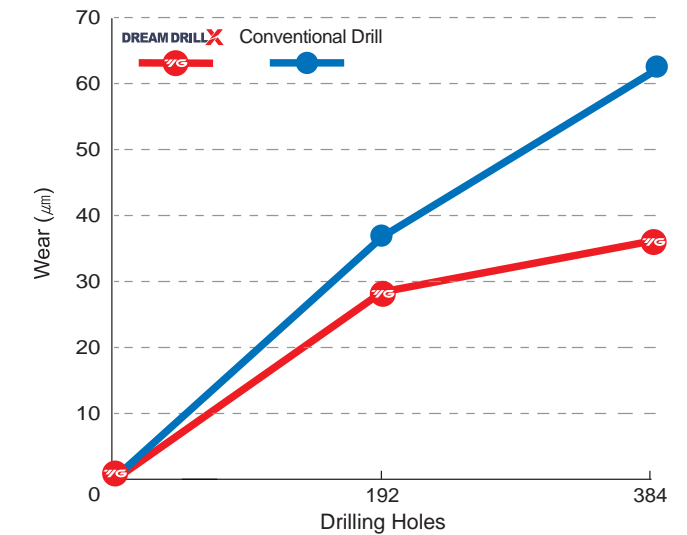

DREAM DRILL X

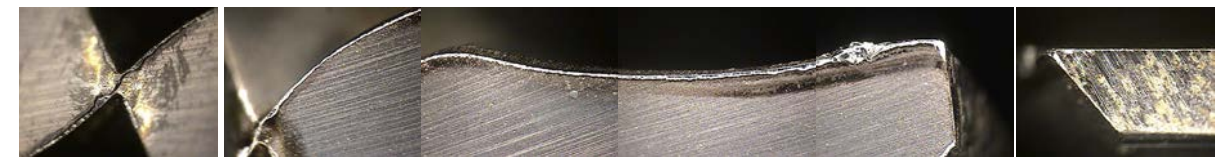

Total Drilling 384 Holes

Conventional Drill




Total Drilling 384 Holes

► **SOLID CARBIDE DREAM DRILL X with Coolant Holes**

Cutting Condition

Work Material	- AISI : 60-40-18 - DIN : GGG40 - JIS : FCD400
Drill Diameter(mm)	Ø8.5 (.3346)
Cutting Speed	367 ft/min.
Feed	.0129 inch/rev.
Drilling Depth	.708"
Coolant	Internal Cooling
Machine	Machining Center (Horizontal)

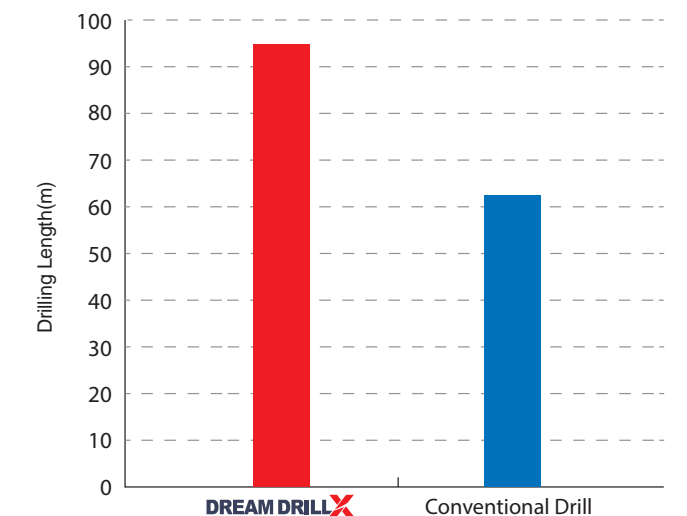

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

NEW **DTX416**
DTX711

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



CARBIDE h6 140° 20 bar RCH Coating p.52

SHORT
3 x D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
RCH-Coating	D1		D2	L1	L2	RCH-Coating	D1		D2	L1	L2
DTX711008	1/8	.1250	3/16	1.102	2.992	DTX416217	Q	.3320	11/32	1.673	3.937
DTX416008	1/8	.1250	15/64	1.102	2.992	DTX711022	11/32	.3438	3/8	1.772	3.937
DTX711011	11/64	.1719	3/16	1.417	3.386	DTX416022	11/32	.3438	11/32	1.772	3.937
DTX416011	11/64	.1719	15/64	1.417	3.386	DTX711023	23/64	.3594	3/8	1.870	4.174
DTX711012	3/16	.1875	3/16	1.575	3.543	DTX416023	23/64	.3594	25/64	1.870	4.174
DTX416012	3/16	.1875	15/64	1.575	3.543	DTX711221	U	.3680	3/8	1.870	4.174
DTX711013	13/64	.2031	1/4	1.082	3.228	DTX416221	U	.3680	25/64	1.870	4.174
DTX416013	13/64	.2031	15/64	1.082	3.228	DTX711024	3/8	.3750	3/8	1.969	4.174
DTX711014	7/32	.2188	1/4	1.181	3.228	DTX416024	3/8	.3750	25/64	1.969	4.174
DTX416014	7/32	.2188	15/64	1.181	3.228	DTX711025	25/64	.3906	7/16	1.969	4.174
DTX711015	15/64	.2344	1/4	1.181	3.228	DTX416025	25/64	.3906	25/64	1.969	4.174
DTX416015	15/64	.2344	15/64	1.181	3.228	DTX711026	13/32	.4063	7/16	2.067	4.567
DTX711016	1/4	.2500	1/4	1.279	3.465	DTX416026	13/32	.4063	27/64	2.067	4.567
DTX416016	1/4	.2500	17/64	1.279	3.465	DTX711027	27/64	.4219	7/16	2.165	4.567
DTX711206	F	.2570	5/16	1.279	3.465	DTX416027	27/64	.4219	27/64	2.165	4.567
DTX416206	F	.2570	17/64	1.279	3.465	DTX711028	7/16	.4375	7/16	2.264	4.803
DTX711017	17/64	.2656	5/16	1.378	3.465	DTX416028	7/16	.4375	15/32	2.264	4.803
DTX416017	17/64	.2656	17/64	1.378	3.465	DTX711029	29/64	.4531	1/2	2.264	4.803
DTX711209	I	.2720	5/16	1.378	3.465	DTX416029	29/64	.4531	15/32	2.264	4.803
DTX416209	I	.2720	.2720	1.378	3.465	DTX711030	15/32	.4688	1/2	2.362	4.803
DTX416018	9/32	.2813	5/16	1.476	3.701	DTX416030	15/32	.4688	15/32	2.362	4.803
DTX416019	19/64	.2969	5/16	1.476	3.701	DTX416031	31/64	.4844	1/2	2.461	5.039
DTX416020	5/16	.3125	5/16	1.575	3.701	DTX416032	1/2	.5000	1/2	2.559	5.039
DTX711021	21/64	.3281	3/8	1.673	3.937	DTX711033	33/64	.5156	9/16	2.657	5.276
DTX416021	21/64	.3281	11/32	1.673	3.937	DTX416033	33/64	.5156	35/64	2.657	5.276
DTX711217	Q	.3320	3/8	1.673	3.937	DTX711034	17/32	.5313	9/16	2.756	5.276

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25			
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB																				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323											15	30	25	38	34			55	60	42	55
HRC											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB																					
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

NEW **DTX416**
DTX711

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



CARBIDE h6 140° 20 bar RCH Coating p.52

SHORT
3 x D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
RCH-Coating	D1		D2	L1	L2	RCH-Coating	D1		D2	L1	L2
DTX416034	17/32	.5313	35/64	2.756	5.276	DTX711037	37/64	.5781	5/8	2.953	5.512
DTX711035	35/64	.5469	9/16	2.756	5.276	DTX416037	37/64	.5781	37/64	2.953	5.512
DTX416035	35/64	.5469	35/64	2.756	5.276	DTX416038	19/32	.5938	5/8	3.051	5.709
DTX711036	9/16	.5625	9/16	2.854	5.512	DTX416039	39/64	.6094	5/8	3.051	5.709
DTX416036	9/16	.5625	37/64	2.854	5.512	DTX416040	5/8	.6250	5/8	3.150	5.709

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25			
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
HB																				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323											15	30	25	38	34			55	60	42	55
HRC											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB																					
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

NEW **DTX406** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

SHORT 3 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX406070	7.0		.2756	8	34	79	DTX406090	9.0		.3543	10	47	89
DTX406071	7.1		.2795	8	41	79	DTX406091	9.1		.3583	10	47	89
DTX406018F	7.144	9/32	.2812	8	41	79	DTX406023F	9.128	23/64	.3594	10	47	89
DTX406072	7.2		.2835	8	41	79	DTX406092	9.2		.3622	10	47	89
DTX406073	7.3		.2874	8	41	79	DTX406093	9.3		.3661	10	47	89
DTX406074	7.4		.2913	8	41	79	DTX406021L	9.347	U	.3680	10	47	89
DTX406075	7.5		.2953	8	41	79	DTX406094	9.4		.3701	10	47	89
DTX406019F	7.541	19/64	.2969	8	41	79	DTX406095	9.5		.3740	10	47	89
DTX406076	7.6		.2992	8	41	79	DTX406024F	9.525	3/8	.3750	10	47	89
DTX406077	7.7		.3031	8	41	79	DTX406096	9.6		.3780	10	47	89
DTX406078	7.8		.3071	8	41	79	DTX406097	9.7		.3819	10	47	89
DTX406079	7.9		.3110	8	41	79	DTX406098	9.8		.3858	10	47	89
DTX406020F	7.938	5/16	.3125	8	41	79	DTX406099	9.9		.3898	10	47	89
DTX406080	8.0		.3150	8	41	79	DTX406025F	9.922	25/64	.3906	10	47	89
DTX406081	8.1		.3189	10	47	89	DTX406100	10.0		.3937	10	47	89
DTX406082	8.2		.3228	10	47	89	DTX406101	10.1		.3976	12	55	102
DTX406083	8.3		.3268	10	47	89	DTX406102	10.2		.4016	12	55	102
DTX406021F	8.334	21/64	.3281	10	47	89	DTX406103	10.3		.4055	12	55	102
DTX406084	8.4		.3307	10	47	89	DTX406026F	10.319	13/32	.4062	12	55	102
DTX406017L	8.433	Q	.3320	10	47	89	DTX406104	10.4		.4094	12	55	102
DTX406085	8.5		.3346	10	47	89	DTX406105	10.5		.4134	12	55	102
DTX406086	8.6		.3386	10	47	89	DTX406106	10.6		.4173	12	55	102
DTX406087	8.7		.3425	10	47	89	DTX406107	10.7		.4212	12	55	102
DTX406022F	8.731	11/32	.3438	10	47	89	DTX406027F	10.716	27/64	.4219	12	55	102
DTX406088	8.8		.3465	10	47	89	DTX406108	10.8		.4252	12	55	102
DTX406089	8.9		.3504	10	47	89	DTX406109	10.9		.4291	12	55	102

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

NEW **DTX406** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

SHORT 3 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX406110	11.0		.4330	12	55	102	DTX406132	13.2		.5197	14	60	107
DTX406111	11.1		.4370	12	55	102	DTX406133	13.3		.5236	14	60	107
DTX406028F	11.113	7/16	.4375	12	55	102	DTX406134	13.4		.5276	14	60	107
DTX406112	11.2		.4409	12	55	102	DTX406135	13.5		.5314	14	60	107
DTX406113	11.3		.4448	12	55	102	DTX406136	13.6		.5354	14	60	107
DTX406114	11.4		.4488	12	55	102	DTX406137	13.7		.5394	14	60	107
DTX406115	11.5		.4527	12	55	102	DTX406138	13.8		.5433	14	60	107
DTX406029F	11.509	29/64	.4531	12	55	102	DTX406139	13.9		.5472	14	60	107
DTX406116	11.6		.4566	12	55	102	DTX406140	14.0		.5512	14	60	107
DTX406117	11.7		.4606	12	55	102	DTX406141	14.1		.5551	16	65	115
DTX406118	11.8		.4645	12	55	102	DTX406142	14.2		.5591	16	65	115
DTX406119	11.9		.4685	12	55	102	DTX406036F	14.288	9/16	.5625	16	65	115
DTX406030F	11.906	15/32	.4688	12	55	102	DTX406143	14.3		.5630	16	65	115
DTX406120	12.0		.4724	12	55	102	DTX406144	14.4		.5669	16	65	115
DTX406121	12.1		.4764	14	60	107	DTX406145	14.5		.5708	16	65	115
DTX406122	12.2		.4803	14	60	107	DTX406146	14.6		.5748	16	65	115
DTX406123	12.3		.4843	14	60	107	DTX406147	14.7		.5787	16	65	115
DTX406031F	12.303	31/64	.4844	14	60	107	DTX406148	14.8		.5827	16	65	115
DTX406124	12.4		.4882	14	60	107	DTX406149	14.9		.5866	16	65	115
DTX406125	12.5		.4921	14	60	107	DTX406150	15.0		.5905	16	65	115
DTX406126	12.6		.4961	14	60	107	DTX406151	15.1		.5945	16	65	115
DTX406032F	12.7	1/2	.5000	14	60	107	DTX406152	15.2		.5984	16	65	115
DTX406128	12.8		.5039	14	60	107	DTX406153	15.3		.6024	16	65	115
DTX406129	12.9		.5079	14	60	107	DTX406154	15.4		.6063	16	65	115
DTX406130	13.0		.5118	14	60	107	DTX406155	15.5		.6102	16	65	115
DTX406131	13.1		.5157	14	60	107	DTX406156	15.6		.6142	16	65	115

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	○


ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES

NEW DTX408

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

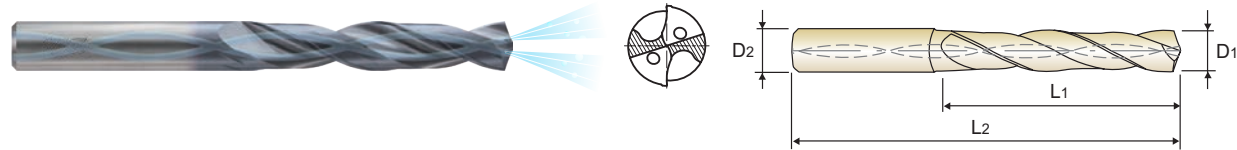

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX408014F	5.556	7/32	.2188	6	44	82
DTX408056	5.6		.2205	6	44	82
DTX408057	5.7		.2244	6	44	82
DTX408058	5.8		.2283	6	44	82
DTX408059	5.9		.2323	6	44	82
DTX408015F	5.953	15/64	.2344	6	44	82
DTX408060	6.0		.2362	6	44	82
DTX408061	6.1		.2402	8	53	91
DTX408062	6.2		.2441	8	53	91
DTX408063	6.3		.2480	8	53	91
DTX408016F	6.350	1/4	.2500	8	53	91
DTX408064	6.4		.2520	8	53	91
DTX408065	6.5		.2559	8	53	91
DTX408006L	6.528	F	.2570	8	53	91
DTX408066	6.6		.2598	8	53	91
DTX408067	6.7		.2638	8	53	91
DTX408017F	6.747	17/64	.2656	8	53	91
DTX408068	6.8		.2677	8	53	91
DTX408069	6.9		.2717	8	53	91
DTX408009L	6.909	I	.2720	8	53	91
DTX408070	7.0		.2756	8	53	91
DTX408071	7.1		.2795	8	53	91
DTX408018F	7.144	9/32	.2812	8	53	91
DTX408072	7.2		.2835	8	53	91
DTX408073	7.3		.2874	8	53	91
DTX408074	7.4		.2913	8	53	91
DTX408075	7.5		.2953	8	53	91
DTX408019F	7.541	19/64	.2969	8	53	91

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	○	◎	○	

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○										

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES

NEW DTX408

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX408097	9.7		.3819	10	61	103
DTX408098	9.8		.3858	10	61	103
DTX408099	9.9		.3898	10	61	103
DTX408025F	9.922	25/64	.3906	10	61	103
DTX408100	10.0		.3937	10	61	103
DTX408101	10.1		.3976	12	71	118
DTX408102	10.2		.4016	12	71	118
DTX408103	10.3		.4055	12	71	118
DTX408026F	10.319	13/32	.4062	12	71	118
DTX408104	10.4		.4094	12	71	118
DTX408105	10.5		.4134	12	71	118
DTX408106	10.6		.4173	12	71	118
DTX408107	10.7		.4212	12	71	118
DTX408027F	10.716	27/64	.4219	12	71	118
DTX408108	10.8		.4252	12	71	118
DTX408109	10.9		.4291	12	71	118
DTX408110	11.0		.4330	12	71	118
DTX408111	11.1		.4370	12	71	118
DTX408028F	11.113	7/16	.4375	12	71	118
DTX408112	11.2		.4409	12	71	118
DTX408113	11.3		.4448	12	71	118
DTX408114	11.4		.4488	12	71	118
DTX408115	11.5		.4527	12	71	118
DTX408029F	11.509	29/64	.4531	12	71	118
DTX408116	11.6		.4566	12	71	118
DTX408117	11.7		.4606	12	71	118
DTX408118	11.8		.4645	12	71	118
DTX408119	11.9		.4685	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	○	◎	○	

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											○										

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES
NEW DTX408

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

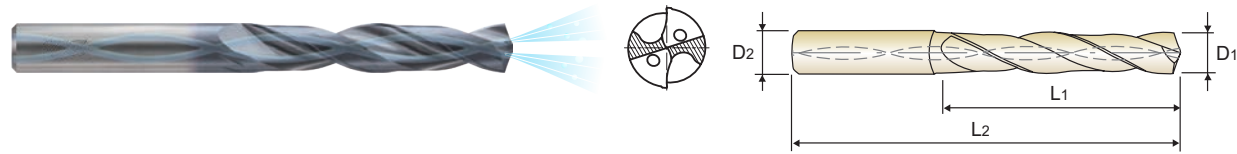

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX408145	14.5		.5708	16	83	133
DTX408146	14.6		.5748	16	83	133
DTX408147	14.7		.5787	16	83	133
DTX408148	14.8		.5827	16	83	133
DTX408149	14.9		.5866	16	83	133
DTX408150	15.0		.5905	16	83	133
DTX408151	15.1		.5945	16	83	133
DTX408152	15.2		.5984	16	83	133
DTX408153	15.3		.6024	16	83	133
DTX408154	15.4		.6063	16	83	133
DTX408155	15.5		.6102	16	83	133
DTX408156	15.6		.6142	16	83	133
DTX408157	15.7		.6181	16	83	133
DTX408158	15.8		.6220	16	83	133
DTX408040F	15.875	5/8	.6250	16	83	133
DTX408159	15.9		.6260	16	83	133
DTX408160	16.0		.6299	16	83	133
DTX408161	16.1		.6339	18	93	143
DTX408162	16.2		.6378	18	93	143
DTX408163	16.3		.6417	18	93	143
DTX408164	16.4		.6457	18	93	143
DTX408165	16.5		.6495	18	93	143
DTX408166	16.6		.6535	18	93	143
DTX408167	16.7		.6575	18	93	143
DTX408168	16.8		.6614	18	93	143
DTX408169	16.9		.6654	18	93	143
DTX408170	17.0		.6692	18	93	143
DTX408171	17.1		.6732	18	93	143
DTX408172	17.2		.6772	18	93	143

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX408173	17.3		.6811	18	93	143
DTX408174	17.4		.6850	18	93	143
DTX408175	17.5		.6889	18	93	143
DTX408176	17.6		.6929	18	93	143
DTX408177	17.7		.6968	18	93	143
DTX408178	17.8		.7008	18	93	143
DTX408179	17.9		.7047	18	93	143
DTX408180	18.0		.7087	18	93	143
DTX408181	18.1		.7126	20	101	153
DTX408182	18.2		.7165	20	101	153
DTX408183	18.3		.7205	20	101	153
DTX408184	18.4		.7244	20	101	153
DTX408185	18.5		.7283	20	101	153
DTX408186	18.6		.7323	20	101	153
DTX408187	18.7		.7362	20	101	153
DTX408188	18.8		.7402	20	101	153
DTX408189	18.9		.7441	20	101	153
DTX408190	19.0		.7480	20	101	153
DTX408048F	19.050	3/4	.7500	20	101	153
DTX408191	19.1		.7520	20	101	153
DTX408192	19.2		.7559	20	101	153
DTX408193	19.3		.7598	20	101	153
DTX408194	19.4		.7638	20	101	153
DTX408195	19.5		.7676	20	101	153
DTX408196	19.6		.7717	20	101	153
DTX408197	19.7		.7756	20	101	153
DTX408198	19.8		.7795	20	101	153
DTX408199	19.9		.7835	20	101	153
DTX408200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES
NEW DTX421

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

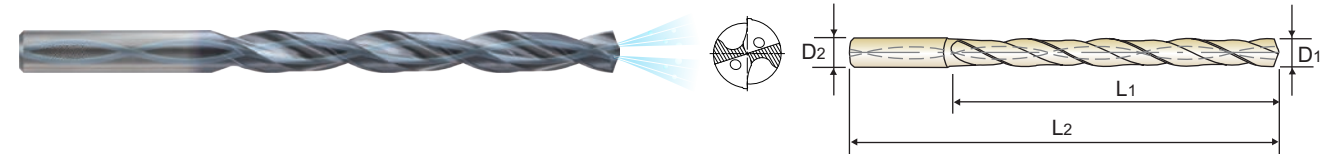

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX421030	3.0		.1181	6	34	72
DTX421031	3.1		.1220	6	34	72
DTX421008F	3.175	1/8	.1250	6	34	72
DTX421032	3.2		.1260	6	34	72
DTX421033	3.3		.1299	6	34	72
DTX421034	3.4		.1339	6	34	72
DTX421029G	3.450	#29	.1360	6	34	72
DTX421035	3.5		.1378	6	34	72
DTX421009F	3.572	9/64	.1406	6	34	72
DTX421036	3.6		.1417	6	34	72
DTX421037	3.7		.1457	6	34	72
DTX421038	3.8		.1496	6	43	81
DTX421039	3.9		.1535	6	43	81
DTX421010F	3.969	5/32	.1563	6	43	81
DTX421040	4.0		.1575	6	43	81
DTX421021G	4.040	#21	.1590	6	43	81
DTX421041	4.1		.1614	6	43	81
DTX421042	4.2		.1654	6	43	81
DTX421043	4.3		.1693	6	43	81
DTX421011F	4.366	11/64	.1719	6	43	81
DTX421044	4.4		.1732	6	43	81
DTX421045	4.5		.1772	6	43	81
DTX421046	4.6		.1811	6	43	81
DTX421047	4.7		.1850	6	43	81
DTX421012F	4.763	3/16	.1875	6	57	95
DTX421048	4.8		.1890	6	57	95

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX421049	4.9		.1929	6	57	95
DTX421050	5.0		.1969	6	57	95
DTX421051	5.1		.2008	6	57	95
DTX421013F	5.159	13/64	.2031	6	57	95
DTX421052	5.2		.2047	6	57	95
DTX421053	5.3		.2087	6	57	95
DTX421054	5.4		.2126	6	57	95
DTX421055	5.5		.2165	6	57	95
DTX421014F	5.556	7/32	.2188	6	57	95
DTX421056	5.6		.2205	6	57	95
DTX421057	5.7		.2244	6	57	95
DTX421058	5.8		.2283	6	57	95
DTX421059	5.9		.2323	6	57	95
DTX421015F	5.953	15/64	.2344	6	57	95
DTX421060	6.0		.2362	6	57	95
DTX421061	6.1		.2402	8	76	114
DTX421062	6.2		.2441	8	76	114
DTX421063	6.3		.2480	8	76	114
DTX421016F	6.350	1/4	.2500	8	76	114
DTX421064	6.4		.2520	8	76	114
DTX421065	6.5		.2559	8	76	114
DTX421006L	6.528	F	.2570	8	76	114
DTX421066	6.6		.2598	8	76	114
DTX421067	6.7		.2638	8	76	114
DTX421017F	6.747	17/64	.2656	8	76	114
DTX421068	6.8		.2677	8	76	114

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES
NEW DTX421

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

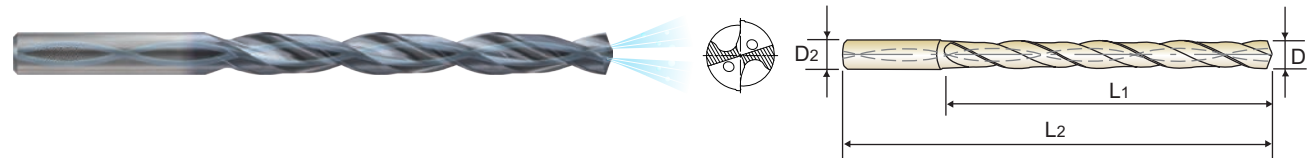

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

EXTRA LONG
8 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX421069	6.9		.2717	8	76	114	DTX421088	8.8		.3465	10	95	142
DTX421009L	6.909	I	.2720	8	76	114	DTX421089	8.9		.3504	10	95	142
DTX421070	7.0		.2756	8	76	114	DTX421090	9.0		.3543	10	95	142
DTX421071	7.1		.2795	8	76	114	DTX421091	9.1		.3583	10	95	142
DTX421018F	7.144	9/32	.2813	8	76	114	DTX421023F	9.128	23/64	.3594	10	95	142
DTX421072	7.2		.2835	8	76	114	DTX421092	9.2		.3622	10	95	142
DTX421073	7.3		.2874	8	76	114	DTX421093	9.3		.3661	10	95	142
DTX421074	7.4		.2913	8	76	114	DTX421021L	9.350	U	.3680	10	95	142
DTX421075	7.5		.2953	8	76	114	DTX421094	9.4		.3701	10	95	142
DTX421019F	7.541	19/64	.2969	8	76	114	DTX421095	9.5		.3740	10	95	142
DTX421076	7.6		.2992	8	76	114	DTX421024F	9.525	3/8	.3750	10	95	142
DTX421077	7.7		.3031	8	76	114	DTX421096	9.6		.3780	10	95	142
DTX421078	7.8		.3071	8	76	114	DTX421097	9.7		.3819	10	95	142
DTX421079	7.9		.3110	8	76	114	DTX421098	9.8		.3858	10	95	142
DTX421020F	7.938	5/16	.3125	8	76	114	DTX421099	9.9		.3898	10	95	142
DTX421080	8.0		.3150	8	76	114	DTX421025F	9.922	25/64	.3906	10	95	142
DTX421081	8.1		.3189	10	95	142	DTX421100	10.0		.3937	10	95	142
DTX421082	8.2		.3228	10	95	142	DTX421101	10.1		.3976	12	114	162
DTX421083	8.3		.3268	10	95	142	DTX421102	10.2		.4016	12	114	162
DTX421021F	8.334	21/64	.3281	10	95	142	DTX421103	10.3		.4055	12	114	162
DTX421084	8.4		.3307	10	95	142	DTX421026F	10.319	13/32	.4063	12	114	162
DTX421017L	8.430	Q	.3320	10	95	142	DTX421104	10.4		.4094	12	114	162
DTX421085	8.5		.3346	10	95	142	DTX421105	10.5		.4134	12	114	162
DTX421086	8.6		.3386	10	95	142	DTX421106	10.6		.4173	12	114	162
DTX421087	8.7		.3425	10	95	142	DTX421107	10.7		.4212	12	114	162
DTX421022F	8.731	11/32	.3438	10	95	142	DTX421027F	10.716	27/64	.4219	12	114	162

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34						15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

SERIES
NEW DTX421

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

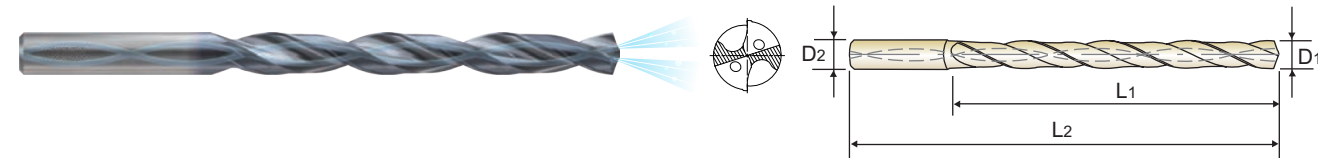

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

EXTRA LONG
8 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX421108	10.8		.4252	12	114	162	DTX421130	13.0		.5118	14	133	178
DTX421109	10.9		.4291	12	114	162	DTX421033F	13.097	33/64	.5156	14	133	178
DTX421110	11.0		.4330	12	114	162	DTX421131	13.1		.5157	14	133	178
DTX421111	11.1		.4370	12	114	162	DTX421132	13.2		.5197	14	133	178
DTX421028F	11.113	7/16	.4375	12	114	162	DTX421133	13.3		.5236	14	133	178
DTX421112	11.2		.4409	12	114	162	DTX421134	13.4		.5276	14	133	178
DTX421113	11.3		.4448	12	114	162	DTX421135	13.5		.5314	14	133	178
DTX421114	11.4		.4488	12	114	162	DTX421136	13.6		.5354	14	133	178
DTX421115	11.5		.4527	12	114	162	DTX421137	13.7		.5394	14	133	178
DTX421029F	11.509	29/64	.4531	12	114	162	DTX421138	13.8		.5433	14	133	178
DTX421116	11.6		.4566	12	114	162	DTX421139	13.9		.5472	14	133	178
DTX421117	11.7		.4606	12	114	162	DTX421140	14.0		.5512	14	133	178
DTX421118	11.8		.4645	12	114	162	DTX421141	14.1		.5551	16	152	203
DTX421119	11.9		.4685	12	114	162	DTX421142	14.2		.5591	16	152	203
DTX421030F	11.906	15/32	.4688	12	114	162	DTX421143	14.3		.5630	16	152	203
DTX421120	12.0		.4724	12	114	162	DTX421036F	14.288	9/16	.5625	16	152	203
DTX421121	12.1		.4764	14	133	178	DTX421144	14.4		.5669	16	152	203
DTX421122	12.2		.4803	14	133	178	DTX421145	14.5		.5709	16	152	203
DTX421123	12.3		.4843	14	133	178	DTX421146	14.6		.5748	16	152	203
DTX421031F	12.303	31/64	.4844	14	133	178	DTX421147	14.7		.5787	16	152	203
DTX421124	12.4		.4882	14	133	178	DTX421148	14.8		.5827	16	152	203
DTX421125	12.5		.4921	14	133	178	DTX421149	14.9		.5866	16	152	203
DTX421126	12.6		.4961	14	133	178	DTX421150	15.0		.5905	16	152	203
DTX421032F	12.7	1/2	.5000	14	133	178	DTX421151	15.1		.5945	16	152	203
DTX421128	12.8		.5039	14	133	178	DTX421152	15.2		.5984	16	152	203
DTX421129	12.9		.5079	14	133	178	DTX421153	15.3		.6024	16	152	203

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M						K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34						15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X with COOLANT HOLES

NEW **DTX421** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

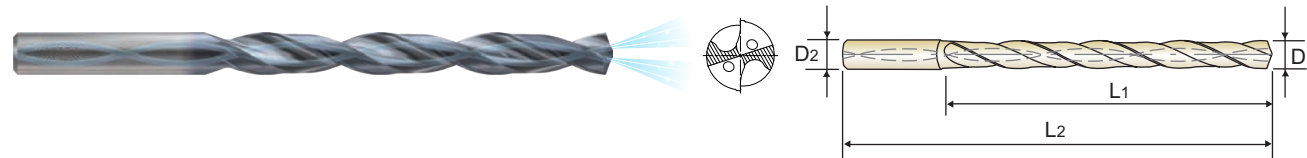

DIN 6537 CARBIDE h6 m7 140° 20 bar RCH Coating p.52

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX421154	15.4		.6063	16	152	203
DTX421155	15.5		.6102	16	152	203
DTX421156	15.6		.6142	16	152	203
DTX421157	15.7		.6181	16	152	203
DTX421158	15.8		.6220	16	152	203
DTX421040F	15.875	5/8	.6250	16	152	203
DTX421159	15.9		.6260	16	152	203
DTX421160	16.0		.6299	16	152	203
DTX421161	16.1		.6339	18	171	222
DTX421162	16.2		.6378	18	171	222
DTX421163	16.3		.6417	18	171	222
DTX421164	16.4		.6457	18	171	222
DTX421165	16.5		.6496	18	171	222
DTX421166	16.6		.6535	18	171	222
DTX421167	16.7		.6575	18	171	222
DTX421168	16.8		.6614	18	171	222
DTX421169	16.9		.6654	18	171	222
DTX421170	17.0		.6693	18	171	222
DTX421171	17.1		.6732	18	171	222
DTX421172	17.2		.6772	18	171	222
DTX421173	17.3		.6811	18	171	222
DTX421174	17.4		.6850	18	171	222
DTX421175	17.5		.6890	18	171	222
DTX421176	17.6		.6929	18	171	222
DTX421177	17.7		.6968	18	171	222

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
DTX421178	17.8		.7008	18	171	222
DTX421179	17.9		.7047	18	171	222
DTX421180	18.0		.7087	18	171	222
DTX421181	18.1		.7126	20	190	243
DTX421182	18.2		.7165	20	190	243
DTX421183	18.3		.7205	20	190	243
DTX421184	18.4		.7244	20	190	243
DTX421185	18.5		.7283	20	190	243
DTX421186	18.6		.7323	20	190	243
DTX421187	18.7		.7362	20	190	243
DTX421188	18.8		.7402	20	190	243
DTX421189	18.9		.7441	20	190	243
DTX421190	19.0		.7480	20	190	243
DTX421048F	19.050	3/4	.7500	20	190	243
DTX421191	19.1		.7520	20	190	243
DTX421192	19.2		.7559	20	190	243
DTX421193	19.3		.7598	20	190	243
DTX421194	19.4		.7638	20	190	243
DTX421195	19.5		.7677	20	190	243
DTX421196	19.6		.7717	20	190	243
DTX421197	19.7		.7756	20	190	243
DTX421198	19.8		.7795	20	190	243
DTX421199	19.9		.7835	20	190	243
DTX421200	20.0		.7874	20	190	243

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	○

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW **DTX414** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

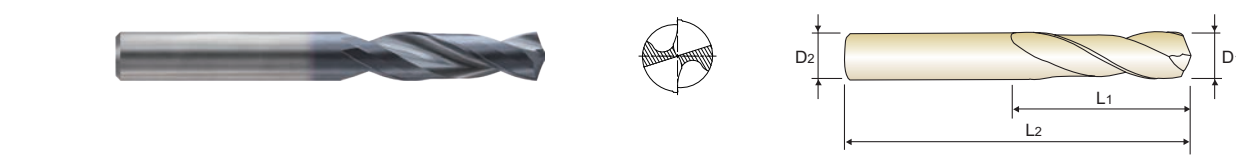

CARBIDE h6 140° RCH Coating p.54

STUB
3 x D

EDP No.	Drill Diameter		Flute Length L1	Overall Length L2
	Fractional	Decimal		
RCH-Coating	D1 = D2		L1	L2
DTX414008	1/8	.1250	45/64	1-59/64
DTX414009	9/64	.1406	25/32	2-3/64
DTX414010	5/32	.1563	7/8	2-3/16
DTX414011	11/64	.1719	15/16	2-9/32
DTX414012	3/16	.1875	1	2-7/16
DTX414013	13/64	.2031	1	2-7/16
DTX414014	7/32	.2188	1-1/8	2-5/8
DTX414015	15/64	.2344	1-1/8	2-5/8
DTX414016	1/4	.2500	1-5/8	3-3/16
DTX414206	F	.2570	1-11/16	3-17/64
DTX414017	17/64	.2656	1-11/16	3-17/64
DTX414209	I	.2720	1-11/16	3-17/64
DTX414018	9/32	.2813	1-3/4	3-7/16
DTX414019	19/64	.2969	1-7/8	3-9/16
DTX414020	5/16	.3125	1-7/8	3-9/16
DTX414021	21/64	.3281	2-1/16	3-3/4
DTX414217	Q	.3320	2-1/16	3-3/4

EDP No.	Drill Diameter		Flute Length L1	Overall Length L2
	Fractional	Decimal		
RCH-Coating	D1 = D2		L1	L2
DTX414022	11/32	.3438	2-3/16	3-7/8
DTX414023	23/64	.3594	2-9/32	4
DTX414221	U	.3680	2-9/32	4
DTX414024	3/8	.3750	2-3/8	4-1/8
DTX414025	25/64	.3906	2-3/8	4-1/8
DTX414026	13/32	.4063	2-5/8	4-13/32
DTX414027	27/64	.4219	2-11/16	4-1/2
DTX414028	7/16	.4375	2-13/16	4-5/8
DTX414029	29/64	.4531	2-7/8	4-3/4
DTX414230	15/32	.4688	2-7/8	4-3/4
DTX414031	31/64	.4844	3	5-5/16
DTX414232	1/2	.5000	3-1/16	5-3/8
DTX414033	33/64	.5156	3-11/32	5-11/16
DTX414034	17/32	.5313	3-11/32	5-11/16
DTX414036	9/16	.5625	3-1/2	5-15/16
DTX414237	37/64	.5781	3-37/64	6
DTX414040	5/8	.6250	3-25/32	6-19/64

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	○

ISO Material Description	N						S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW SERIES
DTX722

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

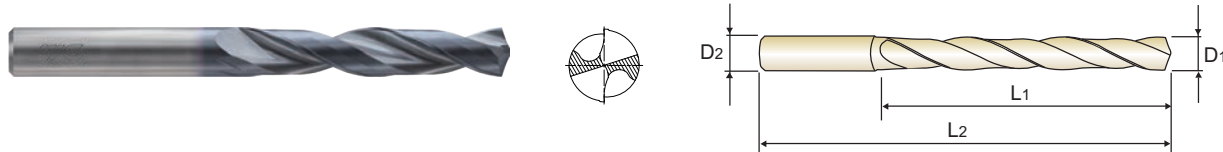

LONG
5 × D

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
RCH-Coating	D1		D2	L1	L2
DTX722013	13/64	.2031	1/4	1-3/4	3-15/16
DTX722014	7/32	.2188	1/4	1-57/64	3-15/16
DTX722015	15/64	.2344	1/4	1-57/64	3-15/16
DTX722016	1/4	.2500	1/4	2-3/64	4-19/64
DTX722026	F	.2570	5/16	2-13/64	4-19/64
DTX722017	17/64	.2656	5/16	2-13/64	4-19/64
DTX722209	I	.2720	5/16	2-13/64	4-19/64
DTX722018	9/32	.2812	5/16	2-23/64	4-41/64
DTX722019	19/64	.2969	5/16	2-33/64	4-41/64
DTX722020	5/16	.3125	5/16	2-33/64	4-41/64
DTX722021	21/64	.3281	3/8	2-43/64	5
DTX722217	Q	.3320	3/8	2-43/64	5

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
RCH-Coating	D1		D2	L1	L2
DTX722022	11/32	.3438	3/8	2-27/32	5
DTX722023	23/64	.3594	3/8	3	5-23/64
DTX722221	U	.3680	3/8	3	5-23/64
DTX722024	3/8	.3750	3/8	3-5/32	5-23/64
DTX722025	25/64	.3906	7/16	3-5/32	5-23/64
DTX722026	13/32	.4062	7/16	3-5/16	5-7/8
DTX722027	27/64	.4219	7/16	3-15/32	5-7/8
DTX722028	7/16	.4375	7/16	3-5/8	6-7/32
DTX722029	29/64	.4531	1/2	3-25/32	6-7/32
DTX722030	15/32	.4688	1/2	3-25/32	6-7/32
DTX722031	31/64	.4844	1/2	3-15/16	6-37/64
DTX722032	1/2	.5000	1/2	4-3/32	6-37/64

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34								55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○	○	○	○

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW SERIES
DTX404

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

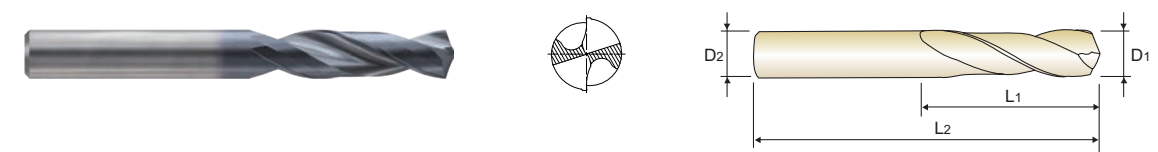

STUB
3 × D

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
RCH-Coating	D1 = D2		L1	L2
DTX404030	3.0	.1181	16	46
DTX404031	3.1	.1220	18	49
DTX404032	3.2	.1260	18	49
DTX404033	3.3	.1299	18	49
DTX404034	3.4	.1339	20	52
DTX404035	3.5	.1378	20	52
DTX404036	3.6	.1417	20	52
DTX404037	3.7	.1457	20	52
DTX404038	3.8	.1496	22	55
DTX404039	3.9	.1535	22	55
DTX404040	4.0	.1575	22	55
DTX404041	4.1	.1614	22	55
DTX404042	4.2	.1654	22	55
DTX404043	4.3	.1693	24	58
DTX404044	4.4	.1732	24	58
DTX404045	4.5	.1772	24	58
DTX404046	4.6	.1811	24	58
DTX404047	4.7	.1850	24	58
DTX404048	4.8	.1890	26	62
DTX404049	4.9	.1929	26	62
DTX404050	5.0	.1969	26	62
DTX404051	5.1	.2008	26	62
DTX404052	5.2	.2047	26	62
DTX404053	5.3	.2087	26	62
DTX404054	5.4	.2126	28	66
DTX404055	5.5	.2165	28	66

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
RCH-Coating	D1 = D2		L1	L2
DTX404056	5.6	.2205	28	66
DTX404057	5.7	.2244	28	66
DTX404058	5.8	.2283	28	66
DTX404059	5.9	.2323	28	66
DTX404060	6.0	.2362	28	66
DTX404061	6.1	.2402	31	70
DTX404062	6.2	.2441	31	70
DTX404063	6.3	.2480	31	70
DTX404064	6.4	.2520	31	70
DTX404065	6.5	.2559	31	70
DTX404066	6.6	.2598	31	70
DTX404067	6.7	.2638	31	70
DTX404068	6.8	.2677	34	74
DTX404069	6.9	.2717	34	74
DTX404070	7.0	.2756	34	74
DTX404071	7.1	.2795	34	74
DTX404072	7.2	.2835	34	74
DTX404073	7.3	.2874	34	74
DTX404074	7.4	.2913	34	74
DTX404075	7.5	.2953	34	74
DTX404076	7.6	.2992	37	79
DTX404077	7.7	.3031	37	79
DTX404078	7.8	.3071	37	79
DTX404079	7.9	.3110	37	79
DTX404080	8.0	.3150	37	79
DTX404081	8.1	.3189	37	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34								55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○	○	○	○

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

SERIES
NEW DTX404

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

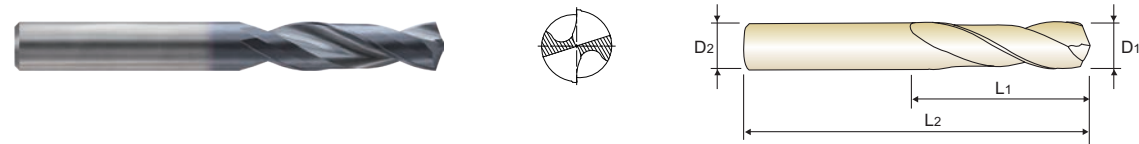

DIN 6539 CARBIDE h6 m7 140° RCH Coating p.54

STUB
3 x D

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
RCH-Coating	D1 = D2		L1	L2
DTX404082	8.2	.3228	37	79
DTX404083	8.3	.3268	37	79
DTX404084	8.4	.3307	37	79
DTX404085	8.5	.3346	37	79
DTX404086	8.6	.3386	40	84
DTX404087	8.7	.3425	40	84
DTX404088	8.8	.3465	40	84
DTX404089	8.9	.3504	40	84
DTX404090	9.0	.3543	40	84
DTX404091	9.1	.3583	40	84
DTX404092	9.2	.3622	40	84
DTX404093	9.3	.3661	40	84
DTX404094	9.4	.3701	40	84
DTX404095	9.5	.3740	40	84
DTX404096	9.6	.3780	43	89
DTX404097	9.7	.3819	43	89
DTX404098	9.8	.3858	43	89
DTX404099	9.9	.3898	43	89
DTX404100	10.0	.3937	43	89
DTX404102	10.2	.4016	43	89

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
RCH-Coating	D1 = D2		L1	L2
DTX404105	10.5	.4134	43	89
DTX404110	11.0	.4331	47	95
DTX404115	11.5	.4528	47	95
DTX404120	12.0	.4724	51	102
DTX404130	13.0	.5118	51	102
DTX404135	13.5	.5314	54	107
DTX404140	14.0	.5512	54	107
DTX404145	14.5	.5708	56	111
DTX404150	15.0	.5905	56	111
DTX404155	15.5	.6102	58	115
DTX404160	16.0	.6299	58	115
DTX404165	16.5	.6495	60	119
DTX404170	17.0	.6692	60	119
DTX404175	17.5	.6889	62	123
DTX404180	18.0	.7087	62	123
DTX404185	18.5	.7283	64	127
DTX404190	19.0	.7480	64	127
DTX404195	19.5	.7676	66	131
DTX404200	20.0	.7874	66	131

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	42	15	35	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

SERIES
NEW DTX423

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° RCH Coating p.54

SHORT
3 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX423030	3.0		.1181	6	20	62
DTX423031	3.1		.1220	6	20	62
DTX423008F	3.175	1/8	.1250	6	20	62
DTX423032	3.2		.1260	6	20	62
DTX423033	3.3		.1299	6	20	62
DTX423034	3.4		.1339	6	20	62
DTX423035	3.5		.1378	6	20	62
DTX423009F	3.572	9/64	.1406	6	20	62
DTX423036	3.6		.1417	6	20	62
DTX423037	3.7		.1457	6	20	62
DTX423038	3.8		.1496	6	24	66
DTX423039	3.9		.1535	6	24	66
DTX423010F	3.969	5/32	.1563	6	24	66
DTX423040	4.0		.1575	6	24	66
DTX423041	4.1		.1614	6	24	66
DTX423042	4.2		.1654	6	24	66
DTX423043	4.3		.1693	6	24	66
DTX423011F	4.366	11/64	.1719	6	24	66
DTX423044	4.4		.1732	6	24	66
DTX423045	4.5		.1772	6	24	66
DTX423046	4.6		.1811	6	24	66
DTX423047	4.7		.1850	6	24	66
DTX423012F	4.763	3/16	.1875	6	24	66
DTX423048	4.8		.1890	6	28	66
DTX423049	4.9		.1929	6	28	66
DTX423050	5.0		.1969	6	28	66

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX423051	5.1		.2008	6	28	66
DTX423013F	5.159	13/64	.2031	6	28	66
DTX423052	5.2		.2047	6	28	66
DTX423053	5.3		.2087	6	28	66
DTX423054	5.4		.2126	6	28	66
DTX423055	5.5		.2165	6	28	66
DTX423014F	5.556	7/32	.2188	6	28	66
DTX423056	5.6		.2205	6	28	66
DTX423057	5.7		.2244	6	28	66
DTX423058	5.8		.2283	6	28	66
DTX423059	5.9		.2323	6	28	66
DTX423015F	5.953	15/64	.2344	6	28	66
DTX423060	6.0		.2362	6	28	66
DTX423061	6.1		.2402	8	34	79
DTX423062	6.2		.2441	8	34	79
DTX423063	6.3		.2480	8	34	79
DTX423016F	6.350	1/4	.2500	8	34	79
DTX423064	6.4		.2520	8	34	79
DTX423065	6.5		.2559	8	34	79
DTX423006L	6.528	F	.2570	8	34	79
DTX423066	6.6		.2598	8	34	79
DTX423067	6.7		.2638	8	34	79
DTX423017F	6.747	17/64	.2656	8	34	79
DTX423068	6.8		.2677	8	34	79
DTX423069	6.9		.2717	8	34	79
DTX423009L	6.909	I	.2720	8	34	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	42	15	35	23	10	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW SERIES
DTX423

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° RCH Coating

SHORT
3 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX423157	15.7		.6181	16	65	115	DTX423179	17.9		.7047	18	73	123
DTX423158	15.8		.6220	16	65	115	DTX423180	18.0		.7087	18	73	123
DTX423040F	15.875	5/8	.6250	16	65	115	DTX423181	18.1		.7126	20	79	131
DTX423159	15.9		.6260	16	65	115	DTX423182	18.2		.7165	20	79	131
DTX423160	16.0		.6299	16	65	115	DTX423183	18.3		.7205	20	79	131
DTX423161	16.1		.6339	18	73	123	DTX423184	18.4		.7244	20	79	131
DTX423162	16.2		.6378	18	73	123	DTX423185	18.5		.7283	20	79	131
DTX423163	16.3		.6417	18	73	123	DTX423186	18.6		.7323	20	79	131
DTX423164	16.4		.6457	18	73	123	DTX423187	18.7		.7362	20	79	131
DTX423165	16.5		.6495	18	73	123	DTX423188	18.8		.7402	20	79	131
DTX423166	16.6		.6535	18	73	123	DTX423189	18.9		.7441	20	79	131
DTX423167	16.7		.6575	18	73	123	DTX423190	19.0		.7480	20	79	131
DTX423168	16.8		.6614	18	73	123	DTX423048F	19.050	3/4	.7500	20	79	131
DTX423169	16.9		.6654	18	73	123	DTX423191	19.1		.7520	20	79	131
DTX423170	17.0		.6692	18	73	123	DTX423192	19.2		.7559	20	79	131
DTX423171	17.1		.6732	18	73	123	DTX423193	19.3		.7598	20	79	131
DTX423172	17.2		.6772	18	73	123	DTX423194	19.4		.7638	20	79	131
DTX423173	17.3		.6811	18	73	123	DTX423195	19.5		.7676	20	79	131
DTX423174	17.4		.6850	18	73	123	DTX423196	19.6		.7717	20	79	131
DTX423044F	17.463	11/16	.6875	18	73	123	DTX423197	19.7		.7756	20	79	131
DTX423175	17.5		.6889	18	73	123	DTX423198	19.8		.7795	20	79	131
DTX423176	17.6		.6929	18	73	123	DTX423199	19.9		.7835	20	79	131
DTX423177	17.7		.6968	18	73	123	DTX423200	20.0		.7874	20	79	131
DTX423178	17.8		.7008	18	73	123							

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW SERIES
DTX424

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

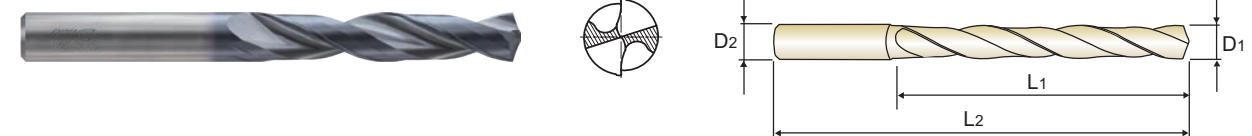

DIN 6537 CARBIDE h6 m7 140° RCH Coating

LONG
5 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2	RCH-Coating	D1			D2	L1	L2
DTX424010	1.0		.0394	3	8	55	DTX424008F	3.175	1/8	.1250	6	28	66
DTX424011	1.1		.0433	3	12	55	DTX424032	3.2		.1260	6	28	66
DTX424012	1.2		.0472	3	12	55	DTX424033	3.3		.1299	6	28	66
DTX424013	1.3		.0512	3	12	55	DTX424034	3.4		.1339	6	28	66
DTX424014	1.4		.0551	3	12	55	DTX424035	3.5		.1378	6	28	66
DTX424015	1.5		.0591	3	16	55	DTX424009F	3.572	9/64	.1406	6	28	66
DTX424004F	1.588	1/16	.0625	3	16	55	DTX424036	3.6		.1417	6	28	66
DTX424016	1.6		.0630	3	16	55	DTX424037	3.7		.1457	6	28	66
DTX424017	1.7		.0669	3	16	55	DTX424038	3.8		.1496	6	36	74
DTX424018	1.8		.0709	3	16	55	DTX424039	3.9		.1535	6	36	74
DTX424019	1.9		.0748	3	16	55	DTX424010F	3.969	5/32	.1563	6	36	74
DTX424005F	1.984	5/64	.0781	3	16	55	DTX424040	4.0		.1575	6	36	74
DTX424020	2.0		.0787	4	21	57	DTX424041	4.1		.1614	6	36	74
DTX424021	2.1		.0827	4	21	57	DTX424042	4.2		.1654	6	36	74
DTX424022	2.2		.0866	4	21	57	DTX424043	4.3		.1693	6	36	74
DTX424023	2.3		.0906	4	21	57	DTX424011F	4.366	11/64	.1719	6	36	74
DTX424006F	2.381	3/32	.0938	4	21	57	DTX424044	4.4		.1732	6	36	74
DTX424024	2.4		.0945	4	21	57	DTX424045	4.5		.1772	6	36	74
DTX424025	2.5		.0984	4	21	57	DTX424046	4.6		.1811	6	36	74
DTX424026	2.6		.1024	4	21	57	DTX424047	4.7		.1850	6	36	74
DTX424027	2.7		.1063	4	21	57	DTX424012F	4.763	3/16	.1875	6	36	74
DTX424007F	2.778	7/64	.1094	4	21	57	DTX424048	4.8		.1890	6	44	82
DTX424028	2.8		.1102	4	21	57	DTX424049	4.9		.1929	6	44	82
DTX424029	2.9		.1142	4	21	57	DTX424050	5.0		.1969	6	44	82
DTX424030	3.0		.1181	6	28	66	DTX424051	5.1		.2008	6	44	82
DTX424031	3.1		.1220	6	28	66	DTX424013F	5.159	13/64	.2031	6	44	82

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M					K					
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended											◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW **DTX424** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

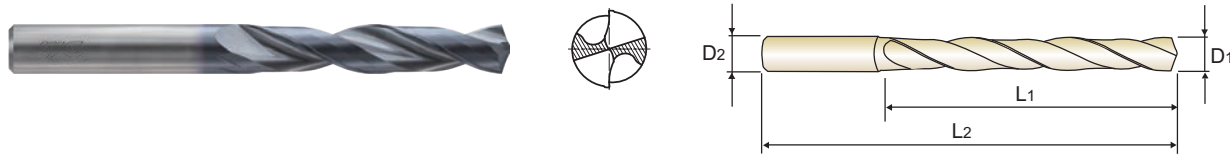

DIN 6537 CARBIDE h6 m7 140° RCH Coating

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424052	5.2		.2047	6	44	82
DTX424053	5.3		.2087	6	44	82
DTX424054	5.4		.2126	6	44	82
DTX424055	5.5		.2165	6	44	82
DTX424014F	5.556	7/32	.2188	6	44	82
DTX424056	5.6		.2205	6	44	82
DTX424057	5.7		.2244	6	44	82
DTX424058	5.8		.2283	6	44	82
DTX424059	5.9		.2323	6	44	82
DTX424015F	5.953	15/64	.2344	6	44	82
DTX424060	6.0		.2362	6	44	82
DTX424061	6.1		.2402	8	53	91
DTX424062	6.2		.2441	8	53	91
DTX424063	6.3		.2480	8	53	91
DTX424016F	6.350	1/4	.2500	8	53	91
DTX424064	6.4		.2520	8	53	91
DTX424065	6.5		.2559	8	53	91
DTX424006L	6.528	F	.2570	8	53	91
DTX424066	6.6		.2598	8	53	91
DTX424067	6.7		.2638	8	53	91
DTX424017F	6.747	17/64	.2656	8	53	91
DTX424068	6.8		.2677	8	53	91
DTX424069	6.9		.2717	8	53	91
DTX424009L	6.909	I	.2720	8	53	91
DTX424070	7.0		.2756	8	53	91
DTX424071	7.1		.2795	8	53	91

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424018F	7.144	9/32	.2812	8	53	91
DTX424072	7.2		.2835	8	53	91
DTX424073	7.3		.2874	8	53	91
DTX424074	7.4		.2913	8	53	91
DTX424075	7.5		.2953	8	53	91
DTX424019F	7.541	19/64	.2969	8	53	91
DTX424076	7.6		.2992	8	53	91
DTX424077	7.7		.3031	8	53	91
DTX424078	7.8		.3071	8	53	91
DTX424079	7.9		.3110	8	53	91
DTX424020F	7.938	5/16	.3125	8	53	91
DTX424080	8.0		.3150	8	53	91
DTX424081	8.1		.3189	10	61	103
DTX424082	8.2		.3228	10	61	103
DTX424083	8.3		.3268	10	61	103
DTX424021F	8.334	21/64	.3281	10	61	103
DTX424084	8.4		.3307	10	61	103
DTX424017L	8.433	Q	.3320	10	61	103
DTX424085	8.5		.3346	10	61	103
DTX424086	8.6		.3386	10	61	103
DTX424087	8.7		.3425	10	61	103
DTX424022F	8.731	11/32	.3438	10	61	103
DTX424088	8.8		.3465	10	61	103
DTX424089	8.9		.3504	10	61	103
DTX424090	9.0		.3543	10	61	103
DTX424091	9.1		.3583	10	61	103

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW **DTX424** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

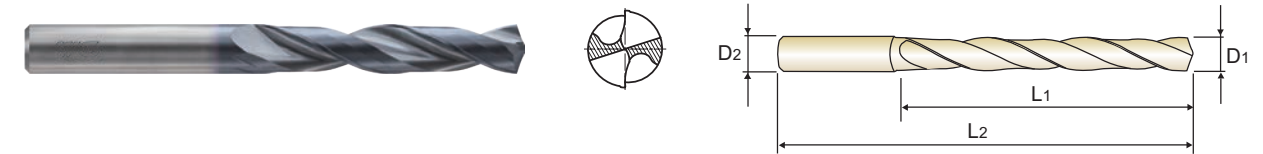

DIN 6537 CARBIDE h6 m7 140° RCH Coating

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424023F	9.128	23/64	.3594	10	61	103
DTX424092	9.2		.3622	10	61	103
DTX424093	9.3		.3661	10	61	103
DTX424021L	9.347	U	.3680	10	61	103
DTX424094	9.4		.3701	10	61	103
DTX424095	9.5		.3740	10	61	103
DTX424024F	9.525	3/8	.3750	10	61	103
DTX424096	9.6		.3780	10	61	103
DTX424097	9.7		.3819	10	61	103
DTX424098	9.8		.3858	10	61	103
DTX424099	9.9		.3898	10	61	103
DTX424025F	9.922	25/64	.3906	10	61	103
DTX424100	10.0		.3937	10	61	103
DTX424101	10.1		.3976	12	71	118
DTX424102	10.2		.4016	12	71	118
DTX424103	10.3		.4055	12	71	118
DTX424026F	10.319	13/32	.4062	12	71	118
DTX424104	10.4		.4094	12	71	118
DTX424105	10.5		.4134	12	71	118
DTX424106	10.6		.4173	12	71	118
DTX424107	10.7		.4213	12	71	118
DTX424027F	10.716	27/64	.4219	12	71	118
DTX424108	10.8		.4252	12	71	118
DTX424109	10.9		.4291	12	71	118
DTX424110	11.0		.4331	12	71	118
DTX424111	11.1		.4370	12	71	118

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424028F	11.113	7/16	.4375	12	71	118
DTX424112	11.2		.4409	12	71	118
DTX424113	11.3		.4449	12	71	118
DTX424114	11.4		.4488	12	71	118
DTX424115	11.5		.4528	12	71	118
DTX424029F	11.509	29/64	.4531	12	71	118
DTX424116	11.6		.4567	12	71	118
DTX424117	11.7		.4606	12	71	118
DTX424118	11.8		.4646	12	71	118
DTX424119	11.9		.4685	12	71	118
DTX424030F	11.906	15/32	.4688	12	71	118
DTX424120	12.0		.4724	12	71	118
DTX424121	12.1		.4764	14	77	124
DTX424122	12.2		.4803	14	77	124
DTX424123	12.3		.4843	14	77	124
DTX424031F	12.303	31/64	.4844	14	77	124
DTX424124	12.4		.4882	14	77	124
DTX424125	12.5		.4921	14	77	124
DTX424126	12.6		.4961	14	77	124
DTX424032F	12.7	1/2	.5000	14	77	124
DTX424128	12.8		.5039	14	77	124
DTX424129	12.9		.5079	14	77	124
DTX424130	13.0		.5118	14	77	124
DTX424131	13.1		.5157	14	77	124
DTX424132	13.2		.5197	14	77	124
DTX424133	13.3		.5236	14	77	124

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW **DTX424** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation



DIN 6537 CARBIDE h6 m7 140° RCH Coating

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424134	13.4		.5276	14	77	124
DTX424135	13.5		.5315	14	77	124
DTX424136	13.6		.5354	14	77	124
DTX424137	13.7		.5394	14	77	124
DTX424138	13.8		.5433	14	77	124
DTX424139	13.9		.5472	14	77	124
DTX424140	14.0		.5512	14	77	124
DTX424141	14.1		.5551	16	83	133
DTX424142	14.2		.5591	16	83	133
DTX424036F	14.288	9/16	.5625	16	83	133
DTX424143	14.3		.5630	16	83	133
DTX424144	14.4		.5669	16	83	133
DTX424145	14.5		.5708	16	83	133
DTX424146	14.6		.5748	16	83	133
DTX424147	14.7		.5787	16	83	133
DTX424148	14.8		.5827	16	83	133
DTX424149	14.9		.5866	16	83	133
DTX424150	15.0		.5905	16	83	133
DTX424151	15.1		.5945	16	83	133
DTX424152	15.2		.5984	16	83	133
DTX424153	15.3		.6024	16	83	133
DTX424154	15.4		.6063	16	83	133
DTX424155	15.5		.6102	16	83	133
DTX424156	15.6		.6142	16	83	133
DTX424157	15.7		.6181	16	83	133
DTX424158	15.8		.6220	16	83	133

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424040F	15.875	5/8	.6250	16	83	133
DTX424159	15.9		.6260	16	83	133
DTX424160	16.0		.6299	16	83	133
DTX424161	16.1		.6339	18	93	143
DTX424162	16.2		.6378	18	93	143
DTX424163	16.3		.6417	18	93	143
DTX424164	16.4		.6457	18	93	143
DTX424165	16.5		.6495	18	93	143
DTX424166	16.6		.6535	18	93	143
DTX424167	16.7		.6575	18	93	143
DTX424168	16.8		.6614	18	93	143
DTX424169	16.9		.6654	18	93	143
DTX424170	17.0		.6692	18	93	143
DTX424171	17.1		.6732	18	93	143
DTX424172	17.2		.6772	18	93	143
DTX424173	17.3		.6811	18	93	143
DTX424174	17.4		.6850	18	93	143
DTX424175	17.5		.6889	18	93	143
DTX424176	17.6		.6929	18	93	143
DTX424177	17.7		.6968	18	93	143
DTX424178	17.8		.7008	18	93	143
DTX424179	17.9		.7047	18	93	143
DTX424180	18.0		.7087	18	93	143
DTX424181	18.1		.7126	20	101	153
DTX424182	18.2		.7165	20	101	153
DTX424183	18.3		.7205	20	101	153

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	○	◎	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

RCH-COATED SOLID CARBIDE
DREAM DRILL X without COOLANT HOLES

NEW **DTX424** SERIES

- ▶ Upgraded coating for higher Tool Life in various materials
- ▶ Soft cutting action and reduced axial forces; Easy to Recondition
- ▶ Good self-centering even at low feed rates and unstable situations
- ▶ Excellent Chip breaking and chip evacuation

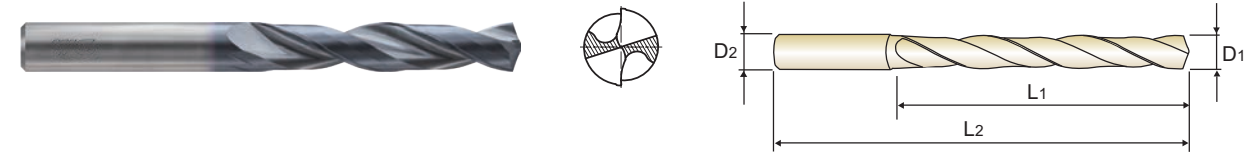

DIN 6537 CARBIDE h6 m7 140° RCH Coating

LONG 5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424184	18.4		.7244	20	101	153
DTX424185	18.5		.7283	20	101	153
DTX424186	18.6		.7323	20	101	153
DTX424187	18.7		.7362	20	101	153
DTX424188	18.8		.7402	20	101	153
DTX424189	18.9		.7441	20	101	153
DTX424190	19.0		.7480	20	101	153
DTX424048F	19.005	3/4	.7500	20	101	153
DTX424191	19.1		.7520	20	101	153

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
RCH-Coating	D1			D2	L1	L2
DTX424192	19.2		.7599	20	101	153
DTX424193	19.3		.7598	20	101	153
DTX424194	19.4		.7638	20	101	153
DTX424195	19.5		.7676	20	101	153
DTX424196	19.6		.7717	20	101	153
DTX424197	19.7		.7756	20	101	153
DTX424198	19.8		.7795	20	101	153
DTX424199	19.9		.7835	20	101	153
DTX424200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	○	◎	○

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

DTX416, DTX418, DTX711

DTX712, DTX406, DTX408, DTX421 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter									
			1.0 ~ 2.9		3.0 ~ 20.0		3.0		4.0		5.0		6.0			
			METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL		
			.0394 ~.0787	DECIMAL	.0394	.0787	.1181 ~.7874	DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500	
P	2	Non-alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
	3	Non-alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
	4	Non-alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
			230	RPM	22280	11140	296	RPM	9550	7160	5730	4770				
	5	Non-alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
FEED			.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
6	Low alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
		230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
7	Low alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0039 - .0079	.0047 - .0094							
		230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
8	Low alloy steel	230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
		132	RPM	12730	6370	165	RPM	5310	3980	3180	2650					
9	Low alloy steel	FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.0020 - .0043	.0031 - .0055	.0039 - .0063							
		198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
10	High alloyed steel, and tool steel	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
		132	RPM	12730	6370	148	RPM	4770	3580	2860	2390					
11	High alloyed steel, and tool steel	FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.0020 - .0043	.0031 - .0055	.0039 - .0063							
		198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
M	Stainless steel	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
13	Stainless steel	148	RPM	14320	7160	181	RPM	5840	4380	3500	2920					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
K	15	Grey cast iron	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
	16	Grey cast iron	247	RPM	23870	11940	313	RPM	10080	7560	6050	5040				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
	17	Nodular cast iron	296	RPM	28650	14320	395	RPM	12730	9550	7640	6370				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
18	Nodular cast iron	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
19	Malleable cast iron	230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102							
20	Malleable cast iron	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
H	38	Hardened steel	82	RPM	7960	3980	98	RPM	3180	2390	1910	1590				
			FEED	.0004 - .0008	.0004 - .0012	FEED	.0004 - .0012	.0004 - .0016	.0008 - .0020	.0012 - .0024						

▶ NEXT PAGE

▶ Recommend to reduce the feed rate as following

Feed 100% : DTX416/DTX711(3xD), DTX406(3xD)

Feed 80% : DTX418/DTX712(5xD), DTX408(5xD) Feed 70% : DTX421(8xD)

DTX416, DTX418, DTX711

DTX712, DTX406, DTX408, DTX421 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter																			
			3.0 ~ 20.0		3.0		4.0		5.0		6.0		8.0		10.0		12.0		14.0		16.0		18.0		20.0	
			METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL	METRIC	FRACTIONAL
			.1181 ~.7874	DECIMAL	.3125	.3150	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874									
P	2	Non-alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750													
			FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157														
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750													
	3	Non-alloy steel	FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157														
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750													
			FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126														
	4	Non-alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750													
			FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126														
			296	RPM	3580	2860	2390	2260	2050	1790	1510	1430														
	5	Non-alloy steel	FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126														
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750													
FEED			.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157															
6	Low alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750														
		FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157															
		296	RPM	3580	2860	2390	2260	2050	1790	1510	1430															
7	Low alloy steel	FEED	.0063 - .0110	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157															
		296	RPM	3580	2860	2390	2260	2050	1790	1510	1430															
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0																		

DTX414, DTX722, DTX404, DTX423, DTX424 SERIES

without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter										
			1.0 ~ 2.9	METRIC	1.0	2.0	3.0 ~ 20.0	METRIC	3.0	-	4.0	-	5.0	6.0	-		
			-.0394 ~.0787	FRACTIONAL	-	-	1/8 ~ 3/4	FRACTIONAL	-	1/8	-	3/16	-	-	1/4		
			.0394 ~.0787	DECIMAL	.0394	.0787	.1181 ~.7874	DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500		
P	2	Non-alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
			230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
			230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071
			197	RPM	19100	9550	263	RPM	8490	6370	5090	4240	FEED	.0012-.0020	.0020-.0028	.0039-.0063	.0047-.0071
	6	Low alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
			197	RPM	19100	9550	263	RPM	8490	6370	5090	4240	FEED	.0024-.0047	.0031-.0055	.0039-.0079	.0047-.0094
			197	RPM	19100	9550	263	RPM	8490	6370	5090	4240	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071
			99	RPM	9550	4770	132	RPM	4240	3180	2550	2120	FEED	.0012-.0031	.0020-.0043	.0031-.0055	.0039-.0063
	10	High alloyed steel, and tool steel	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071
			99	RPM	9550	4770	132	RPM	4240	3180	2550	2120	FEED	.0012-.0031	.002-.0043	.0031-.0055	.0039-.0063
	M	12	Stainless steel	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710	FEED	.0024-.0047	.0031-.0055	.0055-.0079
115				RPM	11140	5570	148	RPM	4770	3580	2860	2390	FEED	.0016-.0039	.0028-.0051	.0039-.0063	.0047-.0071
K	15	Grey cast iron	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102
			214	RPM	20690	10350	263	RPM	8490	6370	5090	4240	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
	17	Nodular cast iron	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102
			165	RPM	15920	7960	230	RPM	7430	5570	4460	3710	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
	19	Malleable cast iron	197	RPM	19100	9550	263	RPM	8490	6370	5090	4240	FEED	.0031-.0055	.0047-.0071	.0059-.0087	.0079-.0102
			165	RPM	15920	7960	230	RPM	7430	5570	4460	3710	FEED	.0024-.0047	.0031-.0055	.0055-.0079	.0063-.0087
H	38	Hardened steel	65	RPM	6370	3180	82	RPM	2650	1990	1590	1330	FEED	.0004-.0008	.0004-.0016	.0008-.0020	.0012-.0024

▶ NEXT PAGE

▶ Recommend to reduce the feed rate as following

Feed 100% : DTX414(3xD), DTX404(3xD), DTX423(3xD) Feed 80% : DTX722(5xD), DTX424(5xD)

DTX414, DTX722, DTX404, DTX423, DTX424 SERIES

without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter																
			3.0 ~ 20.0	METRIC	-	8.0	-	10.0	12.0	-	14.0	-	16.0	18.0	-	20.0							
			1/8 ~ 3/4	FRACTIONAL	5/16	-	3/8	-	-	1/2	-	9/16	5/8	-	-	3/4	-						
			.1181 ~.7874	DECIMAL	.3125	.3150	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874						
P	2	Non-alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
			362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
			362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0055-.0079	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126
			296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270	FEED	.0055-.0079	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126
	6	Low alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
			296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270	FEED	.0063-.011	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
			296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270	FEED	.0055-.0079	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126
			165	RPM	1590	1270	1060	1010	910	800	710	670	640	FEED	.0047-.0071	.0051-.0075	.0055-.0079	.0055-.0079	.0059-.0083	.0063-.0087	.0067-.0098	.0067-.0098	.0071-.0110
	10	High alloyed steel, and tool steel	263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110	FEED	.0055-.0079	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126
			148	RPM	1590	1270	1060	1010	910	800	710	670	640	FEED	.0047-.0071	.0051-.0075	.0055-.0079	.0055-.0079	.0059-.0083	.0063-.0087	.0067-.0098	.0067-.0098	.0071-.0110
	M	12	Stainless steel	263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150
181				RPM	1790	1430	1190	1130	1020	900	800	750	720	FEED	.0055-.0079	.0059-.0091	.0067-.0098	.0067-.0098	.0071-.0102	.0075-.0106	.0079-.0118	.0079-.0118	.0087-.0126
K	15	Grey cast iron	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0087-.0110	.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173
			313	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
	17	Nodular cast iron	395	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590	FEED	.0087-.0110	.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173
			263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
	19	Malleable cast iron	296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270	FEED	.0087-.0110	.0098-.0130	.0106-.0138	.0106-.0138	.0114-.0146	.0122-.0154	.0126-.0165	.0126-.0165	.0134-.0173
			263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110	FEED	.0071-.0094	.0075-.0106	.0083-.0114	.0083-.0114	.0091-.0122	.0098-.0130	.0110-.0150	.0110-.0150	.0118-.0157
H	38	Hardened steel	98	RPM	990	800	660	620	570	500	440	400	FEED	.0012-.0024	.0016-.0028	.0016-.0031	.0016-.0031	.0020-.0035	.0020-.0035	.0020-.0039	.0020-.0039	.0020-.0039	

▶ Recommend to reduce the feed rate as following


Feed 100% : DTX414(3xD), DTX404(3xD), DTX423(3xD) Feed 80% : DTX722(5xD), DTX424(5xD)



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



DREAM DRILLS

SOLID CARBIDE


DREAM DRILLS - GENERAL

- For General Purpose (up to HRc50)


DREAM DRILLS GENERAL




Micro-grained carbide for wear resistance and longer tool life




140 Degree Point Angle
for good centering and low thrust



Wave Shape Cutting Edge
will allow low thrust, stable torque and long tool life



Radius Thinning (R-Thinning)
for Self Centering and Chip Breaking



Optimized flute shape
for strength of drill and smooth chip evacuation




Negative land on the cutting edge
for Reliable Tool Life

Negative Land (Honing)

TiAlN Coating (Upgraded Titanium Aluminum Nitride : Nano-Layer Coating)

- Higher wear resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality

Special surface treatment after coating
to reduce friction and better chip flow.


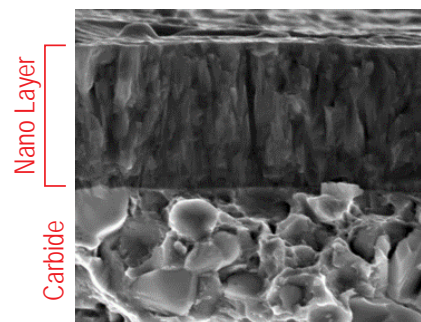


CASE STUDY

► SOLID CARBIDE DREAM DRILLS - General with Coolant Holes


Cutting Condition

Tool	DH408015
Size	Ø1.5 × Ø3 × 15 × 55
Work Material	- AISI : H13 - DIN : X40GrMoV51 - JIS : SKD61 - WR : 1.2344 (HRc30)
RPM	14,856 rev./min.
Feed	.0019 inch/rev.
Drilling Depth	.29" (5xD)
Coolant	Wet Cut

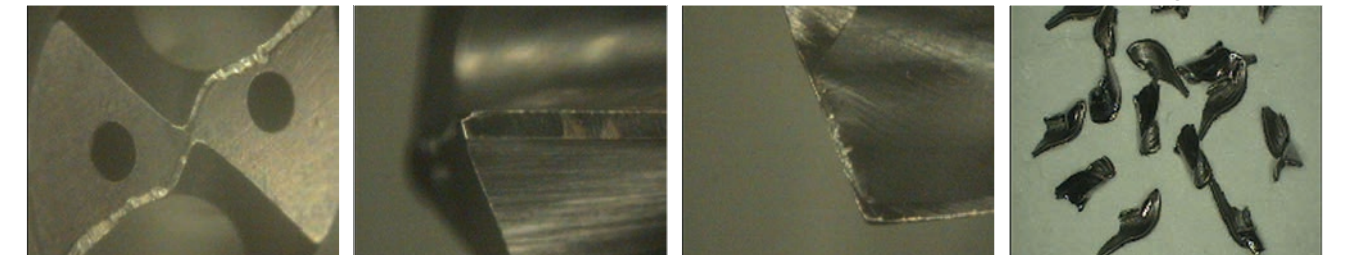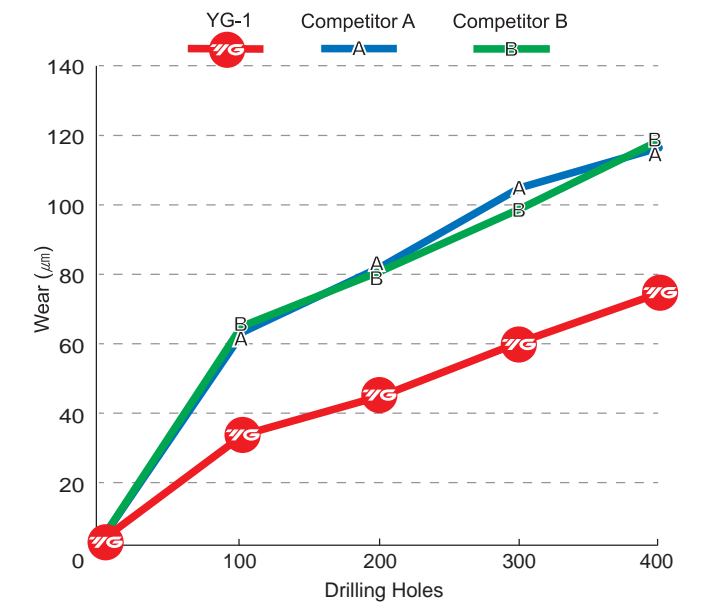


Total Drilling 400 Holes

Competitor A

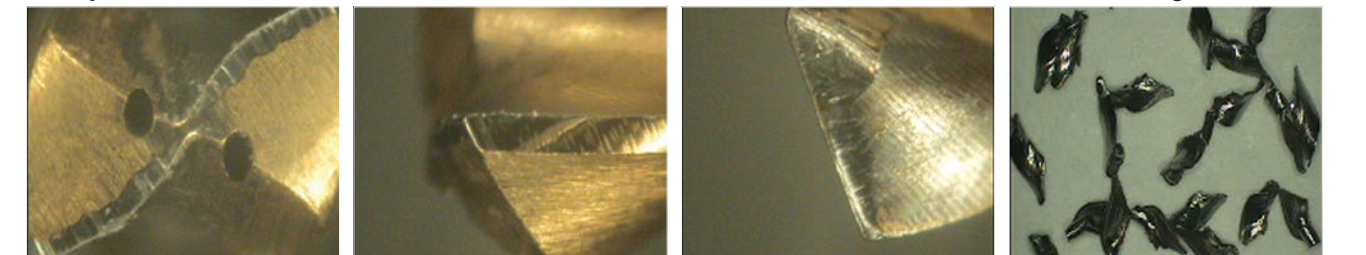

Total Drilling 400 Holes

Competitor B

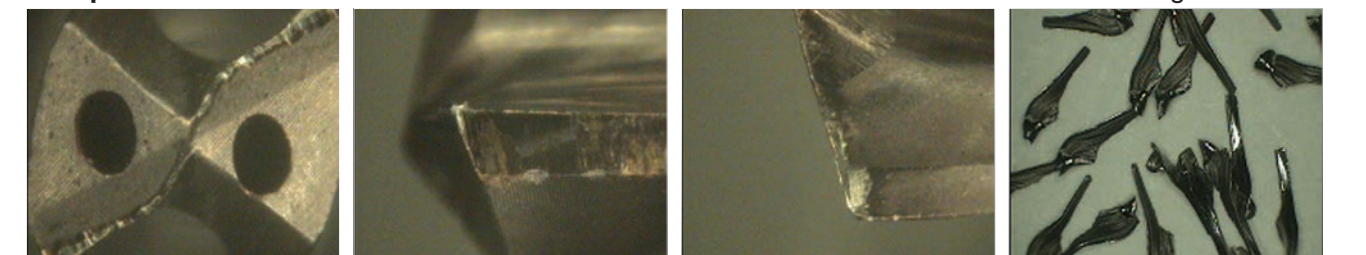

Total Drilling 400 Holes

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES
DH416
DH711

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT
3 x D

DH416 *1BTF Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
TiAIN	D1		D2	L1	L2	TiAIN	D1		D2	L1	L2
DH711008	1/8	.1250	3/16	1.102	2.992	DH711217	Q	.3320	3/8	1.673	3.937
0081BTE	1/8	.1250	15/64	1.102	2.992	0221BTE	11/32	.3438	11/32	1.772	3.937
DH711011	11/64	.1719	3/16	1.417	3.386	DH711022	11/32	.3438	3/8	1.772	3.937
0111BTE	11/64	.1719	15/64	1.417	3.386	DH711023	23/64	.3594	3/8	1.870	4.174
DH711012	3/16	.1875	3/16	1.575	3.543	0231BTE	23/64	.3594	25/64	1.870	4.174
0121BTE	3/16	.1875	15/64	1.575	3.543	DH711221	U	.3680	3/8	1.870	4.174
0131BTE	13/64	.2031	15/64	1.082	3.228	2211BTE	U	.3680	25/64	1.870	4.174
DH711013	13/64	.2031	1/4	1.082	3.228	DH711024	3/8	.3750	3/8	1.969	4.174
0141BTE	7/32	.2188	15/64	1.181	3.228	0241BTE	3/8	.3750	25/64	1.969	4.174
DH711014	7/32	.2188	1/4	1.181	3.228	0251BTE	25/64	.3906	25/64	1.969	4.174
0151BTE	15/64	.2344	15/64	1.181	3.228	DH711025	25/64	.3906	7/16	1.969	4.174
DH711015	15/64	.2344	1/4	1.181	3.228	0261BTE	13/32	.4062	27/64	2.067	4.567
DH711016	1/4	.2500	1/4	1.279	3.465	DH711026	13/32	.4062	7/16	2.067	4.567
0161BTE	1/4	.2500	17/64	1.279	3.465	0271BTE	27/64	.4219	27/64	2.165	4.567
2061BTE	F	.2570	17/64	1.279	3.465	DH711027	27/64	.4219	7/16	2.165	4.567
DH711206	F	.2570	5/16	1.279	3.465	DH711028	7/16	.4375	7/16	2.264	4.803
0171BTE	17/64	.2656	17/64	1.378	3.465	0281BTE	7/16	.4375	15/32	2.264	4.803
DH711017	17/64	.2656	5/16	1.378	3.465	0291BTE	29/64	.4531	15/32	2.264	4.803
2091BTE	I	.2720	.2720	1.378	3.465	DH711029	29/64	.4531	1/2	2.264	4.803
DH711209	I	.2720	5/16	1.378	3.465	0301BTE	15/32	.4688	15/32	2.362	4.803
0181BTE	9/32	.2812	5/16	1.476	3.701	DH711030	15/32	.4688	1/2	2.362	4.803
0191BTE	19/64	.2969	5/16	1.476	3.701	0311BTE	31/64	.4844	1/2	2.461	5.039
0201BTE	5/16	.3125	5/16	1.575	3.701	0321BTE	1/2	.5000	1/2	2.559	5.039
0211BTE	21/64	.3281	11/32	1.673	3.937	0331BTE	33/64	.5156	35/64	2.657	5.276
DH711021	21/64	.3281	3/8	1.673	3.937	DH711033	33/64	.5156	9/16	2.657	5.276
2171BTE	Q	.3320	11/32	1.673	3.937	0341BTE	17/32	.5312	35/64	2.756	5.276

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	42	45	48	52	55	58	62	65	68	72	75	78	82	85
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES
DH416
DH711

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT
3 x D

DH416 *1BTF Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
TiAIN	D1		D2	L1	L2	TiAIN	D1		D2	L1	L2
DH711034	17/32	.5312	9/16	2.756	5.276	0371BTE	37/64	.5781	37/64	2.953	5.512
0351BTE	35/64	.5469	35/64	2.756	5.276	DH711037	37/64	.5781	5/8	2.953	5.512
DH711035	35/64	.5469	9/16	2.756	5.276	0381BTE	19/32	.5937	5/8	3.051	5.709
DH711036	9/16	.5625	9/16	2.854	5.512	0391BTE	39/64	.6094	5/8	3.051	5.709
0361BTE	9/16	.5625	37/64	2.854	5.512	0401BTE	5/8	.6250	5/8	3.150	5.709

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	35	38	42	45	48	52	55	58	62	65	68	72	75	78	82	85
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES
DH418
DH712

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



LONG
5x D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
TiAIN	D1		D2	L1	L2	TiAIN	D1		D2	L1	L2
0131CTE	13/64	.2031	15/64	1-3/4	3-15/16	DH712022	11/32	.3438	3/8	2-27/32	5
DH712013	13/64	.2031	1/4	1-3/4	3-15/16	DH712023	23/64	.3594	3/8	3	5-23/64
0141CTE	7/32	.2188	15/64	1-57/64	3-15/16	0231CTE	23/64	.3594	25/64	3	5-23/64
DH712014	7/32	.2188	1/4	1-57/64	3-15/16	DH712221	U	.3680	3/8	3	5-23/64
0151CTE	15/64	.2344	15/64	1-57/64	3-15/16	2211CTE	U	.3680	25/64	3	5-23/64
DH712015	15/64	.2344	1/4	1-57/64	3-15/16	DH712024	3/8	.3750	3/8	3-5/32	5-23/64
DH712016	1/4	.2500	1/4	2-3/64	4-19/64	0241CTE	3/8	.3750	25/64	3-5/32	5-23/64
0161CTE	1/4	.2500	17/64	2-3/64	4-19/64	0251CTE	25/64	.3906	25/64	3-5/32	5-23/64
2061CTE	F	.2570	17/64	2-13/64	4-19/64	DH712025	25/64	.3906	7/16	3-5/32	5-23/64
DH712206	F	.2570	5/16	2-13/64	4-19/64	0261CTE	13/32	.4062	27/64	3-5/16	5-7/8
0171CTE	17/64	.2656	17/64	2-13/64	4-19/64	DH712026	13/32	.4062	7/16	3-5/16	5-7/8
DH712017	17/64	.2656	5/16	2-13/64	4-19/64	0271CTE	27/64	.4219	27/64	3-15/32	5-7/8
2091CTE	I	.2720	.2720	2-13/64	4-19/64	DH712027	27/64	.4219	7/16	3-15/32	5-7/8
DH712209	I	.2720	5/16	2-13/64	4-19/64	DH712028	7/16	.4375	7/16	3-5/8	6-7/32
0181CTE	9/32	.2812	5/16	2-23/64	4-41/64	0281CTE	7/16	.4375	15/32	3-5/8	6-7/32
0191CTE	19/64	.2969	5/16	2-33/64	4-41/64	0291CTE	29/64	.4531	15/32	3-25/32	6-7/32
0201CTE	5/16	.3125	5/16	2-33/64	4-41/64	DH712029	29/64	.4531	1/2	3-25/32	6-7/32
0211CTE	21/64	.3281	11/32	2-43/64	5	0301CTE	15/32	.4688	15/32	3-25/32	6-7/32
DH712021	21/64	.3281	3/8	2-43/64	5	DH712030	15/32	.4688	1/2	3-25/32	6-7/32
2171CTE	Q	.3320	11/32	2-43/64	5	0311CTE	31/64	.4844	1/2	3-15/16	6-37/64
DH712217	Q	.3320	3/8	2-43/64	5	0321CTE	1/2	.5000	1/2	4-3/32	6-37/64
0221CTE	11/32	.3438	11/32	2-27/32	5						

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34						15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES
DH406

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT
3x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH406030	3.0		.1181	6	20	62	DH406051	5.1		.2008	6	28	66
DH406031	3.1		.1220	6	20	62	DH406013E	5.159	13/64	.2031	6	28	66
DH406008E	3.175	1/8	.1250	6	20	62	DH406052	5.2		.2047	6	28	66
DH406032	3.2		.1260	6	20	62	DH406053	5.3		.2087	6	28	66
DH406033	3.3		.1299	6	20	62	DH406054	5.4		.2126	6	28	66
DH406034	3.4		.1339	6	20	62	DH406055	5.5		.2165	6	28	66
DH406035	3.5		.1378	6	20	62	DH406014E	5.556	7/32	.2188	6	28	66
DH406009E	3.572	9/64	.1406	6	20	62	DH406056	5.6		.2205	6	28	66
DH406036	3.6		.1417	6	20	62	DH406057	5.7		.2244	6	28	66
DH406037	3.7		.1457	6	20	62	DH406058	5.8		.2283	6	28	66
DH406038	3.8		.1496	6	24	66	DH406059	5.9		.2323	6	28	66
DH406039	3.9		.1535	6	24	66	DH406015E	5.953	15/64	.2344	6	28	66
DH406010E	3.969	5/32	.1563	6	24	66	DH406060	6.0		.2362	6	28	66
DH406040	4.0		.1575	6	24	66	DH406061	6.1		.2402	8	34	79
DH406041	4.1		.1614	6	24	66	DH406062	6.2		.2441	8	34	79
DH406042	4.2		.1654	6	24	66	DH406063	6.3		.2480	8	34	79
DH406043	4.3		.1693	6	24	66	DH406016E	6.350	1/4	.2500	8	34	79
DH406011E	4.366	11/64	.1719	6	24	66	DH406064	6.4		.2520	8	34	79
DH406044	4.4		.1732	6	24	66	DH406065	6.5		.2559	8	34	79
DH406045	4.5		.1772	6	24	66	DH406006L	6.528	F	.2570	8	34	79
DH406046	4.6		.1811	6	24	66	DH406066	6.6		.2598	8	34	79
DH406047	4.7		.1850	6	24	66	DH406067	6.7		.2638	8	34	79
DH406012E	4.763	3/16	.1875	6	24	66	DH406017E	6.747	17/64	.2656	8	34	79
DH406048	4.8		.1890	6	28	66	DH406068	6.8		.2677	8	34	79
DH406049	4.9		.1929	6	28	66	DH406069	6.9		.2717	8	34	79
DH406050	5.0		.1969	6	28	66	DH406009L	6.909	I	.2720	8	34	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34						15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH406

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.88

SHORT
3 × D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH406157	15.7		.6181	16	65	115	DH406179	17.9		.7047	18	73	123
DH406158	15.8		.6220	16	65	115	DH406180	18.0		.7087	18	73	123
DH406040E	15.875	5/8	.6250	16	65	115	DH406181	18.1		.7126	20	79	131
DH406159	15.9		.6260	16	65	115	DH406182	18.2		.7165	20	79	131
DH406160	16.0		.6299	16	65	115	DH406183	18.3		.7205	20	79	131
DH406161	16.1		.6339	18	73	123	DH406184	18.4		.7244	20	79	131
DH406162	16.2		.6378	18	73	123	DH406185	18.5		.7283	20	79	131
DH406163	16.3		.6417	18	73	123	DH406186	18.6		.7323	20	79	131
DH406164	16.4		.6457	18	73	123	DH406187	18.7		.7362	20	79	131
DH406165	16.5		.6495	18	73	123	DH406188	18.8		.7402	20	79	131
DH406166	16.6		.6535	18	73	123	DH406189	18.9		.7441	20	79	131
DH406167	16.7		.6575	18	73	123	DH406190	19.0		.7480	20	79	131
DH406168	16.8		.6614	18	73	123	DH406048E	19.050	3/4	.7500	20	79	131
DH406169	16.9		.6654	18	73	123	DH406191	19.1		.7520	20	79	131
DH406170	17.0		.6692	18	73	123	DH406192	19.2		.7559	20	79	131
DH406171	17.1		.6732	18	73	123	DH406193	19.3		.7598	20	79	131
DH406172	17.2		.6772	18	73	123	DH406194	19.4		.7638	20	79	131
DH406173	17.3		.6811	18	73	123	DH406195	19.5		.7676	20	79	131
DH406174	17.4		.6850	18	73	123	DH406196	19.6		.7717	20	79	131
DH406044E	17.463	11/16	.6875	18	73	123	DH406197	19.7		.7756	20	79	131
DH406175	17.5		.6889	18	73	123	DH406198	19.8		.7795	20	79	131
DH406176	17.6		.6929	18	73	123	DH406199	19.9		.7835	20	79	131
DH406177	17.7		.6968	18	73	123	DH406200	20.0		.7874	20	79	131
DH406178	17.8		.7008	18	73	123							

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	42	45	48	52	55	58	60	62	65	68	70	72	74	76
HB	125	190	250	270	300	300	350	380	400	450	450	500	550	600	600	650	700	750	800	850
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	40	50	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH408

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.88

LONG
5 × D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH408010	1.0		.0394	3	8	55	DH408033	3.3		.1299	6	28	66
DH408011	1.1		.0433	3	12	55	DH408034	3.4		.1339	6	28	66
DH408012	1.2		.0472	3	12	55	DH408035	3.5		.1378	6	28	66
DH408013	1.3		.0512	3	12	55	DH408009E	3.572	9/64	.1406	6	28	66
DH408014	1.4		.0551	3	12	55	DH408036	3.6		.1417	6	28	66
DH408015	1.5		.0591	3	16	55	DH408037	3.7		.1457	6	28	66
DH408004E	1.588	1/16	.0625	3	16	55	DH408038	3.8		.1496	6	36	74
DH408016	1.6		.0630	3	16	55	DH408039	3.9		.1535	6	36	74
DH408017	1.7		.0669	3	16	55	DH408010E	3.969	5/32	.1563	6	36	74
DH408018	1.8		.0709	3	16	55	DH408040	4.0		.1575	6	36	74
DH408019	1.9		.0748	3	16	55	DH408041	4.1		.1614	6	36	74
DH408005E	1.984	5/64	.0781	3	16	55	DH408042	4.2		.1654	6	36	74
DH408020	2.0		.0787	4	21	57	DH408043	4.3		.1693	6	36	74
DH408021	2.1		.0827	4	21	57	DH408011E	4.366	11/64	.1719	6	36	74
DH408022	2.2		.0866	4	21	57	DH408044	4.4		.1732	6	36	74
DH408023	2.3		.0906	4	21	57	DH408045	4.5		.1772	6	36	74
DH408006E	2.381	3/32	.0938	4	21	57	DH408046	4.6		.1811	6	36	74
DH408024	2.4		.0945	4	21	57	DH408047	4.7		.1850	6	36	74
DH408025	2.5		.0984	4	21	57	DH408012E	4.763	3/16	.1875	6	36	74
DH408026	2.6		.1024	4	21	57	DH408048	4.8		.1890	6	44	82
DH408027	2.7		.1063	4	21	57	DH408049	4.9		.1929	6	44	82
DH408007E	2.778	7/64	.1094	4	21	57	DH408050	5.0		.1969	6	44	82
DH408028	2.8		.1102	4	21	57	DH408051	5.1		.2008	6	44	82
DH408029	2.9		.1142	4	21	57	DH408013E	5.159	13/64	.2031	6	44	82
DH408030	3.0		.1181	6	28	66	DH408052	5.2		.2047	6	44	82
DH408031	3.1		.1220	6	28	66	DH408053	5.3		.2087	6	44	82
DH408008E	3.175	1/8	.1250	6	28	66	DH408054	5.4		.2126	6	44	82
DH408032	3.2		.1260	6	28	66	DH408055	5.5		.2165	6	44	82

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	38	42	45	48	52	55	58	60	62	65	68	70	72	74	76
HB	125	190	250	270	300	300	350	380	400	450	450	500	550	600	600	650	700	750	800	850
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC																					

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH408

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.88

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH408014E	5.556	7/32	.2188	6	44	82	DH408076	7.6		.2992	8	53	91
DH408056	5.6		.2205	6	44	82	DH408077	7.7		.3031	8	53	91
DH408057	5.7		.2244	6	44	82	DH408078	7.8		.3071	8	53	91
DH408058	5.8		.2283	6	44	82	DH408079	7.9		.3110	8	53	91
DH408059	5.9		.2323	6	44	82	DH408020E	7.938	5/16	.3125	8	53	91
DH408015E	5.953	15/64	.2344	6	44	82	DH408080	8.0		.3150	8	53	91
DH408060	6.0		.2362	6	44	82	DH408081	8.1		.3189	10	61	103
DH408061	6.1		.2402	8	53	91	DH408082	8.2		.3228	10	61	103
DH408062	6.2		.2441	8	53	91	DH408083	8.3		.3268	10	61	103
DH408063	6.3		.2480	8	53	91	DH408021E	8.334	21/64	.3281	10	61	103
DH408016E	6.350	1/4	.2500	8	53	91	DH408084	8.4		.3307	10	61	103
DH408064	6.4		.2520	8	53	91	DH408017L	8.433	Q	.3320	10	61	103
DH408065	6.5		.2559	8	53	91	DH408085	8.5		.3346	10	61	103
DH408006L	6.528	F	.2570	8	53	91	DH408086	8.6		.3386	10	61	103
DH408066	6.6		.2598	8	53	91	DH408087	8.7		.3425	10	61	103
DH408067	6.7		.2638	8	53	91	DH408022E	8.731	11/32	.3438	10	61	103
DH408017E	6.747	17/64	.2656	8	53	91	DH408088	8.8		.3465	10	61	103
DH408068	6.8		.2677	8	53	91	DH408089	8.9		.3504	10	61	103
DH408069	6.9		.2717	8	53	91	DH408090	9.0		.3543	10	61	103
DH408009L	6.909	I	.2720	8	53	91	DH408091	9.1		.3583	10	61	103
DH408070	7.0		.2756	8	53	91	DH408023E	9.128	23/64	.3594	10	61	103
DH408071	7.1		.2795	8	53	91	DH408092	9.2		.3622	10	61	103
DH408018E	7.144	9/32	.2812	8	53	91	DH408093	9.3		.3661	10	61	103
DH408072	7.2		.2835	8	53	91	DH408021L	9.347	U	.3680	10	61	103
DH408073	7.3		.2874	8	53	91	DH408094	9.4		.3701	10	61	103
DH408074	7.4		.2913	8	53	91	DH408095	9.5		.3740	10	61	103
DH408075	7.5		.2953	8	53	91	DH408024E	9.525	3/8	.3750	10	61	103
DH408019E	7.541	19/64	.2969	8	53	91	DH408096	9.6		.3780	10	61	103

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH408

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.88

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH408097	9.7		.3819	10	61	103	DH408030E	11.906	15/32	.4688	12	71	118
DH408098	9.8		.3858	10	61	103	DH408120	12.0		.4724	12	71	118
DH408099	9.9		.3898	10	61	103	DH408121	12.1		.4764	14	77	124
DH408025E	9.922	25/64	.3906	10	61	103	DH408122	12.2		.4803	14	77	124
DH408100	10.0		.3937	10	61	103	DH408123	12.3		.4843	14	77	124
DH408101	10.1		.3976	12	71	118	DH408031E	12.303	31/64	.4844	14	77	124
DH408102	10.2		.4016	12	71	118	DH408124	12.4		.4882	14	77	124
DH408103	10.3		.4055	12	71	118	DH408125	12.5		.4921	14	77	124
DH408026E	10.319	13/32	.4062	12	71	118	DH408126	12.6		.4961	14	77	124
DH408104	10.4		.4094	12	71	118	DH408032E	12.7	1/2	.5000	14	77	124
DH408105	10.5		.4134	12	71	118	DH408128	12.8		.5039	14	77	124
DH408106	10.6		.4173	12	71	118	DH408129	12.9		.5079	14	77	124
DH408107	10.7		.4212	12	71	118	DH408130	13.0		.5118	14	77	124
DH408027E	10.716	27/64	.4219	12	71	118	DH408131	13.1		.5157	14	77	124
DH408108	10.8		.4252	12	71	118	DH408132	13.2		.5197	14	77	124
DH408109	10.9		.4291	12	71	118	DH408133	13.3		.5236	14	77	124
DH408110	11.0		.4330	12	71	118	DH408134	13.4		.5276	14	77	124
DH408111	11.1		.4370	12	71	118	DH408135	13.5		.5314	14	77	124
DH408028E	11.113	7/16	.4375	12	71	118	DH408136	13.6		.5354	14	77	124
DH408112	11.2		.4409	12	71	118	DH408137	13.7		.5394	14	77	124
DH408113	11.3		.4448	12	71	118	DH408138	13.8		.5433	14	77	124
DH408114	11.4		.4488	12	71	118	DH408139	13.9		.5472	14	77	124
DH408115	11.5		.4527	12	71	118	DH408140	14.0		.5512	14	77	124
DH408029E	11.509	29/64	.4531	12	71	118	DH408141	14.1		.5551	16	83	133
DH408116	11.6		.4566	12	71	118	DH408142	14.2		.5591	16	83	133
DH408117	11.7		.4606	12	71	118	DH408036E	14.288	9/16	.5625	16	83	133
DH408118	11.8		.4645	12	71	118	DH408143	14.3		.5630	16	83	133
DH408119	11.9		.4685	12	71	118	DH408144	14.4		.5669	16	83	133

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38		

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH408

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.88

LONG
5 × D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
TiAIN	D1					
DH408145	14.5		.5708	16	83	133
DH408146	14.6		.5748	16	83	133
DH408147	14.7		.5787	16	83	133
DH408148	14.8		.5827	16	83	133
DH408149	14.9		.5866	16	83	133
DH408150	15.0		.5905	16	83	133
DH408151	15.1		.5945	16	83	133
DH408152	15.2		.5984	16	83	133
DH408153	15.3		.6024	16	83	133
DH408154	15.4		.6063	16	83	133
DH408155	15.5		.6102	16	83	133
DH408156	15.6		.6142	16	83	133
DH408157	15.7		.6181	16	83	133
DH408158	15.8		.6220	16	83	133
DH408159	15.9		.6260	16	83	133
DH408160	16.0		.6299	16	83	133
DH408161	16.1		.6339	18	93	143
DH408162	16.2		.6378	18	93	143
DH408163	16.3		.6417	18	93	143
DH408164	16.4		.6457	18	93	143
DH408165	16.5		.6495	18	93	143
DH408166	16.6		.6535	18	93	143
DH408167	16.7		.6575	18	93	143
DH408168	16.8		.6614	18	93	143
DH408169	16.9		.6654	18	93	143
DH408170	17.0		.6692	18	93	143
DH408171	17.1		.6732	18	93	143
DH408172	17.2		.6772	18	93	143

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Fractional	Decimal			
TiAIN	D1					
DH408173	17.3		.6811	18	93	143
DH408174	17.4		.6850	18	93	143
DH408175	17.5		.6889	18	93	143
DH408176	17.6		.6929	18	93	143
DH408177	17.7		.6968	18	93	143
DH408178	17.8		.7008	18	93	143
DH408179	17.9		.7047	18	93	143
DH408180	18.0		.7087	18	93	143
DH408181	18.1		.7126	20	101	153
DH408182	18.2		.7165	20	101	153
DH408183	18.3		.7205	20	101	153
DH408184	18.4		.7244	20	101	153
DH408185	18.5		.7283	20	101	153
DH408186	18.6		.7323	20	101	153
DH408187	18.7		.7362	20	101	153
DH408188	18.8		.7402	20	101	153
DH408189	18.9		.7441	20	101	153
DH408190	19.0		.7480	20	101	153
DH408191	19.1		.7520	20	101	153
DH408192	19.2		.7559	20	101	153
DH408193	19.3		.7598	20	101	153
DH408194	19.4		.7638	20	101	153
DH408195	19.5		.7676	20	101	153
DH408196	19.6		.7717	20	101	153
DH408197	19.7		.7756	20	101	153
DH408198	19.8		.7795	20	101	153
DH408199	19.9		.7835	20	101	153
DH408200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978</

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL with COOLANT HOLES

SERIES

DH421

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

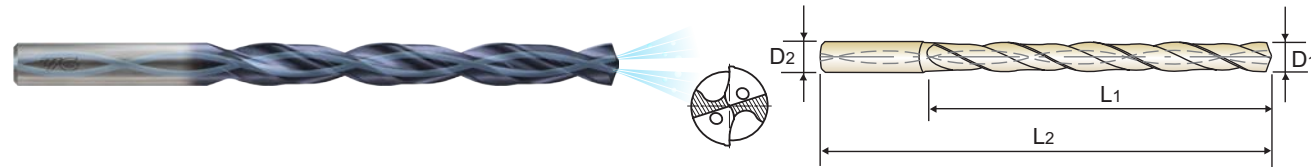

DIN 6537 **CARBIDE** **h6** **m7** **140°** **20 bar** **TiAIN** **EXTRA LONG** **8 x D** p.88

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH421154	15.4		.6063	16	152	203
DH421155	15.5		.6102	16	152	203
DH421156	15.6		.6142	16	152	203
DH421157	15.7		.6181	16	152	203
DH421158	15.8		.6220	16	152	203
DH421040E	15.875	5/8	.6250	16	152	203
DH421159	15.9		.6260	16	152	203
DH421160	16.0		.6299	16	152	203
DH421161	16.1		.6339	18	171	222
DH421162	16.2		.6378	18	171	222
DH421163	16.3		.6417	18	171	222
DH421164	16.4		.6457	18	171	222
DH421165	16.5		.6496	18	171	222
DH421166	16.6		.6535	18	171	222
DH421167	16.7		.6575	18	171	222
DH421168	16.8		.6614	18	171	222
DH421169	16.9		.6654	18	171	222
DH421170	17.0		.6693	18	171	222
DH421171	17.1		.6732	18	171	222
DH421172	17.2		.6772	18	171	222
DH421173	17.3		.6811	18	171	222
DH421174	17.4		.6850	18	171	222
DH421175	17.5		.6890	18	171	222
DH421176	17.6		.6929	18	171	222
DH421177	17.7		.6968	18	171	222

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH414

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

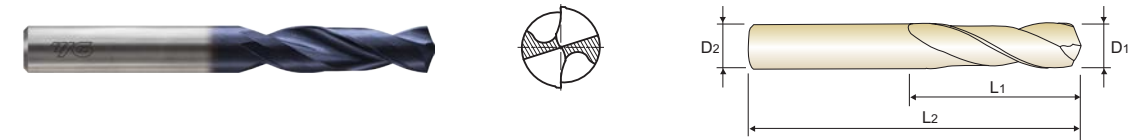

CARBIDE **h6** **140°** **TiAIN** **STUB** **3 x D** p.90

EDP No.	Drill Diameter		Flute Length	Overall Length
	Fractional	Decimal		
TiAIN	D1 = D2		L1	L2
0081ATE	1/8	.1250	45/64	1-59/64
0091ATE	9/64	.1406	25/32	2-3/64
0101ATE	5/32	.1562	7/8	2-3/16
0111ATE	11/64	.1719	15/16	2-9/32
0121ATE	3/16	.1875	1	2-7/16
0131ATE	13/64	.2031	1	2-7/16
0141ATE	7/32	.2188	1-1/8	2-5/8
0151ATE	15/64	.2344	1-1/8	2-5/8
0161ATE	1/4	.2500	1-5/8	3-3/16
2061ATE	F	.2570	1-11/16	3-17/64
0171ATE	17/64	.2656	1-11/16	3-17/64
2091ATE	I	.2720	1-11/16	3-17/64
0181ATE	9/32	.2812	1-3/4	3-7/16
0191ATE	19/64	.2969	1-7/8	3-9/16
0201ATE	5/16	.3125	1-7/8	3-9/16
0211ATE	21/64	.3281	2-1/16	3-3/4
2171ATE	Q	.3320	2-1/16	3-3/4

EDP No.	Drill Diameter		Flute Length	Overall Length
	Fractional	Decimal		
TiAIN	D1 = D2		L1	L2
0221ATE	11/32	.3438	2-3/16	3-7/8
0231ATE	23/64	.3594	2-9/32	4
2211ATE	U	.3680	2-9/32	4
0241ATE	3/8	.3750	2-3/8	4-1/8
0251ATE	25/64	.3906	2-3/8	4-1/8
0261ATE	13/32	.4062	2-5/8	4-13/32
0271ATE	27/64	.4219	2-11/16	4-1/2
0281ATE	7/16	.4375	2-13/16	4-5/8
0291ATE	29/64	.4531	2-7/8	4-3/4
0301ATE	15/32	.4688	2-7/8	4-3/4
0311ATE	31/64	.4844	3	5-5/16
0321ATE	1/2	.5000	3-1/16	5-3/8
0331ATE	33/64	.5156	3-11/32	5-11/16
0341ATE	17/32	.5312	3-11/32	5-11/16
0361ATE	9/16	.5625	3-1/2	5-15/16
0371ATE	37/64	.5781	3-37/64	6
0401ATE	5/8	.6250	3-25/32	6-19/64

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○


ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAlN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH722

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

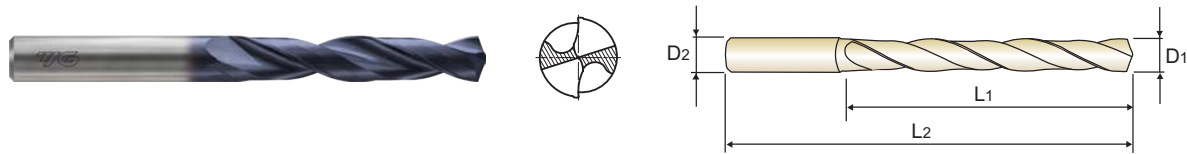

LONG
5 × D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAlN	D1		D2	L1	L2
DH722013	13/64	.2031	1/4	1-3/4	3-15/16
DH722014	7/32	.2188	1/4	1-57/64	3-15/16
DH722015	15/64	.2344	1/4	1-57/64	3-15/16
DH722016	1/4	.2500	1/4	2-3/64	4-19/64
DH72206	F	.2570	5/16	2-13/64	4-19/64
DH722017	17/64	.2656	5/16	2-13/64	4-19/64
DH722209	I	.2720	5/16	2-13/64	4-19/64
DH722018	9/32	.2812	5/16	2-23/64	4-41/64
DH722019	19/64	.2969	5/16	2-33/64	4-41/64
DH722020	5/16	.3125	5/16	2-33/64	4-41/64
DH722021	21/64	.3281	3/8	2-43/64	5
DH722217	Q	.3320	3/8	2-43/64	5

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAlN	D1		D2	L1	L2
DH722022	11/32	.3438	3/8	2-27/32	5
DH722023	23/64	.3594	3/8	3	5-23/64
DH722221	U	.3680	3/8	3	5-23/64
DH722024	3/8	.3750	3/8	3-5/32	5-23/64
DH722025	25/64	.3906	7/16	3-5/32	5-23/64
DH722026	13/32	.4062	7/16	3-5/16	5-7/8
DH722027	27/64	.4219	7/16	3-15/32	5-7/8
DH722028	7/16	.4375	7/16	3-5/8	6-7/32
DH722029	29/64	.4531	1/2	3-25/32	6-7/32
DH722030	15/32	.4688	1/2	3-25/32	6-7/32
DH722031	31/64	.4844	1/2	3-15/16	6-37/64
DH722032	1/2	.5000	1/2	4-3/32	6-37/64

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAlN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH404

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



STUB
3 × D

Unit : mm

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
TiAlN	D1 = D2		L1	L2
DH404030	3.0	.1181	16	46
DH404031	3.1	.1220	18	49
DH404032	3.2	.1260	18	49
DH404033	3.3	.1299	18	49
DH404034	3.4	.1339	20	52
DH404035	3.5	.1378	20	52
DH404036	3.6	.1417	20	52
DH404037	3.7	.1457	20	52
DH404038	3.8	.1496	22	55
DH404039	3.9	.1535	22	55
DH404040	4.0	.1575	22	55
DH404041	4.1	.1614	22	55
DH404042	4.2	.1654	22	55
DH404043	4.3	.1693	24	58
DH404044	4.4	.1732	24	58
DH404045	4.5	.1772	24	58
DH404046	4.6	.1811	24	58
DH404047	4.7	.1850	24	58
DH404048	4.8	.1890	26	62
DH404049	4.9	.1929	26	62
DH404050	5.0	.1969	26	62
DH404051	5.1	.2008	26	62
DH404052	5.2	.2047	26	62
DH404053	5.3	.2087	26	62
DH404054	5.4	.2126	28	66
DH404055	5.5	.2165	28	66

Unit : mm

EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch		
TiAlN	D1 = D2		L1	L2
DH404056	5.6	.2205	28	66
DH404057	5.7	.2244	28	66
DH404058	5.8	.2283	28	66
DH404059	5.9	.2323	28	66
DH404060	6.0	.2362	28	66
DH404061	6.1	.2402	31	70
DH404062	6.2	.2441	31	70
DH404063	6.3	.2480	31	70
DH404064	6.4	.2520	31	70
DH404065	6.5	.2559	31	70
DH404066	6.6	.2598	31	70
DH404067	6.7	.2638	31	70
DH404068	6.8	.2677	34	74
DH404069	6.9	.2717	34	74
DH404070	7.0	.2756	34	74
DH404071	7.1	.2795	34	74
DH404072	7.2	.2835	34	74
DH404073	7.3	.2874	34	74
DH404074	7.4	.2913	34	74
DH404075	7.5	.2953	34	74
DH404076	7.6	.2992	37	79
DH404077	7.7	.3031	37	79
DH404078	7.8	.3071	37	79
DH404079	7.9	.3110	37	79
DH404080	8.0	.3150	37	79
DH404081	8.1	.3189	37	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	45	15	35	15	23	10	26	3	25	13	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	○	◎	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH404

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



STUB
3 x D

Unit : mm

EDP No.	Drill Diameter		Flute Length	Overall Length	EDP No.	Drill Diameter		Flute Length	Overall Length
	Metric	Inch				Metric	Inch		
TiAIN	D1 = D2		L1	L2	TiAIN	D1 = D2		L1	L2
DH404082	8.2	.3228	37	79	DH404105	10.5	.4134	43	89
DH404083	8.3	.3268	37	79	DH404110	11.0	.4331	47	95
DH404084	8.4	.3307	37	79	DH404115	11.5	.4528	47	95
DH404085	8.5	.3346	37	79	DH404120	12.0	.4724	51	102
DH404086	8.6	.3386	40	84	DH404130	13.0	.5118	51	102
DH404087	8.7	.3425	40	84	DH404135	13.5	.5314	54	107
DH404088	8.8	.3465	40	84	DH404140	14.0	.5512	54	107
DH404089	8.9	.3504	40	84	DH404145	14.5	.5708	56	111
DH404090	9.0	.3543	40	84	DH404150	15.0	.5905	56	111
DH404091	9.1	.3583	40	84	DH404155	15.5	.6102	58	115
DH404092	9.2	.3622	40	84	DH404160	16.0	.6299	58	115
DH404093	9.3	.3661	40	84	DH404165	16.5	.6495	60	119
DH404094	9.4	.3701	40	84	DH404170	17.0	.6692	60	119
DH404095	9.5	.3740	40	84	DH404175	17.5	.6889	62	123
DH404096	9.6	.3780	43	89	DH404180	18.0	.7087	62	123
DH404097	9.7	.3819	43	89	DH404185	18.5	.7283	64	127
DH404098	9.8	.3858	43	89	DH404190	19.0	.7480	64	127
DH404099	9.9	.3898	43	89	DH404195	19.5	.7676	66	131
DH404100	10.0	.3937	43	89	DH404200	20.0	.7874	66	131
DH404102	10.2	.4016	43	89					

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○


ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH423

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

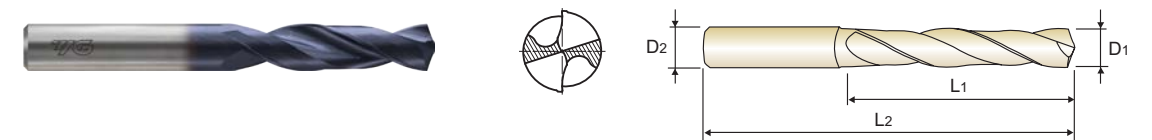

SHORT
3 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH423030	3.0		.1181	6	20	62	DH423051	5.1		.2008	6	28	66
DH423031	3.1		.1220	6	20	62	DH423013E	5.159	13/64	.2031	6	28	66
DH423008E	3.175	1/8	.1250	6	20	62	DH423052	5.2		.2047	6	28	66
DH423032	3.2		.1260	6	20	62	DH423053	5.3		.2087	6	28	66
DH423033	3.3		.1299	6	20	62	DH423054	5.4		.2126	6	28	66
DH423034	3.4		.1339	6	20	62	DH423055	5.5		.2165	6	28	66
DH423035	3.5		.1378	6	20	62	DH423014E	5.556	7/32	.2188	6	28	66
DH423009E	3.572	9/64	.1406	6	20	62	DH423056	5.6		.2205	6	28	66
DH423036	3.6		.1417	6	20	62	DH423057	5.7		.2244	6	28	66
DH423037	3.7		.1457	6	20	62	DH423058	5.8		.2283	6	28	66
DH423038	3.8		.1496	6	24	66	DH423059	5.9		.2323	6	28	66
DH423039	3.9		.1535	6	24	66	DH423015E	5.953	15/64	.2344	6	28	66
DH423010E	3.969	5/32	.1563	6	24	66	DH423060	6.0		.2362	6	28	66
DH423040	4.0		.1575	6	24	66	DH423061	6.1		.2402	8	34	79
DH423041	4.1		.1614	6	24	66	DH423062	6.2		.2441	8	34	79
DH423042	4.2		.1654	6	24	66	DH423063	6.3		.2480	8	34	79
DH423043	4.3		.1693	6	24	66	DH423016E	6.350	1/4	.2500	8	34	79
DH423011E	4.366	11/64	.1719	6	24	66	DH423064	6.4		.2520	8	34	79
DH423044	4.4		.1732	6	24	66	DH423065	6.5		.2559	8	34	79
DH423045	4.5		.1772	6	24	66	DH423006L	6.528	F	.2570	8	34	79
DH423046	4.6		.1811	6	24	66	DH423066	6.6		.2598	8	34	79
DH423047	4.7		.1850	6	24	66	DH423067	6.7		.2638	8	34	79
DH423012E	4.763	3/16	.1875	6	24	66	DH423017E	6.747	17/64	.2656	8	34	79
DH423048	4.8		.1890	6	28	66	DH423068	6.8		.2677	8	34	79
DH423049	4.9		.1929	6	28	66	DH423069	6.9		.2717	8	34	79
DH423050	5.0		.1969	6	28	66	DH423009L	6.909	I	.2720	8	34	79

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○


ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH423

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

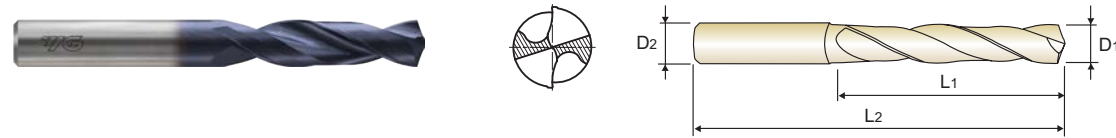

SHORT
3 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH423070	7.0		.2756	8	34	79	DH423090	9.0		.3543	10	47	89
DH423071	7.1		.2795	8	41	79	DH423091	9.1		.3583	10	47	89
DH423018E	7.144	9/32	.2812	8	41	79	DH423023E	9.128	23/64	.3594	10	47	89
DH423072	7.2		.2835	8	41	79	DH423092	9.2		.3622	10	47	89
DH423073	7.3		.2874	8	41	79	DH423093	9.3		.3661	10	47	89
DH423074	7.4		.2913	8	41	79	DH423021L	9.347	U	.3680	10	47	89
DH423075	7.5		.2953	8	41	79	DH423094	9.4		.3701	10	47	89
DH423019E	7.541	19/64	.2969	8	41	79	DH423095	9.5		.3740	10	47	89
DH423076	7.6		.2992	8	41	79	DH423024E	9.525	3/8	.3750	10	47	89
DH423077	7.7		.3031	8	41	79	DH423096	9.6		.3780	10	47	89
DH423078	7.8		.3071	8	41	79	DH423097	9.7		.3819	10	47	89
DH423079	7.9		.3110	8	41	79	DH423098	9.8		.3858	10	47	89
DH423020E	7.938	5/16	.3125	8	41	79	DH423099	9.9		.3898	10	47	89
DH423080	8.0		.3150	8	41	79	DH423025E	9.922	25/64	.3906	10	47	89
DH423081	8.1		.3189	10	47	89	DH423100	10.0		.3937	10	47	89
DH423082	8.2		.3228	10	47	89	DH423101	10.1		.3976	12	55	102
DH423083	8.3		.3268	10	47	89	DH423102	10.2		.4016	12	55	102
DH423021E	8.334	21/64	.3281	10	47	89	DH423103	10.3		.4055	12	55	102
DH423084	8.4		.3307	10	47	89	DH423026E	10.319	13/32	.4062	12	55	102
DH423017L	8.433	Q	.3320	10	47	89	DH423104	10.4		.4094	12	55	102
DH423085	8.5		.3346	10	47	89	DH423105	10.5		.4134	12	55	102
DH423086	8.6		.3386	10	47	89	DH423106	10.6		.4173	12	55	102
DH423087	8.7		.3425	10	47	89	DH423107	10.7		.4213	12	55	102
DH423022E	8.731	11/32	.3438	10	47	89	DH423027E	10.716	27/64	.4219	12	55	102
DH423088	8.8		.3465	10	47	89	DH423108	10.8		.4252	12	55	102
DH423089	8.9		.3504	10	47	89	DH423109	10.9		.4291	12	55	102

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K																																
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron																								
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	55	60	42	55	55	60	42	55	55	60	42	55				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400	550	550	630	400	550	550	630	400	550				
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH423

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

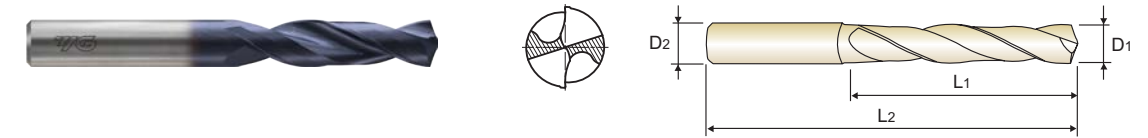

SHORT
3 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH423110	11.0		.4331	12	55	102	DH423132	13.2		.5197	14	60	107
DH423111	11.1		.4370	12	55	102	DH423133	13.3		.5236	14	60	107
DH423028E	11.113	7/16	.4375	12	55	102	DH423134	13.4		.5276	14	60	107
DH423112	11.2		.4409	12	55	102	DH423135	13.5		.5315	14	60	107
DH423113	11.3		.4449	12	55	102	DH423136	13.6		.5354	14	60	107
DH423114	11.4		.4488	12	55	102	DH423137	13.7		.5394	14	60	107
DH423115	11.5		.4528	12	55	102	DH423138	13.8		.5433	14	60	107
DH423029E	11.509	29/64	.4531	12	55	102	DH423139	13.9		.5472	14	60	107
DH423116	11.6		.4567	12	55	102	DH423140	14.0		.5512	14	60	107
DH423117	11.7		.4606	12	55	102	DH423141	14.1		.5551	16	65	115
DH423118	11.8		.4646	12	55	102	DH423142	14.2		.5591	16	65	115
DH423119	11.9		.4685	12	55	102	DH423036E	14.288	9/16	.5625	16	65	115
DH423030E	11.906	15/32	.4688	12	55	102	DH423143	14.3		.5630	16	65	115
DH423120	12.0		.4724	12	55	102	DH423144	14.4		.5669	16	65	115
DH423121	12.1		.4764	14	60	107	DH423145	14.5		.5708	16	65	115
DH423122	12.2		.4803	14	60	107	DH423146	14.6		.5748	16	65	115
DH423123	12.3		.4843	14	60	107	DH423147	14.7		.5787	16	65	115
DH423031E	12.303	31/64	.4844	14	60	107	DH423148	14.8		.5827	16	65	115
DH423124	12.4		.4882	14	60	107	DH423149	14.9		.5866	16	65	115
DH423125	12.5		.4921	14	60	107	DH423150	15.0		.5905	16	65	115
DH423126	12.6		.4961	14	60	107	DH423151	15.1		.5945	16	65	115
DH423032E	12.7	1/2	.5000	14	60	107	DH423152	15.2		.5984	16	65	115
DH423128	12.8		.5039	14	60	107	DH423153	15.3		.6024	16	65	115
DH423129	12.9		.5079	14	60	107	DH423154	15.4		.6063	16	65	115
DH423130	13.0		.5118	14	60	107	DH423155	15.5		.6102	16	65	115
DH423131	13.1		.5157	14	60	107	DH423156	15.6		.6142	16	65	115

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K																												
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron																				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	55	60	42	55	55	60	42	55	55	60	42	55
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	550	630	400	550	550	630	400	550	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎</																																	

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH424

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH424134	13.4		.5276	14	77	124	DH424040E	15.875	5/8	.6250	16	83	133
DH424135	13.5		.5315	14	77	124	DH424159	15.9		.6260	16	83	133
DH424136	13.6		.5354	14	77	124	DH424160	16.0		.6299	16	83	133
DH424137	13.7		.5394	14	77	124	DH424161	16.1		.6339	18	93	143
DH424138	13.8		.5433	14	77	124	DH424162	16.2		.6378	18	93	143
DH424139	13.9		.5472	14	77	124	DH424163	16.3		.6417	18	93	143
DH424140	14.0		.5512	14	77	124	DH424164	16.4		.6457	18	93	143
DH424141	14.1		.5551	16	83	133	DH424165	16.5		.6495	18	93	143
DH424142	14.2		.5591	16	83	133	DH424166	16.6		.6535	18	93	143
DH424036E	14.288	9/16	.5625	16	83	133	DH424167	16.7		.6575	18	93	143
DH424143	14.3		.5630	16	83	133	DH424168	16.8		.6614	18	93	143
DH424144	14.4		.5669	16	83	133	DH424169	16.9		.6654	18	93	143
DH424145	14.5		.5708	16	83	133	DH424170	17.0		.6692	18	93	143
DH424146	14.6		.5748	16	83	133	DH424171	17.1		.6732	18	93	143
DH424147	14.7		.5787	16	83	133	DH424172	17.2		.6772	18	93	143
DH424148	14.8		.5827	16	83	133	DH424173	17.3		.6811	18	93	143
DH424149	14.9		.5866	16	83	133	DH424174	17.4		.6850	18	93	143
DH424150	15.0		.5905	16	83	133	DH424175	17.5		.6889	18	93	143
DH424151	15.1		.5945	16	83	133	DH424176	17.6		.6929	18	93	143
DH424152	15.2		.5984	16	83	133	DH424177	17.7		.6968	18	93	143
DH424153	15.3		.6024	16	83	133	DH424178	17.8		.7008	18	93	143
DH424154	15.4		.6063	16	83	133	DH424179	17.9		.7047	18	93	143
DH424155	15.5		.6102	16	83	133	DH424180	18.0		.7087	18	93	143
DH424156	15.6		.6142	16	83	133	DH424181	18.1		.7126	20	101	153
DH424157	15.7		.6181	16	83	133	DH424182	18.2		.7165	20	101	153
DH424158	15.8		.6220	16	83	133	DH424183	18.3		.7205	20	101	153

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	45	15	23	23	10	10	26	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	○	◎	○	


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - GENERAL without COOLANT HOLES

SERIES

DH424

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

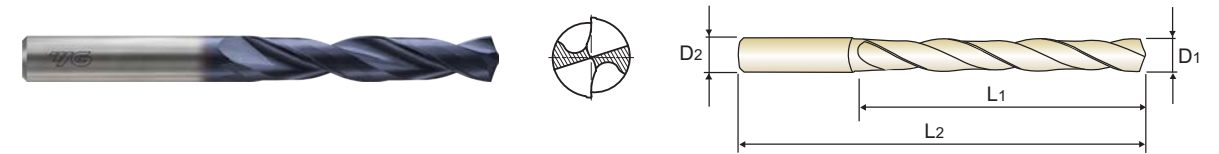

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH424184	18.4		.7244	20	101	153	DH424192	19.2		.7559	20	101	153
DH424185	18.5		.7283	20	101	153	DH424193	19.3		.7598	20	101	153
DH424186	18.6		.7323	20	101	153	DH424194	19.4		.7638	20	101	153
DH424187	18.7		.7362	20	101	153	DH424195	19.5		.7676	20	101	153
DH424188	18.8		.7402	20	101	153	DH424196	19.6		.7717	20	101	153
DH424189	18.9		.7441	20	101	153	DH424197	19.7		.7756	20	101	153
DH424190	19.0		.7480	20	101	153	DH424198	19.8		.7795	20	101	153
DH424048E	19.005	3/4	.7500	20	101	153	DH424199	19.9		.7835	20	101	153
DH424191	19.1		.7520	20	101	153	DH424200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	38	10	29	32	38	45	15	23	23	10	10	26	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	○	◎	○	

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○			

DH416, DH418, DH711, DH712

DH406, DH408, DH421 SERIES with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter									
			1.0 ~ 2.9	METRIC	1.0	2.0	3.0 ~ 20.0	METRIC	3.0	-	4.0	-	5.0	6.0	-	
			-.0394 ~.0787	FRACTIONAL	-	-	1/8 ~ 3/4	FRACTIONAL	-	1/8	-	3/16	-	-	1/4	
			.0394 DECIMAL	.0394	.0787	.1181 ~.7874	DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500		
P	2	Non-alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
	3	Non-alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
	4	Non-alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
			230	RPM	22280	11140	296	RPM	9550	7160	5730	4770				
	5	Non-alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
			263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
FEED			.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
6	Low alloy steel	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
		230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
7	Low alloy steel	FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0039 - .0079	.0047 - .0094							
		230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
8	Low alloy steel	230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
		132	RPM	12730	6370	165	RPM	5310	3980	3180	2650					
9	Low alloy steel	FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.0020 - .0043	.0031 - .0055	.0039 - .0063							
		198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
10	High alloyed steel, and tool steel	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
		132	RPM	12730	6370	148	RPM	4770	3580	2860	2390					
11	High alloyed steel, and tool steel	FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.0020 - .0043	.0031 - .0055	.0039 - .0063							
		198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
M	Stainless steel	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
13	Stainless steel	148	RPM	14320	7160	181	RPM	5840	4380	3500	2920					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
K	15	Grey cast iron	263	RPM	25460	12730	362	RPM	11670	8750	7000	5840				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
	16	Grey cast iron	247	RPM	23870	11940	313	RPM	10080	7560	6050	5040				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
	17	Nodular cast iron	296	RPM	28650	14320	395	RPM	12730	9550	7640	6370				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
18	Nodular cast iron	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
19	Malleable cast iron	230	RPM	22280	11140	296	RPM	9550	7160	5730	4770					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102							
20	Malleable cast iron	198	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
H	38	Hardened steel	82	RPM	7960	3980	98	RPM	3180	2390	1910	1590				
			FEED	.0004 - .0008	.0004 - .0012	FEED	.0004 - .0012	.0004 - .0016	.0008 - .0020	.0012 - .0024						

▶ NEXT PAGE

▶ Recommend to reduce the feed rate as following

Feed 100% : DH416/DH711(3xD), DH406(3xD) Feed 80% : DH418/DH712(5xD), DH408(5xD) Feed 70% : DH421(8xD)

DH416, DH418, DH711, DH712

DH406, DH408, DH421 SERIES with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter												
			3.0 ~ 20.0	METRIC	-	8.0	-	10.0	12.0	-	14.0	-	16.0	18.0	-	20.0			
			1/8 ~ 3/4	FRACTIONAL	5/16	-	3/8	-	-	1/2	-	9/16	5/8	-	-	3/4	-		
			.1181 ~.7874	DECIMAL	.3125	.3150	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874		
P	2	Non-alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750						
			FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157							
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750						
	3	Non-alloy steel	FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157							
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750						
			FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126							
	4	Non-alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750						
			FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126							
			296	RPM	3580	2860	2390	2260	2050	1790	1590	1510	1430						
	5	Non-alloy steel	FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126							
			362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750						
FEED			.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
6	Low alloy steel	362	RPM	4380	3500	2920	2770	2500	2190	1950	1840	1750							
		FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
		296	RPM	3580	2860	2390	2260	2050	1790	1590	1510	1430							
7	Low alloy steel	FEED	.0063 - .0110	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
		296	RPM	3580	2860	2390	2260	2050	1790	1590	1510	1430							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
8	Low alloy steel	296	RPM	3580	2860	2390	2260	2050	1790	1590	1510	1430							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
		165	RPM	1990	1590	1330	1260	1140	990	880	840	800							
9	Low alloy steel	FEED	.0047 - .0071	.0051 - .0075	.0055 - .0079	.0055 - .0079	.0059 - .0083	.0063 - .0087	.0067 - .0098	.0063 - .0102	.0071 - .0110								
		263	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
10	High alloyed steel, and tool steel	263	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
		148	RPM	1790	1430	1190	1130	1020	900	800	750	720							
11	High alloyed steel, and tool steel	FEED	.0047 - .0071	.0051 - .0075	.0055 - .0079	.0055 - .0079	.0059 - .0083	.0063 - .0087	.0067 - .0098	.0063 - .0102	.0071 - .0110								
		263	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.											

DH414, DH722, DH404, DH423, DH424 SERIES

without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM				Drill Diameter									
			1.0 ~ 2.9	METRIC	1.0	2.0	3.0 ~ 20.0	METRIC	3.0	-	4.0	-	5.0	6.0	-	
			-	FRACTIONAL	-	-	1/8 ~ 3/4	FRACTIONAL	-	1/8	-	3/16	-	-	1/4	
			.0394 ~ .0787	DECIMAL	.0394	.0787	.1181 ~ .7874	DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500	
P	2	Non-alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
	3	Non-alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
			230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
	FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071								
	4	Non-alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071						
	5	Non-alloy steel	197	RPM	19100	9550	263	RPM	8490	6370	5090	4240				
FEED			.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
6	Low alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
		197	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0039 - .0079	.0047 - .0094							
7	Low alloy steel	197	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0039 - .0079	.0047 - .0094							
8	Low alloy steel	197	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
9	Low alloy steel	99	RPM	9550	4770	132	RPM	4240	3180	2550	2120					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.0020 - .0043	.0031 - .0055	.0039 - .0063							
10	High alloyed steel, and tool steel	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
11	High alloyed steel, and tool steel	99	RPM	9550	4770	132	RPM	4240	3180	2550	2120					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0012 - .0031	.002 - .0043	.0031 - .0055	.0039 - .0063							
M	Stainless steel	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
13	Stainless steel	115	RPM	11140	5570	148	RPM	4770	3580	2860	2390					
		FEED	.0008 - .0016	.0012 - .0020	FEED	.0016 - .0039	.0028 - .0051	.0039 - .0063	.0047 - .0071							
K	15	Grey cast iron	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
	16	Grey cast iron	214	RPM	20690	10350	263	RPM	8490	6370	5090	4240				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087						
	17	Nodular cast iron	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310				
			FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102						
18	Nodular cast iron	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
19	Malleable cast iron	197	RPM	19100	9550	263	RPM	8490	6370	5090	4240					
		FEED	.0016 - .0024	.0016 - .0024	FEED	.0031 - .0055	.0047 - .0071	.0059 - .0087	.0079 - .0102							
20	Malleable cast iron	165	RPM	15920	7960	230	RPM	7430	5570	4460	3710					
		FEED	.0012 - .0020	.0020 - .0028	FEED	.0024 - .0047	.0031 - .0055	.0055 - .0079	.0063 - .0087							
H	38	Hardened steel	65	RPM	6370	3180	82	RPM	2650	1990	1590	1330				
FEED	.0004 - .0008	.0004 - .0012	FEED	.0004 - .0012	.0004 - .0016	.0008 - .0020	.0012 - .0024									

▶ NEXT PAGE

▶ Recommend to reduce the feed rate as following

Feed 100% : DH414(3xD), DH404(3xD), DH423(3xD) Feed 80% : DH722(5xD), DH424(5xD)

DH414, DH722, DH404, DH423, DH424 SERIES

without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.


ISO	VDI 3323	Material Description	SFM				Drill Diameter												
			3.0 ~ 20.0	METRIC	-	8.0	-	10.0	12.0	-	14.0	-	16.0	18.0	-	20.0			
			1/8 ~ 3/4	FRACTIONAL	5/16	-	3/8	-	-	1/2	-	9/16	5/8	-	-	3/4	-		
			.1181 ~ .7874	DECIMAL	.3125	.3150	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874		
P	2	Non-alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
			FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157							
			362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
			FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157							
	3	Non-alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
			FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157							
			362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
	FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126									
	4	Non-alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
			FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126							
	5	Non-alloy steel	296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270						
FEED			.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
6	Low alloy steel	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590							
		FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
		296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0063 - .011	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
7	Low alloy steel	296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0063 - .011	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
8	Low alloy steel	296	RPM	3180	2550	2120	2010	1820	1590	1410	1340	1270							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
9	Low alloy steel	165	RPM	1590	1270	1060	1010	910	800	710	670	640							
		FEED	.0047 - .0071	.0051 - .0075	.0055 - .0079	.0055 - .0079	.0059 - .0083	.0063 - .0087	.0067 - .0098	.0067 - .0098	.0071 - .0110								
10	High alloyed steel, and tool steel	263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
11	High alloyed steel, and tool steel	148	RPM	1590	1270	1060	1010	910	800	710	670	640							
		FEED	.0047 - .0071	.0051 - .0075	.0055 - .0079	.0055 - .0079	.0059 - .0083	.0063 - .0087	.0067 - .0098	.0067 - .0098	.0071 - .0110								
M	Stainless steel	263	RPM	2790	2230	1860	1760	1590	1390	1240	1170	1110							
		FEED	.0071 - .0094	.0075 - .0106	.0083 - .0114	.0083 - .0114	.0091 - .0122	.0098 - .0130	.0110 - .0150	.0110 - .0150	.0118 - .0157								
13	Stainless steel	181	RPM	1790	1430	1190	1130	1020	900	800	750	720							
		FEED	.0055 - .0079	.0059 - .0091	.0067 - .0098	.0067 - .0098	.0071 - .0102	.0075 - .0106	.0079 - .0118	.0079 - .0118	.0087 - .0126								
K	15	Grey cast iron	362	RPM	3980	3180	2650	2510	2270	1990	1770	1680	1590						
			FEED	.0087 - .0110	.0098 - .0130	.0106 - .0138	.0106 - .0138	.0114 - .0146	.0122 - .0154										



Leading Through Innovation



Global Cutting Tool Leader **YG-1**




DREAM DRILLS

SOLID CARBIDE

DREAM DRILLS - HIGH FEED


- 1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill
for Carbon Steels, Alloy Steels(up to HRC35) and Cast Iron

DREAM DRILLS HIGH FEED

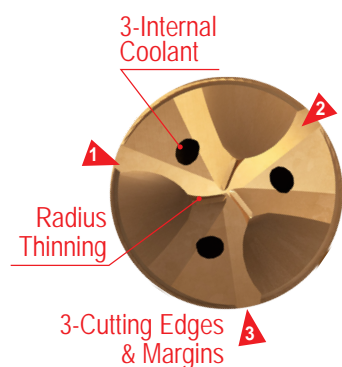

3-Cutting Edges & Margins
will allow high penetration rate,
accurate hole location and good surface finish

Radius Thinning (R-Thinning) for
Self Centering and Chip Breaking




Ground Negative land
on cutting edge for Reliable Tool Life

3-Slots
on end of shank for smooth and consistent coolant supply




H-Coating
(Upgraded AlCrN-Based : **Multi-Layer Coating**)

- Higher worn-out resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality

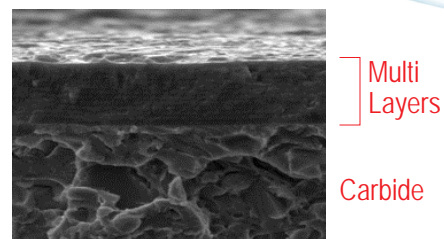

Productivity (Carbon Steel)

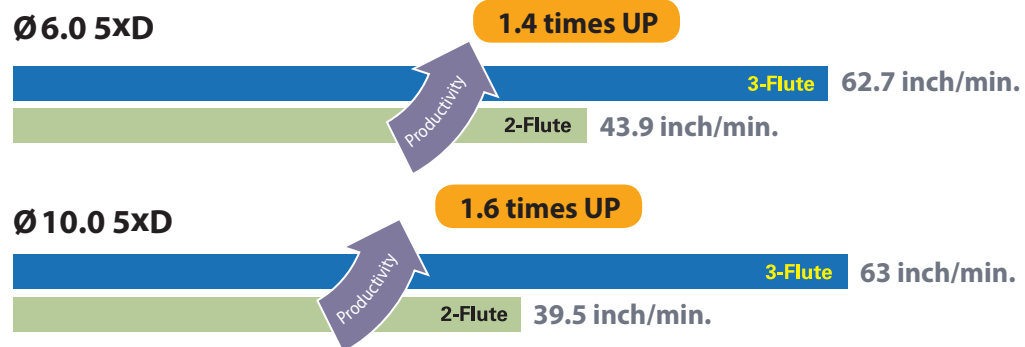


1.5 ~ 2 times Faster in drilling compared to two flute carbide drills

CASE STUDY

► SOLID CARBIDE DREAM DRILLS - High Feed with Coolant Holes

Cutting Condition


Tool	DGR495100
Size	Ø10 x Ø10 x 61 x 103
Work Material	• AISI : 1045 • JIS : S45C • DIN : C45 (HRC20)
RPM	3,200 rev./min.
Feed	.0197 inch/rev.
Drilling Depth	1.97" (5xD)
Drilling Method	Blind Hole
Coolant	Wet Cut
Machine	Machining Center

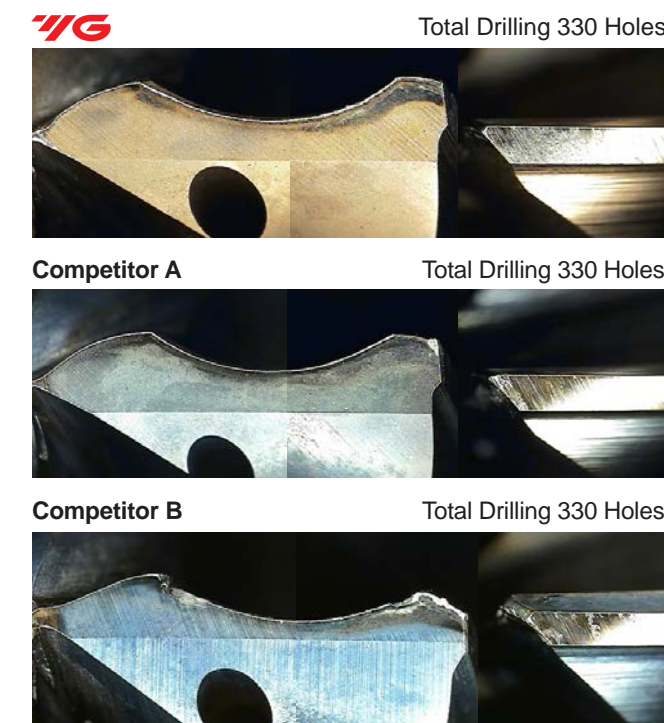


► SOLID CARBIDE DREAM DRILLS - High Feed with Coolant Holes

Cutting Condition

Tool	DGR495080
Size	Ø8 x Ø8 x 53 x 91
Work Material	Connecting rod
RPM	2,000 rev./min.
Feed	.009 inch/rev.
Drilling Depth	1.58" (5xD)
Drilling Method	Internal Cooling, Water Soluble
Coolant	Wet Cut
Machine	Machining Center

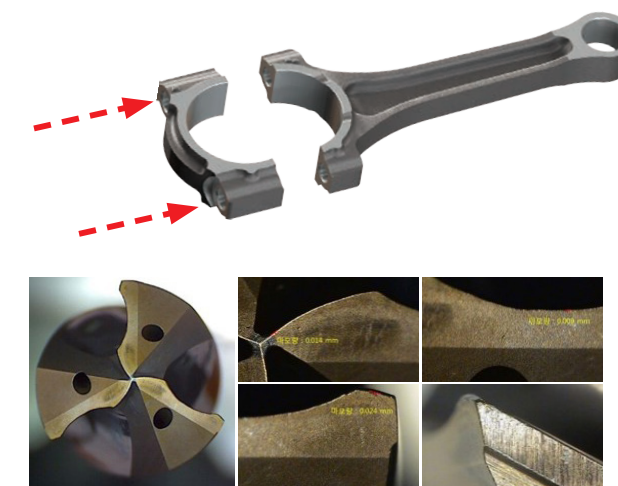

Drilling Holes

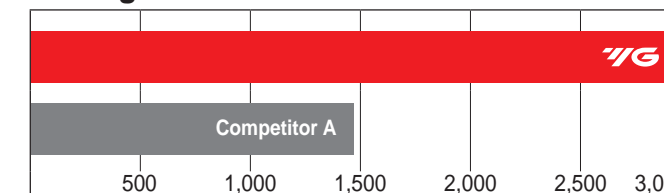




H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES DGR493 DGR496

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
▶ Multi-Layer coating delivers much better productivity and reliability
▶ Self centering and chip breaking by R-thinning and coolant holes

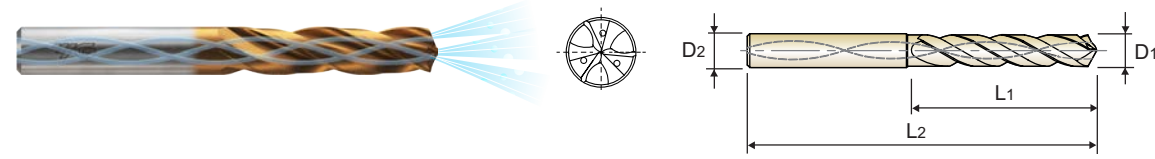

Icons for DIN 6537, CARBIDE, h6, m7, 140°, 20 bar, H Coating, and a reference to p.104.

SHORT 3 x D

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill sizes from DGR493113 to DGR493134.

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill sizes from DGR496034 to DGR496039.

▶ Other shank types are available on your request.


▶ NEXT PAGE

ISO material compatibility chart showing recommended drill types for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.

H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES DGR493 DGR496

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
▶ Multi-Layer coating delivers much better productivity and reliability
▶ Self centering and chip breaking by R-thinning and coolant holes

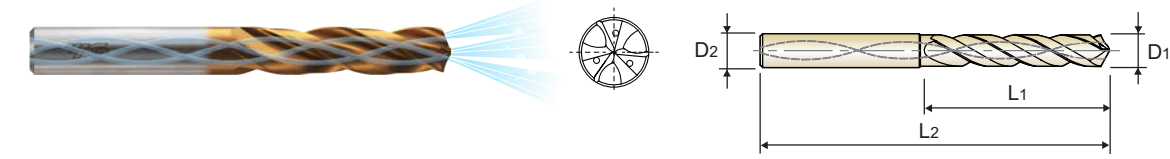

Icons for DIN 6537, CARBIDE, h6, m7, 140°, 20 bar, H Coating, and a reference to p.104.

SHORT 3 x D

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill sizes from DGR493155 to DGR493170.

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill sizes from DGR496043 to DGR493200.

▶ Other shank types are available on your request.


ISO material compatibility chart showing recommended drill types for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.



H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES
DGR495
DGR497

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

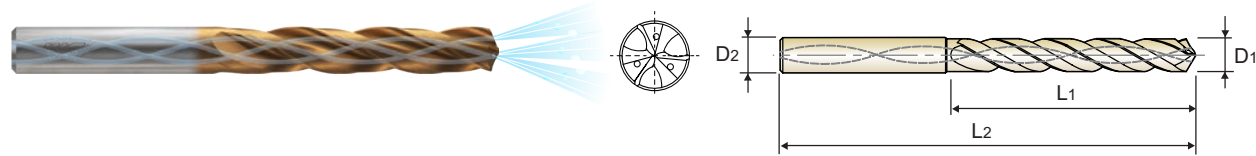

DIN 6537 CARBIDE h6 m7 140° 20 bar H Coating p.104

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal			
H-Coating						
DGR495040	4.00		.1575	6	36	74
DGR495020G	4.09	#20	.1610	6	36	74
DGR495041	4.10		.1614	6	36	74
DGR495042	4.20		.1654	6	36	74
DGR495043	4.30		.1693	6	36	74
DGR495011F	4.366	11/64	.1719	6	36	74
DGR495044	4.40		.1732	6	36	74
DGR495045	4.50		.1772	6	36	74
DGR495046	4.60		.1811	6	36	74
DGR495047	4.70		.1850	6	36	74
DGR495012F	4.763	3/16	.1875	6	44	82
DGR495048	4.80		.1890	6	44	82
DGR495049	4.90		.1929	6	44	82
DGR495050	5.00		.1969	6	44	82
DGR495051	5.10		.2008	6	44	82
DGR497013	5.16	13/64	.2031	1/4	44	82
DGR495052	5.20		.2047	6	44	82
DGR495053	5.30		.2087	6	44	82
DGR495054	5.40		.2126	6	44	82
DGR497103	5.41	#3	.2130	1/4	44	82
DGR495055	5.50		.2165	6	44	82
DGR497014	5.56	7/32	.2188	1/4	44	82
DGR495056	5.60		.2205	6	44	82
DGR497102	5.61	#2	.2210	1/4	44	82
DGR495057	5.70		.2244	6	44	82
DGR497101	5.79	#1	.2280	1/4	44	82

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal			
H-Coating						
DGR495058	5.80		.2283	6	44	82
DGR495059	5.90		.2323	6	44	82
DGR497015	5.95	15/64	.2344	1/4	44	82
DGR495060	6.00		.2362	6	44	82
DGR495061	6.10		.2402	8	53	91
DGR495062	6.20		.2441	8	53	91
DGR495063	6.30		.2480	8	53	91
DGR497016	6.35	1/4	.2500	1/4	53	91
DGR495064	6.40		.2520	8	53	91
DGR495065	6.50		.2559	8	53	91
DGR497206	6.53	F	.2570	5/16	53	91
DGR495066	6.60		.2598	8	53	91
DGR495067	6.70		.2638	8	53	91
DGR497017	6.75	17/64	.2656	5/16	53	91
DGR495068	6.80		.2677	8	53	91
DGR495069	6.90		.2717	8	53	91
DGR497209	6.91	I	.2720	5/16	53	91
DGR495070	7.00		.2756	8	53	91
DGR495071	7.10		.2795	8	53	91
DGR497018	7.14	9/32	.2813	5/16	53	91
DGR495072	7.20		.2835	8	53	91
DGR495073	7.30		.2874	8	53	91
DGR495074	7.40		.2913	8	53	91
DGR495075	7.50		.2953	8	53	91
DGR497019	7.54	19/64	.2969	5/16	53	91
DGR495076	7.60		.2992	8	53	91

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N						S				H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	55	60	42	55							
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES
DGR495
DGR497

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

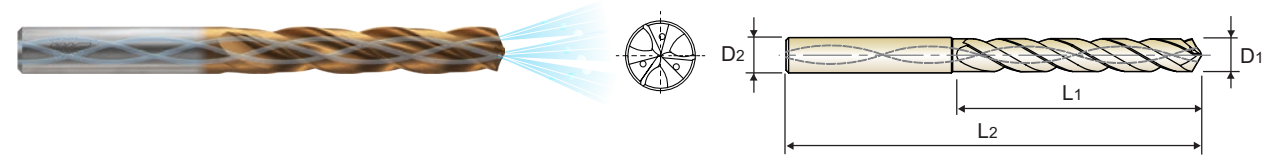

DIN 6537 CARBIDE h6 m7 140° 20 bar H Coating p.104

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal			
H-Coating						
DGR495077	7.70		.3031	8	53	91
DGR495078	7.80		.3071	8	53	91
DGR495079	7.90		.3110	8	53	91
DGR497020	7.94	5/16	.3125	5/16	53	91
DGR495080	8.00		.3150	8	53	91
DGR495081	8.10		.3189	10	61	103
DGR495082	8.20	P	.3228	10	61	103
DGR495083	8.30		.3268	10	61	103
DGR497021	8.33	21/64	.3281	3/8	61	103
DGR495084	8.40		.3307	10	61	103
DGR497217	8.43	Q	.3320	3/8	61	103
DGR495085	8.50		.3346	10	61	103
DGR495086	8.60		.3386	10	61	103
DGR495087	8.70		.3425	10	61	103
DGR497022	8.73	11/32	.3437	3/8	61	103
DGR495088	8.80		.3465	10	61	103
DGR495089	8.90		.3504	10	61	103
DGR495090	9.00		.3543	10	61	103
DGR495091	9.10		.3583	10	61	103
DGR497023	9.13	23/64	.3594	3/8	61	103
DGR495092	9.20		.3622	10	61	103
DGR495093	9.30		.3661	10	61	103
DGR497221	9.35	U	.3680	3/8	61	103
DGR495094	9.40		.3701	10	61	103
DGR495095	9.50		.3740	10	61	103
DGR497024	9.53	3/8	.3750	3/8	61	103

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal			
H-Coating						
DGR495096	9.60		.3780	10	61	103
DGR495097	9.70		.3819	10	61	103
DGR495098	9.80	W	.3858	10	61	103
DGR495099	9.90		.3898	10	61	103
DGR497025	9.92	25/64	.3906	7/16	61	103
DGR495100	10.00		.3937	10	61	103
DGR495101	10.10		.3976	12	71	118
DGR495102	10.20		.4016	12	71	118
DGR495103	10.30		.4055	12	71	118
DGR497026	10.32	13/32	.4063	7/16	71	118
DGR495104	10.40		.4094	12	71	118
DGR495105	10.50		.4134	12	71	118
DGR495106	10.60		.4173	12	71	118
DGR495107	10.70		.4213	12	71	118
DGR497027	10.72	27/64	.4219	7/16	71	118
DGR495108	10.80		.4252	12	71	118
DGR495109	10.90		.4291	12	71	118
DGR495110	11.00		.4331	12	71	118
DGR495111	11.10		.4370	12	71	118
DGR497028	11.11	7/16	.4375	7/16	71	118
DGR495112	11.20		.4409	12	71	118
DGR495113	11.30		.4449	12	71	118
DGR495114	11.40		.4488	12	71	118
DGR495115	11.50		.4528	12	71	118
DGR497029	11.51	29/64	.4531	1/2	71	118
DGR495116	11.60		.4567	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N						S				H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Heat Resistant Super Alloys		Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	55	60	42	55							
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES DGR495 DGR497

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
▶ Multi-Layer coating delivers much better productivity and reliability
▶ Self centering and chip breaking by R-thinning and coolant holes

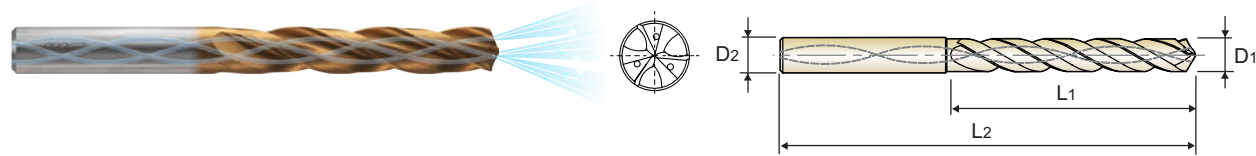

Icons for DIN 6537, CARBIDE, h6, m7, 140°, 20 bar, H Coating, and a reference to p.104.

LONG 5 x D

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

▶ Other shank types are available on your request.

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO material compatibility chart showing recommended drill bit types for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.

H-COATED SOLID CARBIDE DREAM DRILLS - HIGH FEED with COOLANT HOLES

SERIES DGR495 DGR497

- ▶ Drilling for Carbon Steels, Alloy Steels(~ HRC35) and Cast Iron
▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
▶ Multi-Layer coating delivers much better productivity and reliability
▶ Self centering and chip breaking by R-thinning and coolant holes

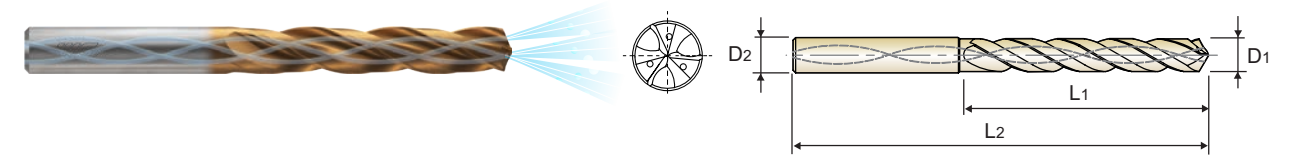

Icons for DIN 6537, CARBIDE, h6, m7, 140°, 20 bar, H Coating, and a reference to p.104.

LONG 5 x D

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

Table with 7 columns: EDP No., Drill Diameter (Metric, Inch, Decimal), Shank Diameter, Flute Length, Overall Length. Lists various drill bit models and their specifications.

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO material compatibility chart showing recommended drill bit types for various materials like Non-alloy steel, Low alloy steel, High alloyed steel, Stainless steel, etc.

DGR493, DGR496, DGR495, DGR497 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter								
				METRIC	-	5.0	6.0	-	8.0	-	10.0	12.0
				FRACTIONAL	3/16	-	-	1/4	5/16	-	3/8	-
				DECIMAL	.1875	.1969	.2362	.2500	.3125	.3150	.3750	.3937
P	2	Non-alloy steel	329	RPM	6370	5310	3980	3180	2650			
			FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0236				
			329	RPM	6370	5310	3980	3180	2650			
			FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0236				
	4	Non-alloy steel	329	RPM	6370	5310	3980	3180	2650			
			FEED	.0063 - .0083	.0079 - .0102	.0102 - .0134	.0134 - .0165	.0161 - .0185				
	5	Non-alloy steel	263	RPM	5090	4240	3180	2550	2120			
			FEED	.0063 - .0083	.0079 - .0102	.0102 - .0134	.0134 - .0165	.0161 - .0185				
	6	Low alloy steel	329	RPM	6370	5310	3980	3180	2650			
			FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0213				
			263	RPM	5090	4240	3180	2550	2120			
FEED			.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0213					
8	Low alloy steel	263	RPM	5090	4240	3180	2550	2120				
		FEED	.0063 - .0083	.0079 - .0102	.0102 - .0134	.0134 - .0165	.0161 - .0185					
9	Low alloy steel	132	RPM	2550	2120	1590	1270	1060				
		FEED	.0051 - .0071	.0063 - .0087	.0083 - .0114	.0102 - .0142	.0126 - .0150					
10	High alloyed steel, and tool steel	230	RPM	4460	3710	2790	2230	1860				
		FEED	.0063 - .0083	.0079 - .0102	.0102 - .0134	.0134 - .0165	.0161 - .0185					
11	High alloyed steel, and tool steel	132	RPM	2550	2120	1590	1270	1060				
		FEED	.0051 - .0071	.0063 - .0087	.0083 - .0114	.0102 - .0142	.0126 - .0150					
K	15	Grey cast iron	329	RPM	6370	5310	3980	3180	2650			
			FEED	.0091 - .0118	.0106 - .0142	.0142 - .0189	.0177 - .0236	.0213 - .0283				
	16	Grey cast iron	263	RPM	5090	4240	3180	2550	2120			
			FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0236				
	17	Nodular cast iron	329	RPM	6370	5310	3980	3180	2650			
			FEED	.0091 - .0118	.0106 - .0142	.0142 - .0189	.0177 - .0236	.0213 - .0283				
18	Nodular cast iron	230	RPM	4460	3710	2790	2230	1860				
		FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0236					
19	Malleable cast iron	263	RPM	5090	4240	3180	2550	2120				
		FEED	.0091 - .0118	.0106 - .0142	.0142 - .0189	.0177 - .0236	.0213 - .0283					
20	Malleable cast iron	230	RPM	4460	3710	2790	2230	1860				
		FEED	.0079 - .0098	.0094 - .0118	.0126 - .0157	.0157 - .0197	.0189 - .0236					

▶ NEXT PAGE

DGR493, DGR496, DGR495, DGR497 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.


ISO	VDI 3323	Material Description	SFM	Drill Diameter								
				METRIC	-	14.0	-	-	16.0	18.0	-	20.0
				FRACTIONAL	1/2	-	9/16	5/8	-	-	3/4	-
				DECIMAL	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874
P	2	Non-alloy steel	329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0346			
			329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0346			
	4	Non-alloy steel	329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0161 - .0185	.0185 - .0213	.0185 - .0217	.0197 - .0232	.0197 - .0232	.0213 - .0264			
	5	Non-alloy steel	263	RPM	2010	1820	1590	1410	1340	1270		
			FEED	.0161 - .0185	.0185 - .0213	.0185 - .0217	.0197 - .0232	.0197 - .0232	.0213 - .0264			
	6	Low alloy steel	329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0189 - .0213	.0220 - .0248	.0220 - .0252	.0248 - .0283	.0248 - .0283	.0268 - .0319			
			263	RPM	2010	1820	1590	1410	1340	1270		
FEED			.0189 - .0213	.0220 - .0248	.0220 - .0252	.0248 - .0283	.0248 - .0283	.0268 - .0319				
8	Low alloy steel	263	RPM	2010	1820	1590	1410	1340	1270			
		FEED	.0161 - .0185	.0185 - .0213	.0185 - .0217	.0197 - .0232	.0197 - .0232	.0213 - .0264				
9	Low alloy steel	132	RPM	1010	910	800	710	670	640			
		FEED	.0126 - .0150	.0142 - .0169	.0142 - .0177	.0150 - .0185	.0150 - .0185	.0161 - .0213				
10	High alloyed steel, and tool steel	230	RPM	1760	1590	1390	1240	1170	1110			
		FEED	.0161 - .0185	.0185 - .0213	.0185 - .0217	.0197 - .0232	.0197 - .0232	.0213 - .0264				
11	High alloyed steel, and tool steel	132	RPM	1010	910	800	710	670	640			
		FEED	.0126 - .0150	.0142 - .0169	.0142 - .0177	.0150 - .0185	.0150 - .0185	.0161 - .0213				
K	15	Grey cast iron	329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0213 - .0283	.0248 - .0331	.0252 - .0315	.0283 - .0354	.0283 - .0354	.0315 - .0386			
	16	Grey cast iron	263	RPM	2010	1820	1590	1410	1340	1270		
			FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0354			
	17	Nodular cast iron	329	RPM	2510	2270	1990	1770	1680	1590		
			FEED	.0213 - .0283	.0248 - .0331	.0252 - .0315	.0283 - .0354	.0283 - .0354	.0315 - .0386			
18	Nodular cast iron	230	RPM	1760	1590	1390	1240	1170	1110			
		FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0354				
19	Malleable cast iron	263	RPM	2010	1820	1590	1410	1340	1270			
		FEED	.0213 - .0283	.0248 - .0331	.0252 - .0315	.0283 - .0354	.0283 - .0354	.0315 - .0386				
20	Malleable cast iron	230	RPM	1760	1590	1390	1240	1170	1110			
		FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0354				




Leading Through Innovation



Global Cutting Tool Leader YG-1



DREAM DRILLS

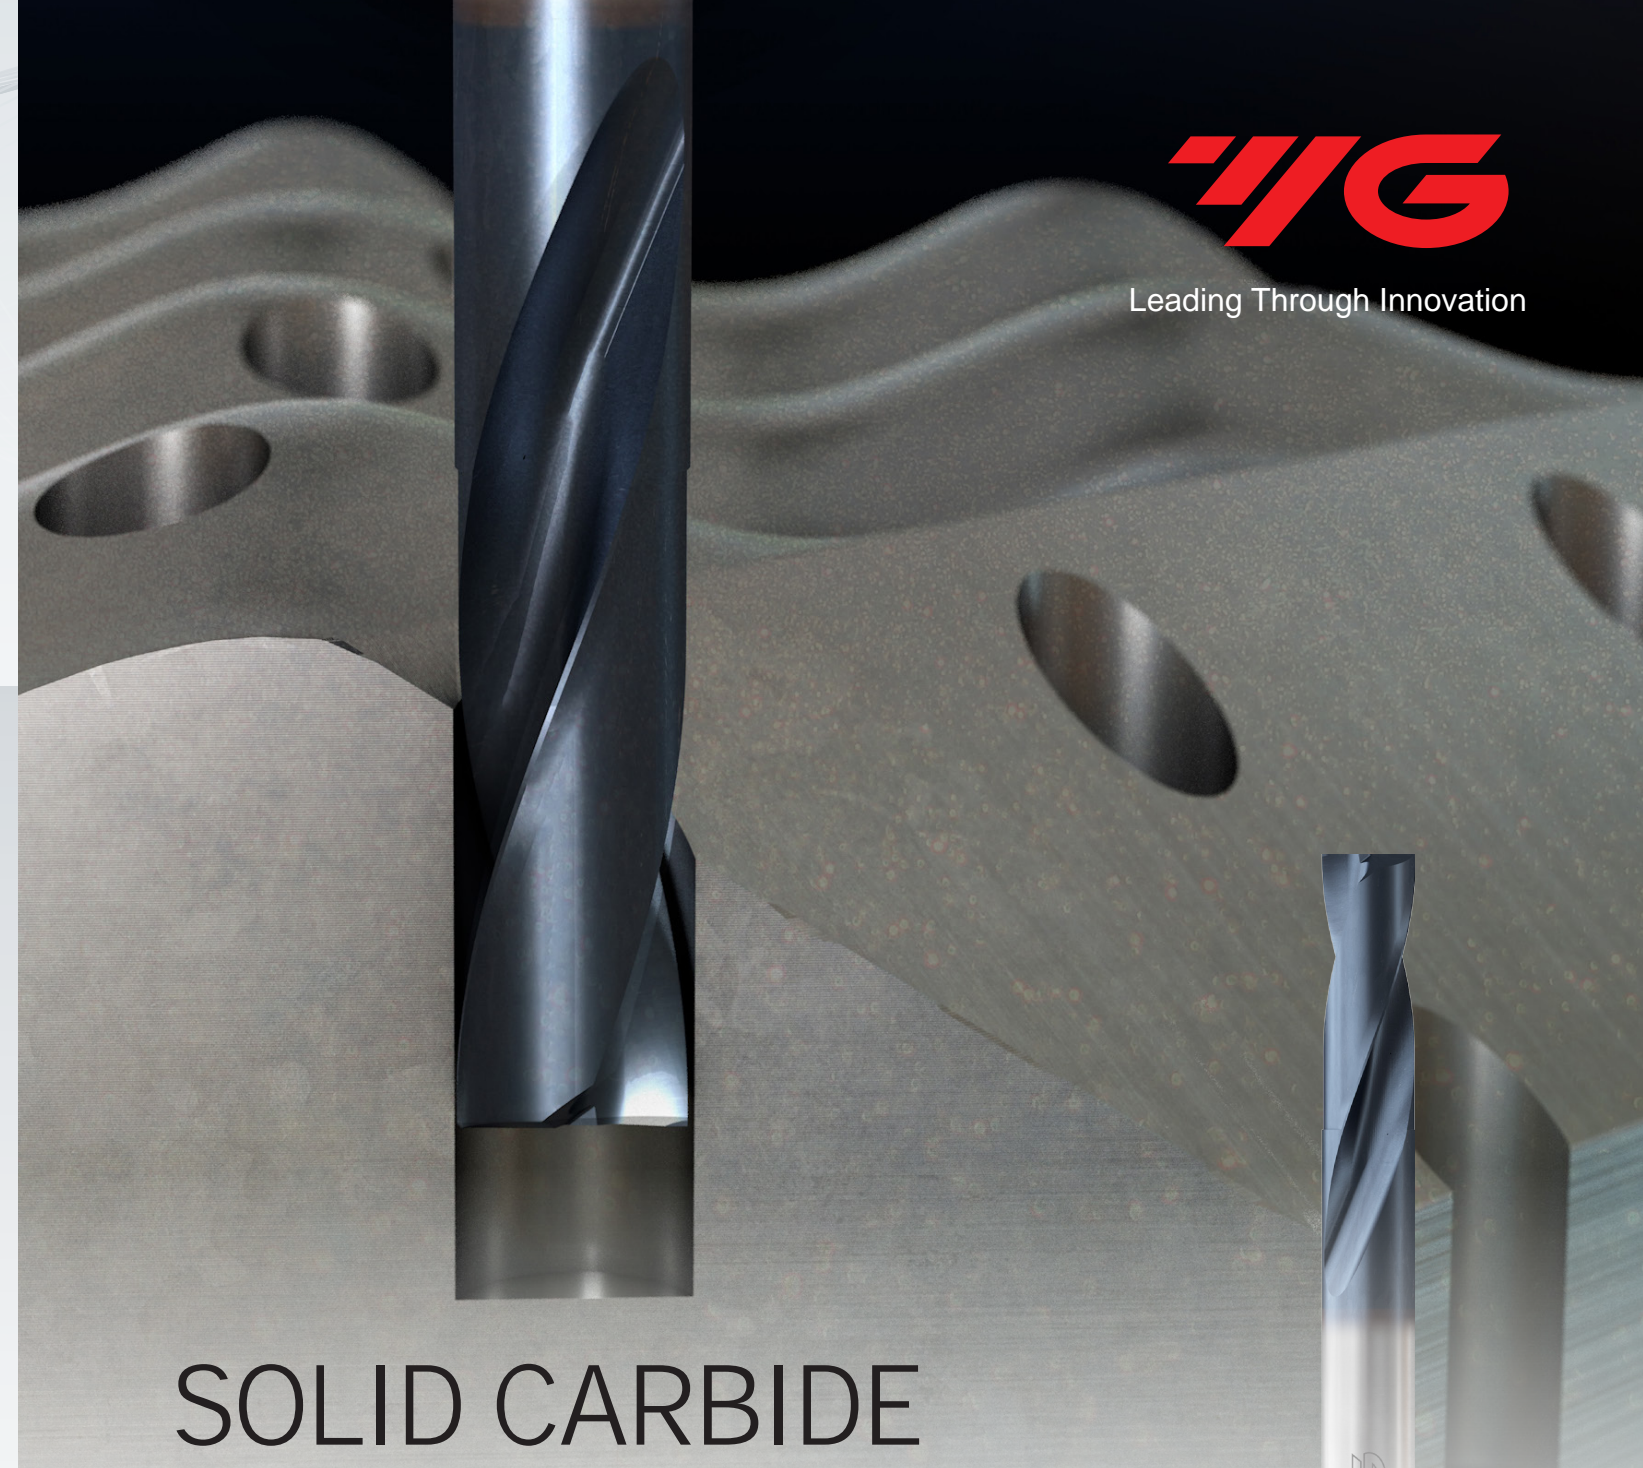

SOLID CARBIDE

DREAM DRILLS - FLAT BOTTOM

- For Holes on Various Angled Surfaces

DREAM DRILLS FLAT BOTTOM




Advantages for Flat Bottom 2xD


180 Degree Point Angle enables drilling of Horizontal Surface and Sloped Surface

Optimized flute shape for **Excellent Chip Evacuation**

High **Strength Cutting Edge** to improve tool life and versatility drilling

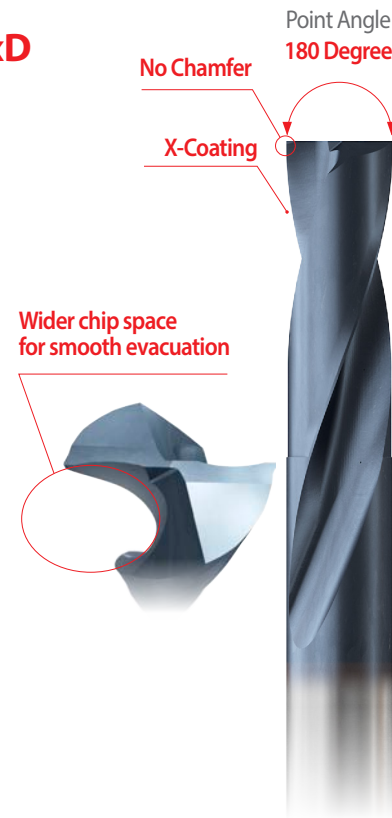

VARIETY OF DRILLING



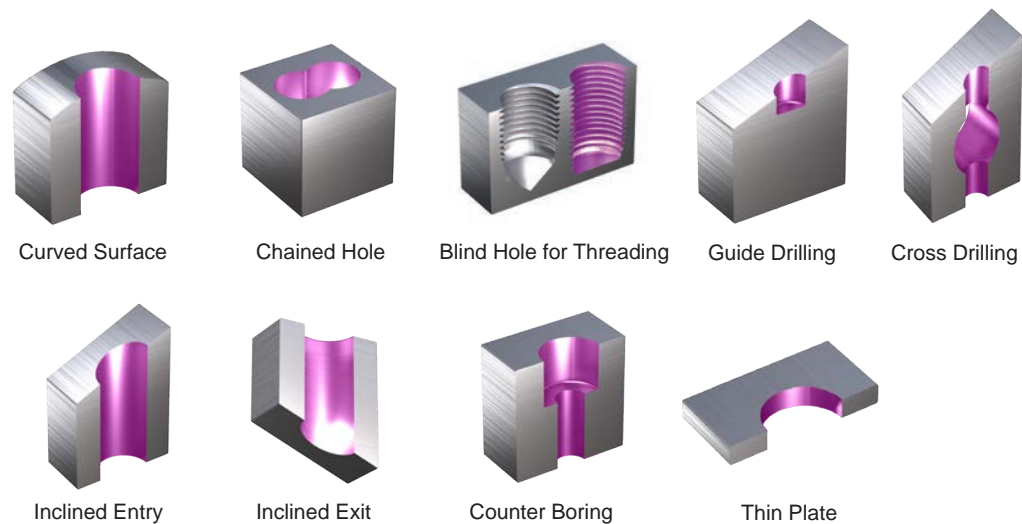


CASE STUDY

► SOLID CARBIDE DREAM DRILLS - Flat Bottom without Coolant Holes


Cutting Condition

Drill Diameter (mm)	Ø6.0 (.2362 inch)
Work Material	- AISI : 1045 - JIS : S45C - DIN : C45 (HRC20)
Cutting Speed	244.4 ft/min.
RPM	4,000 rev./min.
Feed	.0039 inch/rev.
Drilling Depth	12.0 mm (2XD) Blind Hole / without Pecking
Coolant	External Cooling Water Soluble (9% Emulsion)
Machine	Machining Center

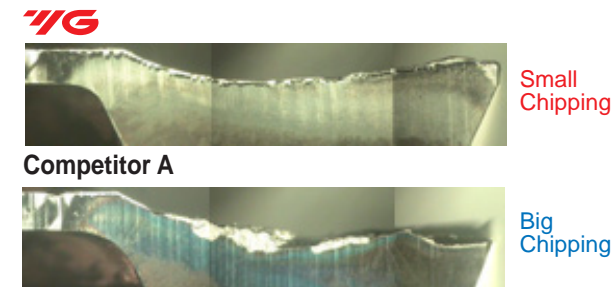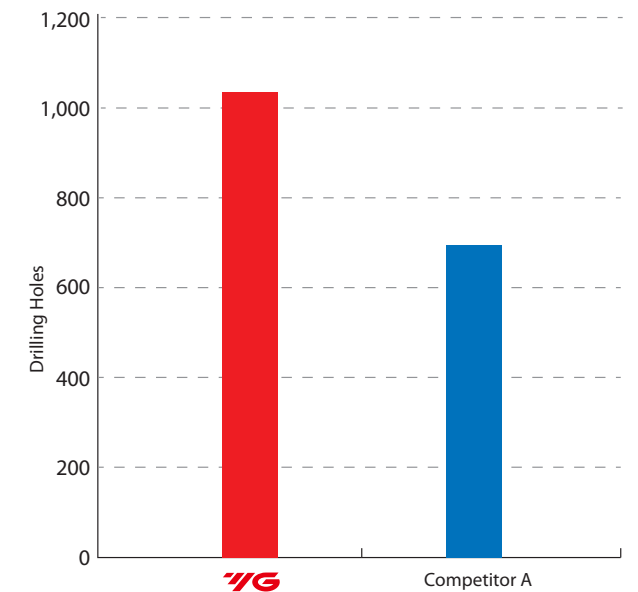

Only One Operation for Angled Surface


For angled surfaces, two operations are required to drill in a conventional Process

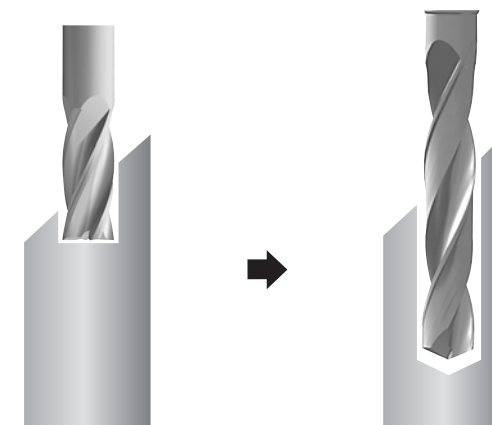

1st operation(End mill)
Counter boring to make flat surface and guide hole

2nd operation(Drill)
Drilling to required depth of hole


For angled surfaces, only one operation can complete the drilling with Dream Drill Flat Bottom



One operation(Dream Drill Flat Bottom)
One Drill does it all without using both an end mill and a drill

X-COATED SOLID CARBIDE
DREAM DRILLS - FLAT BOTTOM without COOLANT HOLES SERIES **DPP447**

- ▶ Just ONE Drill 180 degree point angle enables drilling of horizontal surface and sloped surface
- ▶ Excellent chip evacuation by optimized flute shape
- ▶ High strength cutting edge to improve tool life and versatility drilling
- ▶ Variety of drilling can be used in a variety of drilling applications

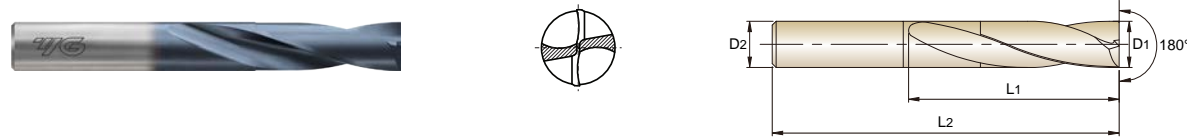

SHORT
2 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2	X-Coating	D1	D2	L1	L2
DPP447030	3.0	6	16	50	DPP447051	5.1	6	24	60
DPP447031	3.1	6	16	50	DPP447052	5.2	6	24	60
DPP447008E	1/8	6	16	50	DPP447053	5.3	6	24	60
DPP447032	3.2	6	16	50	DPP447054	5.4	6	24	60
DPP447033	3.3	6	16	50	DPP447055	5.5	6	24	60
DPP447034	3.4	6	18	50	DPP447014E	7/32	6	24	60
DPP447035	3.5	6	18	50	DPP447056	5.6	6	24	60
DPP447036	3.6	6	18	50	DPP447057	5.7	6	26	60
DPP447037	3.7	6	18	50	DPP447058	5.8	6	26	60
DPP447038	3.8	6	18	50	DPP447059	5.9	6	26	60
DPP447039	3.9	6	18	50	DPP447060	6.0	6	26	60
DPP447010E	5/32	6	18	50	DPP447061	6.1	8	28	70
DPP447040	4.0	6	18	50	DPP447062	6.2	8	28	70
DPP447041	4.1	6	20	60	DPP447063	6.3	8	28	70
DPP447042	4.2	6	20	60	DPP447016E	1/4	8	30	70
DPP447043	4.3	6	20	60	DPP447064	6.4	8	30	70
DPP447044	4.4	6	20	60	DPP447065	6.5	8	30	70
DPP447045	4.5	6	22	60	DPP447066	6.6	8	30	70
DPP447046	4.6	6	22	60	DPP447067	6.7	8	30	70
DPP447047	4.7	6	22	60	DPP447068	6.8	8	30	70
DPP447012E	3/16	6	22	60	DPP447069	6.9	8	30	70
DPP447048	4.8	6	22	60	DPP447070	7.0	8	30	70
DPP447049	4.9	6	22	60	DPP447071	7.1	8	34	70
DPP447050	5.0	6	22	60	DPP447018E	9/32	8	34	70

▶ Other shank types are available on your request.

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	35	10	29	32	38	42	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

X-COATED SOLID CARBIDE
DREAM DRILLS - FLAT BOTTOM without COOLANT HOLES SERIES **DPP447**

- ▶ Just ONE Drill 180 degree point angle enables drilling of horizontal surface and sloped surface
- ▶ Excellent chip evacuation by optimized flute shape
- ▶ High strength cutting edge to improve tool life and versatility drilling
- ▶ Variety of drilling can be used in a variety of drilling applications

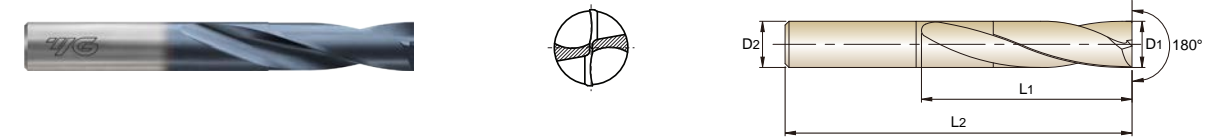

SHORT
2 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2	X-Coating	D1	D2	L1	L2
DPP447072	7.2	8	34	70	DPP447093	9.3	10	42	80
DPP447073	7.3	8	34	70	DPP447094	9.4	10	42	80
DPP447074	7.4	8	34	70	DPP447095	9.5	10	42	80
DPP447075	7.5	8	34	70	DPP447024E	3/8	10	42	80
DPP447076	7.6	8	34	70	DPP447096	9.6	10	42	80
DPP447077	7.7	8	34	70	DPP447097	9.7	10	45	80
DPP447078	7.8	8	34	70	DPP447098	9.8	10	45	80
DPP447079	7.9	8	34	70	DPP447099	9.9	10	45	80
DPP447020E	5/16	8	34	70	DPP447100	10.0	10	45	80
DPP447080	8.0	8	34	70	DPP447101	10.1	12	46	90
DPP447081	8.1	10	38	80	DPP447102	10.2	12	46	90
DPP447082	8.2	10	38	80	DPP447103	10.3	12	46	90
DPP447083	8.3	10	38	80	DPP447026E	13/32	12	46	90
DPP447021E	21/64	10	38	80	DPP447104	10.4	12	48	90
DPP447084	8.4	10	38	80	DPP447105	10.5	12	48	90
DPP447085	8.5	10	38	80	DPP447106	10.6	12	48	90
DPP447086	8.6	10	38	80	DPP447107	10.7	12	48	90
DPP447087	8.7	10	40	80	DPP447108	10.8	12	48	90
DPP447088	8.8	10	40	80	DPP447109	10.9	12	48	90
DPP447089	8.9	10	40	80	DPP447110	11.0	12	48	90
DPP447090	9.0	10	40	80	DPP447111	11.1	12	50	90
DPP447091	9.1	10	42	80	DPP447028E	7/16	12	50	90
DPP447023E	23/64	10	42	80	DPP447112	11.2	12	50	90
DPP447092	9.2	10	42	80	DPP447113	11.3	12	50	90

▶ Other shank types are available on your request.

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron			Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	35	10	29	32	38	42	15	35	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	○	○	○	◎	○	○	○	○	○

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

X-COATED SOLID CARBIDE
DREAM DRILLS - FLAT BOTTOM without COOLANT HOLES SERIES
DPP447

- ▶ Just ONE Drill 180 degree point angle enables drilling of horizontal surface and sloped surface
- ▶ Excellent chip evacuation by optimized flute shape
- ▶ High strength cutting edge to improve tool life and versatility drilling
- ▶ Variety of drilling can be used in a variety of drilling applications

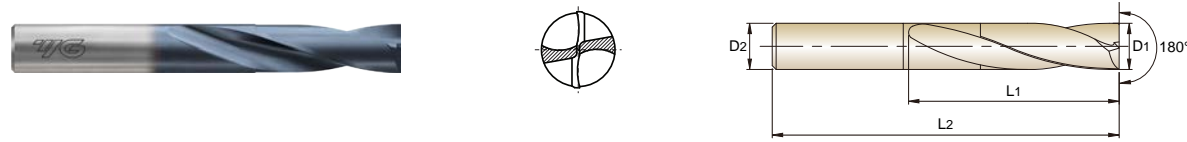

SHORT
 2 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2	X-Coating	D1	D2	L1	L2
DPP447114	11.4	12	50	90	DPP447136	13.6	14	58	100
DPP447115	11.5	12	50	90	DPP447137	13.7	14	58	100
DPP447029F	29/64	12	50	90	DPP447138	13.8	14	58	100
DPP447116	11.6	12	50	90	DPP447139	13.9	14	58	100
DPP447117	11.7	12	52	90	DPP447140	14.0	14	58	100
DPP447118	11.8	12	52	90	DPP447141	14.1	16	62	105
DPP447119	11.9	12	52	90	DPP447142	14.2	16	62	105
DPP447030F	15/32	12	52	90	DPP447036E	9/16	16	62	105
DPP447120	12.0	12	52	90	DPP447143	14.3	16	62	105
DPP447121	12.1	14	54	100	DPP447144	14.4	16	62	105
DPP447122	12.2	14	54	100	DPP447145	14.5	16	62	105
DPP447123	12.3	14	54	100	DPP447146	14.6	16	62	105
DPP447124	12.4	14	54	100	DPP447147	14.7	16	62	105
DPP447125	12.5	14	54	100	DPP447148	14.8	16	62	105
DPP447126	12.6	14	54	100	DPP447149	14.9	16	62	105
DPP447127	12.7	14	56	100	DPP447150	15.0	16	62	105
DPP447128	12.8	14	56	100	DPP447151	15.1	16	64	115
DPP447129	12.9	14	56	100	DPP447152	15.2	16	64	115
DPP447130	13.0	14	56	100	DPP447153	15.3	16	64	115
DPP447131	13.1	14	58	100	DPP447154	15.4	16	64	115
DPP447132	13.2	14	58	100	DPP447155	15.5	16	64	115
DPP447133	13.3	14	58	100	DPP447156	15.6	16	64	115
DPP447134	13.4	14	58	100	DPP447157	15.7	16	64	115
DPP447135	13.5	14	58	100	DPP447158	15.8	16	64	115

▶ Other shank types are available on your request.

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO Material Description	P									M			K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	◎	○	○	◎	○				

ISO Material Description	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

X-COATED SOLID CARBIDE
DREAM DRILLS - FLAT BOTTOM without COOLANT HOLES SERIES
DPP447

- ▶ Just ONE Drill 180 degree point angle enables drilling of horizontal surface and sloped surface
- ▶ Excellent chip evacuation by optimized flute shape
- ▶ High strength cutting edge to improve tool life and versatility drilling
- ▶ Variety of drilling can be used in a variety of drilling applications

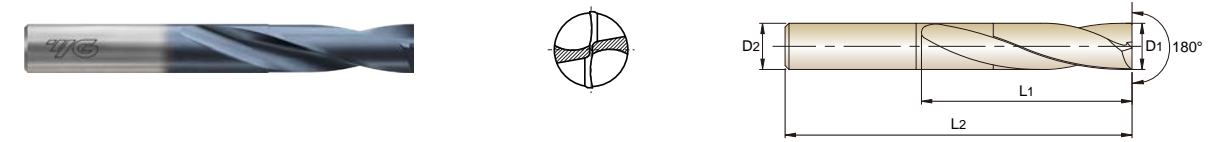

SHORT
 2 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
X-Coating	D1	D2	L1	L2	X-Coating	D1	D2	L1	L2
DPP447040E	5/8	16	64	115	DPP447180	18.0	18	70	125
DPP447159	15.9	16	64	115	DPP447185	18.5	20	75	135
DPP447160	16.0	16	64	115	DPP447190	19.0	20	75	135
DPP447165	16.5	18	70	125	DPP447048E	3/4	20	75	135
DPP447170	17.0	18	70	125	DPP447195	19.5	20	75	145
DPP447044E	11/16	18	70	125	DPP447200	20.0	20	75	145
DPP447175	17.5	18	70	125					

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO Material Description	P									M			K							
	Non-alloy steel			Low alloy steel			High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○	○	○	◎	○	○	◎	○				


ISO Material Description	N				S						H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC						15	30	25	38	34						400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

DPP447 SERIES without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter								
				METRIC	3.0	-	4.0	-	5.0	6.0	-	8.0
				FRACTIONAL	-	1/8	-	3/16	-	5/16	-	-
DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.3125	.3150				
P	1	Non-alloy steel	263	RPM	8490	6370	5090	4240	3180			
				FEED	.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0031 - .0055			
			2	RPM	8490	6370	5090	4240	3180			
	FEED			.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0031 - .0055				
	3		RPM	7430	5570	4460	3710	2790				
			FEED	.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0028 - .0051				
	4		RPM	4240	3180	2550	2120	1590				
			FEED	.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0028 - .0051				
	5		RPM	4030	3020	2420	2020	1510				
FEED		.0008 - .0020	.0008 - .0024	.0012 - .0031	.0012 - .0035	.0024 - .0047						
6	Low alloy steel	148	RPM	4770	3580	2860	2390	1790				
			FEED	.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0028 - .0051				
		7	RPM	4240	3180	2550	2120	1590				
FEED			.0008 - .0020	.0012 - .0028	.0012 - .0031	.0016 - .0039	.0028 - .0051					
8		RPM	4030	3020	2420	2020	1510					
		FEED	.0008 - .0020	.0008 - .0024	.0012 - .0031	.0012 - .0035	.0024 - .0047					
9		RPM	2650	1990	1590	1330	990					
		FEED	.0004 - .0012	.0008 - .0016	.0008 - .0020	.0012 - .0024	.0012 - .0031					
M		12	Stainless steel	99	RPM	3180	2390	1910	1590	1190		
				FEED	.0004 - .0012	.0004 - .0012	.0008 - .0016	.0008 - .002	.0012 - .0024			
K	15	Grey cast iron	230	RPM	7430	5570	4460	3710	2790			
				FEED	.0008 - .0020	.0008 - .0024	.0012 - .0031	.0012 - .0035	.0024 - .0047			
16	RPM		6370	4770	3820	3180	2390					
	FEED		.0008 - .0020	.0008 - .0020	.0012 - .0024	.0012 - .0028	.0016 - .0039					
N	21	Aluminum-wrought alloy	543	RPM	17510	13130	10500	8750	6570			
				FEED	.0008 - .0020	.0016 - .0031	.0016 - .0039	.0024 - .0047	.0039 - .0063			
22	RPM		17510	13130	10500	8750	6570					
	FEED		.0008 - .0020	.0016 - .0031	.0016 - .0039	.0024 - .0047	.0039 - .0063					

▶ NEXT PAGE

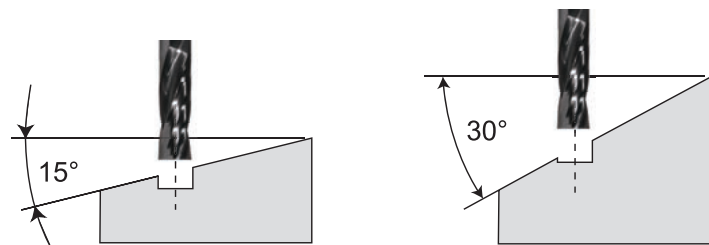

Surface Angle	Cutting Conditions	
	RPM	FEED
0° ~ 15°	100%	100%
15° ~ 30°	100%	50%
30° ~	70%	30%

DPP447 SERIES without COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter								
				METRIC	-	10.0	12.0	-	-	16.0	-	20.0
				FRACTIONAL	3/8	-	-	1/2	5/8	-	3/4	-
DECIMAL	.3750	.3937	.4724	.5000	.6250	.6299	.7500	.7874				
P	1	Non-alloy steel	263	RPM	2550	2120	2010	1590	1340	1270		
				FEED	.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0104 - .0144	.0110 - .0150		
			2	RPM	2550	2120	2010	1590	1340	1270		
	FEED			.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0104 - .0144	.0110 - .0150			
	3		RPM	2230	1860	1760	1390	1170	1110			
			FEED	.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0088 - .0128	.0094 - .0134			
	4		RPM	1270	1060	1010	800	670	640			
			FEED	.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0088 - .0128	.0094 - .0134			
	5		RPM	1210	1010	960	760	640	600			
FEED		.0035 - .0059	.0031 - .0071	.0031 - .0071	.0055 - .0094	.0077 - .0117	.0083 - .0122					
6	Low alloy steel	148	RPM	1430	1190	1130	900	750	720			
			FEED	.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0088 - .0128	.0094 - .0134			
		7	RPM	1270	1060	1010	800	670	640			
FEED			.0043 - .0067	.0043 - .0083	.0043 - .0083	.0071 - .0110	.0088 - .0128	.0094 - .0134				
8		RPM	1210	1010	960	760	640	600				
		FEED	.0035 - .0059	.0031 - .0071	.0031 - .0071	.0055 - .0094	.0077 - .0117	.0083 - .0122				
9		RPM	800	660	630	500	420	400				
		FEED	.0020 - .0039	.0024 - .0047	.0024 - .0047	.0024 - .0063	.0025 - .0065	.0039 - .0079				
M		12	Stainless steel	99	RPM	950	800	760	600	500	480	
				FEED	.0012 - .0031	.0020 - .0039	.0020 - .0039	.0024 - .0047	.0025 - .0065	.0035 - .0059		
K	15	Grey cast iron	230	RPM	2010	1820	1590	1410	1340	1270		
				FEED	.0189 - .0236	.0220 - .0276	.0220 - .0283	.0248 - .0319	.0248 - .0319	.0276 - .0354		
16	RPM		2510	2270	1990	1770	1680	1590				
	FEED		.0213 - .0283	.0248 - .0331	.0252 - .0315	.0283 - .0354	.0283 - .0354	.0315 - .0386				
N	21	Aluminum-wrought alloy	543	RPM	5250	4380	4150	3280	2770	2630		
				FEED	.0055 - .0079	.0055 - .0094	.0055 - .0094	.0087 - .0126	.0111 - .0151	.0118 - .0157		
22	RPM		5250	4380	4150	3280	2770	2630				
	FEED		.0055 - .0079	.0055 - .0094	.0055 - .0094	.0087 - .0126	.0111 - .0151	.0118 - .0157				


- ▶ The cutting conditions are for 2xD.
- ▶ The rigid and precise machine and holder are required.
- ▶ The recommended depth of hole is measured from the highest point of the hole on drilling in inclined and angled surfaces.
- ▶ The recommended cutting conditions are those for drilling on flat and horizontal surfaces.
- ▶ Please adjust feed rate according to the above surface angle when drilling on an inclined surface.
 - The recommended feed rate 50% or lower, in case of 15°~30° of the incline angle.
 - The recommended feed rate 30% or lower and RPM 70%, in case of 30° ~ of the incline angle.
- ▶ Please decrease cutting speed as material hardness increases.
- ▶ Only use drilling tool. Side milling, traversing, helical milling are not usable.



Leading Through Innovation



Global Cutting Tool Leader **YG-1**



DREAM DRILLS




SOLID CARBIDE

DREAM DRILLS - INOX


- For Tough Materials like Stainless Steels, Nickel Alloys and Titanium

DREAM DRILLS INOX

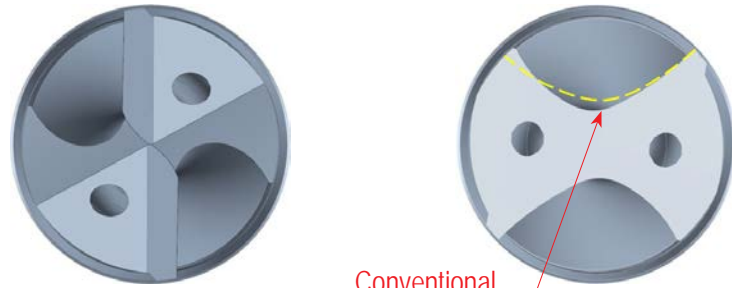


Conventional

- Special Flute geometry and Chip pocket to help Chip evacuation and proper Chip Curl.
- strong rigidity from **Cutting Edge**
- high Performance on Stainless Steel and pre hardend Steel



Radius Thinning (R-Thinning)

- Positive Axial **Rake Angle** and cutting force, with **R-Thinning** enhance centering and Chip Breaking.

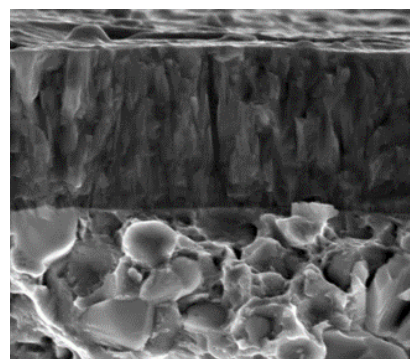

Nano Layer
Carbide

TiAlN Coating (Upgraded Titanium Aluminum Nitride : Nano-Layer Coating)

- Higher wear resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality



Special surface treatment after coating to reduce friction and better chip flow.

CASE STUDY

► SOLID CARBIDE DREAM DRILLS - INOX with Coolant Holes

Cutting Condition


Tool	DH452060
Size	Ø6 × Ø6 × 44 × 82
Work Material	- AISI : 304 - DIN : X5CrNi1810 (X4CrNi18-10)(HRC10) - JIS : SUS304
RPM	14,856 rev./min.
SFM	.229 ft/min.
Feed	.0028 inch/rev.
Drilling Depth	.94" (4xD)
Coolant	Wet Cut

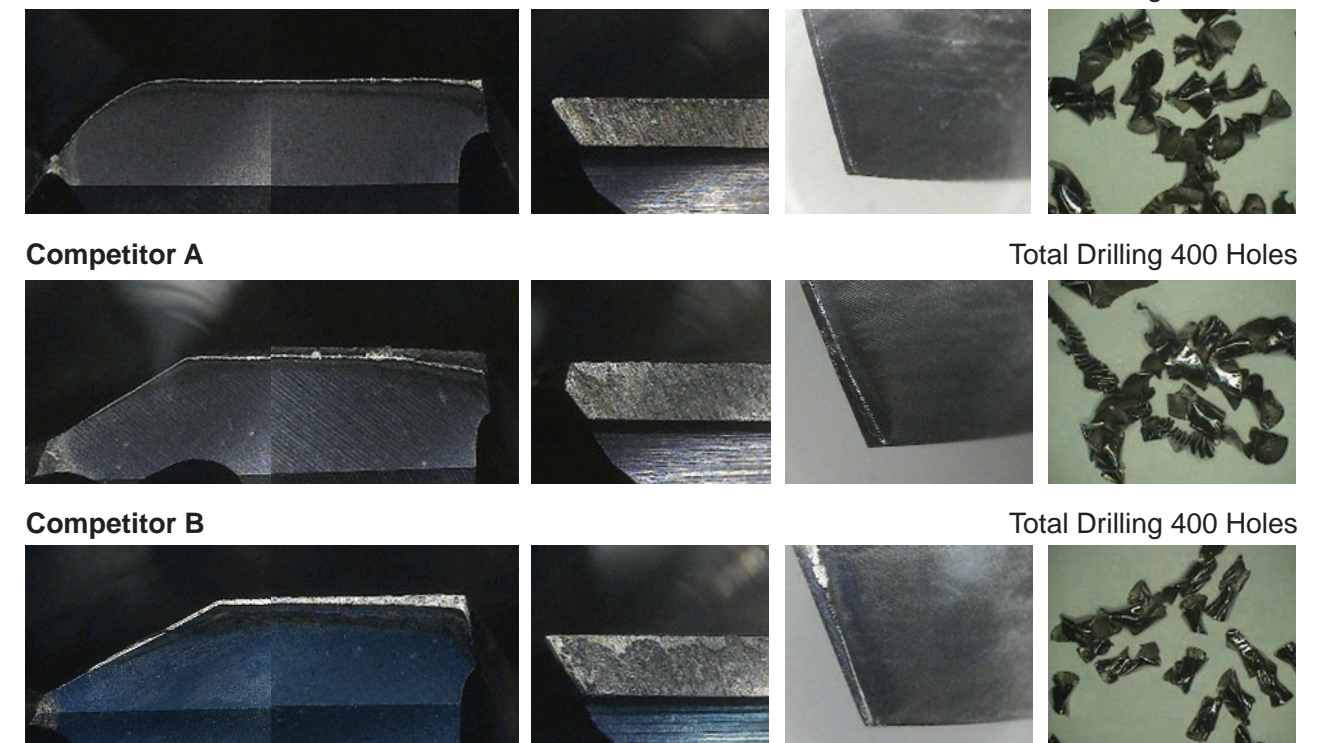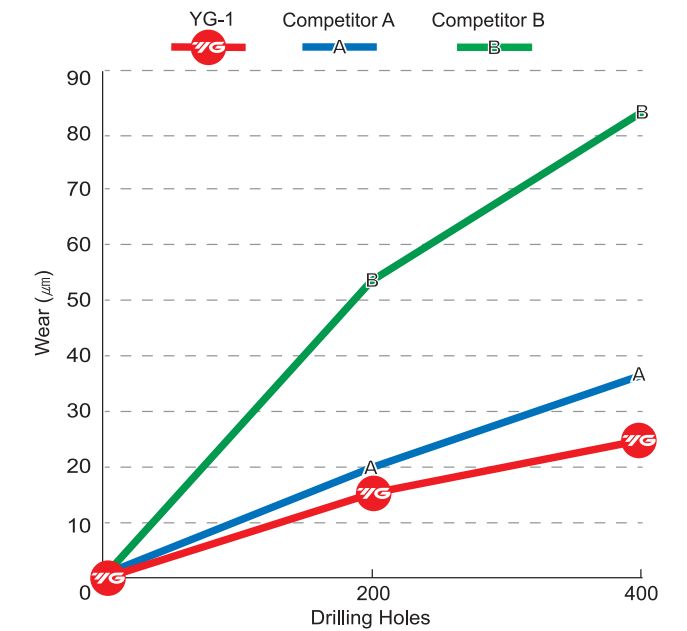

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES
DH463
DH714

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

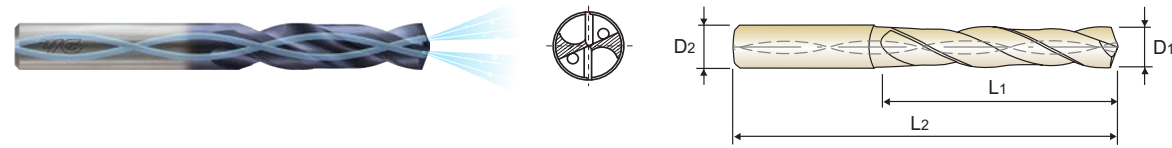

p.136

STUB
3 x D

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAIN	D1		D2	L1	L2
DH714008	1/8	.1250	3/16	1.102	2.992
DH463008	1/8	.1250	15/64	1.102	2.992
DH714011	11/64	.1719	3/16	1.417	3.386
DH463011	11/64	.1719	15/64	1.417	3.386
DH714012	3/16	.1875	3/16	1.575	3.543
DH463012	3/16	.1875	15/64	1.575	3.543
DH463013	13/64	.2031	15/64	1.082	3.228
DH714013	13/64	.2031	1/4	1.082	3.228
DH463014	7/32	.2188	15/64	1.181	3.228
DH714014	7/32	.2188	1/4	1.181	3.228
DH463015	15/64	.2344	15/64	1.181	3.228
DH714015	15/64	.2344	1/4	1.181	3.228
DH714016	1/4	.2500	1/4	1.279	3.465
DH463016	1/4	.2500	17/64	1.279	3.465
DH463206	F	.2570	17/64	1.279	3.465
DH714206	F	.2570	5/16	1.279	3.465
DH463017	17/64	.2656	17/64	1.378	3.465
DH714017	17/64	.2656	5/16	1.378	3.465
DH463209	I	.2720	.2720	1.378	3.465
DH714209	I	.2720	5/16	1.378	3.465
DH463018	9/32	.2812	5/16	1.476	3.701
DH463019	19/64	.2969	5/16	1.476	3.701
DH463020	5/16	.3125	5/16	1.575	3.701
DH463021	21/64	.3281	11/32	1.673	3.937

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES
DH463
DH714

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

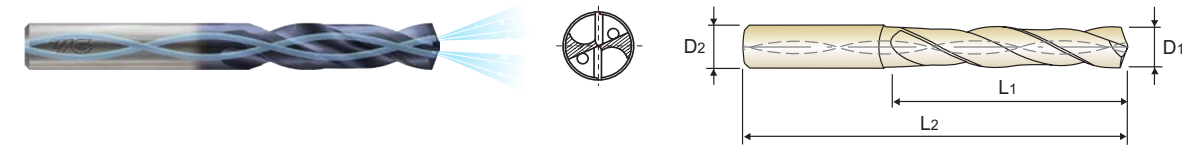

p.136

STUB
3 x D

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAIN	D1		D2	L1	L2
DH463032	1/2	.5000	1/2	2.559	5.039
DH463033	33/64	.5156	35/64	2.657	5.276
DH714033	33/64	.5156	9/16	2.657	5.276
DH463034	17/32	.5312	35/64	2.756	5.276
DH714034	17/32	.5312	9/16	2.756	5.276
DH463035	35/64	.5469	35/64	2.756	5.276
DH714035	35/64	.5469	9/16	2.756	5.276

▶ Other shank types are available on your request.

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAIN	D1		D2	L1	L2
DH714036	9/16	.5625	9/16	2.854	5.512
DH463036	9/16	.5625	37/64	2.854	5.512
DH463037	37/64	.5781	37/64	2.953	5.512
DH714037	37/64	.5781	5/8	2.953	5.512
DH463038	19/32	.5937	5/8	3.051	5.709
DH463039	39/64	.6094	5/8	3.051	5.709
DH463040	5/8	.6250	5/8	3.150	5.709

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES
DH464
DH715

- Special flute shape and geometry suitable for machining stainless steel
- Excellent chip evacuation from better surface treatment
- Point R-thinning achieves superior centering and chip curling
- TiAIN coating for better surface finishes and longer tool life

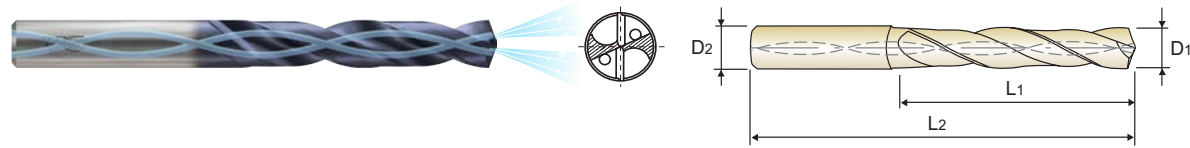

LONG
5 × D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
TiAIN	D1		D2	L1	L2	TiAIN	D1		D2	L1	L2
DH464013	13/64	.2031	15/64	1-3/4	3-15/16	DH715022	11/32	.3438	3/8	2-27/32	5
DH715013	13/64	.2031	1/4	1-3/4	3-15/16	DH715023	23/64	.3594	3/8	3	5-23/64
DH464014	7/32	.2188	15/64	1-57/64	3-15/16	DH464023	23/64	.3594	25/64	3	5-23/64
DH715014	7/32	.2188	1/4	1-57/64	3-15/16	DH715221	U	.3680	3/8	3	5-23/64
DH464015	15/64	.2344	15/64	1-57/64	3-15/16	DH464221	U	.3680	25/64	3	5-23/64
DH715015	15/64	.2344	1/4	1-57/64	3-15/16	DH715024	3/8	.3750	3/8	3-5/32	5-23/64
DH715016	1/4	.2500	1/4	2-3/64	4-19/64	DH464024	3/8	.3750	25/64	3-5/32	5-23/64
DH464016	1/4	.2500	17/64	2-3/64	4-19/64	DH464025	25/64	.3906	25/64	3-5/32	5-23/64
DH464206	F	.2570	17/64	2-13/64	4-19/64	DH715025	25/64	.3906	7/16	3-5/32	5-23/64
DH715206	F	.2570	5/16	2-13/64	4-19/64	DH464026	13/32	.4062	27/64	3-5/16	5-7/8
DH464017	17/64	.2656	17/64	2-13/64	4-19/64	DH715026	13/32	.4062	7/16	3-5/16	5-7/8
DH715017	17/64	.2656	5/16	2-13/64	4-19/64	DH464027	27/64	.4219	27/64	3-15/32	5-7/8
DH464209	I	.2720	.2720	2-13/64	4-19/64	DH715027	27/64	.4219	7/16	3-15/32	5-7/8
DH715209	I	.2720	5/16	2-13/64	4-19/64	DH715028	7/16	.4375	7/16	3-5/8	6-7/32
DH464018	9/32	.2812	5/16	2-23/64	4-41/64	DH464028	7/16	.4375	15/32	3-5/8	6-7/32
DH464019	19/64	.2969	5/16	2-33/64	4-41/64	DH464029	29/64	.4531	15/32	3-25/32	6-7/32
DH464020	5/16	.3125	5/16	2-33/64	4-41/64	DH715029	29/64	.4531	1/2	3-25/32	6-7/32
DH464021	21/64	.3281	11/32	2-43/64	5	DH464030	15/32	.4688	15/32	3-25/32	6-7/32
DH715021	21/64	.3281	3/8	2-43/64	5	DH715030	15/32	.4688	1/2	3-25/32	6-7/32
DH464217	Q	.3320	11/32	2-43/64	5	DH464031	31/64	.4844	1/2	3-15/16	6-37/64
DH715217	Q	.3320	3/8	2-43/64	5	DH464032	1/2	.5000	1/2	4-3/32	6-37/64
DH464022	11/32	.3438	11/32	2-27/32	5						

► Other shank types are available on your request.

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES
DH451

- Special flute shape and geometry suitable for machining stainless steel
- Excellent chip evacuation from better surface treatment
- Point R-thinning achieves superior centering and chip curling
- TiAIN coating for better surface finishes and longer tool life

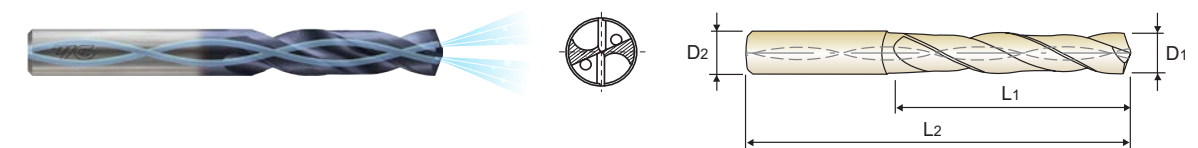

SHORT
3 × D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH451021	2.1		.0827	4	20	55	DH451047	4.7		.1850	6	24	66
DH451006E	2.381	3/32	.0937	4	20	55	DH451012E	4.763	3/16	.1875	6	24	66
DH451027	2.7		.1063	4	20	55	DH451048	4.8		.1890	6	28	66
DH451007F	2.778	7/64	.1094	4	20	55	DH451049	4.9		.1929	6	28	66
DH451929	2.95		.1161	6	20	62	DH451050	5.0		.1969	6	28	66
DH451030	3.0		.1181	6	20	62	DH451051	5.1		.2008	6	28	66
DH451031	3.1		.1220	6	20	62	DH451013E	5.159	13/64	.2031	6	28	66
DH451008E	3.175	1/8	.1250	6	20	62	DH451052	5.2		.2047	6	28	66
DH451032	3.2		.1260	6	20	62	DH451053	5.3		.2087	6	28	66
DH451033	3.3		.1299	6	20	62	DH451054	5.4		.2126	6	28	66
DH451034	3.4		.1339	6	20	62	DH451055	5.5		.2165	6	28	66
DH451035	3.5		.1378	6	20	62	DH451014E	5.556	7/32	.2188	6	28	66
DH451009E	3.572	9/64	.1406	6	20	62	DH451056	5.6		.2205	6	28	66
DH451036	3.6		.1417	6	20	62	DH451057	5.7		.2244	6	28	66
DH451037	3.7		.1457	6	20	62	DH451058	5.8		.2283	6	28	66
DH451038	3.8		.1496	6	24	66	DH451059	5.9		.2323	6	28	66
DH451039	3.9		.1535	6	24	66	DH451015E	5.953	15/64	.2344	6	28	66
DH451010E	3.969	5/32	.1563	6	24	66	DH451060	6.0		.2362	6	28	66
DH451040	4.0		.1575	6	24	66	DH451061	6.1		.2402	8	34	79
DH451041	4.1		.1614	6	24	66	DH451062	6.2		.2441	8	34	79
DH451042	4.2		.1654	6	24	66	DH451063	6.3		.2480	8	34	79
DH451043	4.3		.1693	6	24	66	DH451016E	6.350	1/4	.2500	8	34	79
DH451011E	4.366	11/64	.1719	6	24	66	DH451064	6.4		.2520	8	34	79
DH451044	4.4		.1732	6	24	66	DH451065	6.5		.2559	8	34	79
DH451045	4.5		.1772	6	24	66	DH451006L	6.528	F	.2570	8	34	79
DH451046	4.6		.1811	6	24	66	DH451066	6.6		.2598	8	34	79

► Other shank types are available on your request.

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH451

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

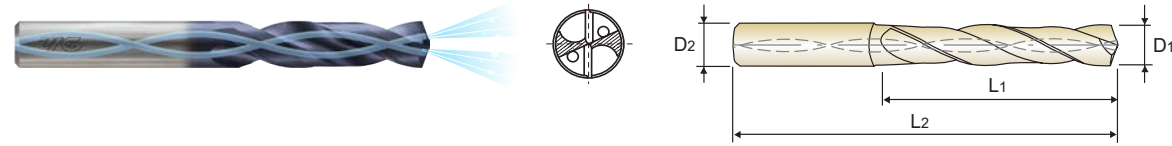

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

SHORT
3 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH451067	6.7		.2638	8	34	79	DH451086	8.6		.3386	10	47	89
DH451017E	6.747	17/64	.2656	8	34	79	DH451087	8.7		.3425	10	47	89
DH451068	6.8		.2677	8	34	79	DH451022E	8.731	11/32	.3438	10	47	89
DH451069	6.9		.2717	8	34	79	DH451088	8.8		.3465	10	47	89
DH451009L	6.909	I	.2720	8	34	79	DH451089	8.9		.3504	10	47	89
DH451070	7.0		.2756	8	34	79	DH451090	9.0		.3543	10	47	89
DH451071	7.1		.2795	8	41	79	DH451091	9.1		.3583	10	47	89
DH451018E	7.144	9/32	.2812	8	41	79	DH451023E	9.128	23/64	.3594	10	47	89
DH451072	7.2		.2835	8	41	79	DH451092	9.2		.3622	10	47	89
DH451073	7.3		.2874	8	41	79	DH451093	9.3		.3661	10	47	89
DH451074	7.4		.2913	8	41	79	DH451021L	9.347	U	.3680	10	47	89
DH451075	7.5		.2953	8	41	79	DH451094	9.4		.3701	10	47	89
DH451019E	7.541	19/64	.2969	8	41	79	DH451095	9.5		.3740	10	47	89
DH451076	7.6		.2992	8	41	79	DH451024E	9.525	3/8	.3750	10	47	89
DH451077	7.7		.3031	8	41	79	DH451096	9.6		.3780	10	47	89
DH451078	7.8		.3071	8	41	79	DH451097	9.7		.3819	10	47	89
DH451079	7.9		.3110	8	41	79	DH451098	9.8		.3858	10	47	89
DH451020E	7.938	5/16	.3125	8	41	79	DH451099	9.9		.3898	10	47	89
DH451080	8.0		.3150	8	41	79	DH451025E	9.922	25/64	.3906	10	47	89
DH451081	8.1		.3189	10	47	89	DH451100	10.0		.3937	10	47	89
DH451082	8.2		.3228	10	47	89	DH451101	10.1		.3976	12	55	102
DH451083	8.3		.3268	10	47	89	DH451102	10.2		.4016	12	55	102
DH451021E	8.334	21/64	.3281	10	47	89	DH451103	10.3		.4055	12	55	102
DH451084	8.4		.3307	10	47	89	DH451026E	10.319	13/32	.4062	12	55	102
DH451017L	8.433	Q	.3320	10	47	89	DH451104	10.4		.4094	12	55	102
DH451085	8.5		.3346	10	47	89	DH451105	10.5		.4134	12	55	102

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH451

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

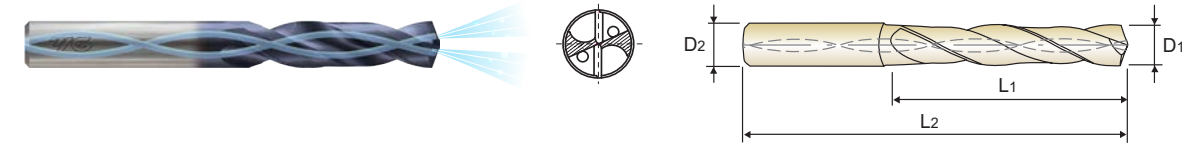

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

SHORT
3 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH451106	10.6		.4173	12	55	102	DH451032E	12.7	1/2	.5000	14	60	107
DH451107	10.7		.4212	12	55	102	DH451128	12.8		.5039	14	60	107
DH451027E	10.716	27/64	.4219	12	55	102	DH451129	12.9		.5079	14	60	107
DH451108	10.8		.4252	12	55	102	DH451130	13.0		.5118	14	60	107
DH451109	10.9		.4291	12	55	102	DH451131	13.1		.5157	14	60	107
DH451110	11.0		.4330	12	55	102	DH451132	13.2		.5197	14	60	107
DH451111	11.1		.4370	12	55	102	DH451133	13.3		.5236	14	60	107
DH451028E	11.113	7/16	.4375	12	55	102	DH451134	13.4		.5276	14	60	107
DH451112	11.2		.4409	12	55	102	DH451135	13.5		.5314	14	60	107
DH451113	11.3		.4448	12	55	102	DH451136	13.6		.5354	14	60	107
DH451114	11.4		.4488	12	55	102	DH451137	13.7		.5394	14	60	107
DH451115	11.5		.4527	12	55	102	DH451138	13.8		.5433	14	60	107
DH451029E	11.509	29/64	.4531	12	55	102	DH451139	13.9		.5472	14	60	107
DH451116	11.6		.4566	12	55	102	DH451140	14.0		.5512	14	60	107
DH451117	11.7		.4606	12	55	102	DH451141	14.1		.5551	16	65	115
DH451118	11.8		.4645	12	55	102	DH451142	14.2		.5591	16	65	115
DH451119	11.9		.4685	12	55	102	DH451036E	14.288	9/16	.5625	16	65	115
DH451030E	11.906	15/32	.4688	12	55	102	DH451143	14.3		.5630	16	65	115
DH451120	12.0		.4724	12	55	102	DH451144	14.4		.5669	16	65	115
DH451121	12.1		.4764	14	60	107	DH451145	14.5		.5708	16	65	115
DH451122	12.2		.4803	14	60	107	DH451146	14.6		.5748	16	65	115
DH451123	12.3		.4843	14	60	107	DH451147	14.7		.5787	16	65	115
DH451031E	12.303	31/64	.4844	14	60	107	DH451148	14.8		.5827	16	65	115
DH451124	12.4		.4882	14	60	107	DH451149	14.9		.5866	16	65	115
DH451125	12.5		.4921	14	60	107	DH451150	15.0		.5905	16	65	115
DH451126	12.6		.4961	14	60	107	DH451151	15.1		.5945	16	65	115

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34							

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH452

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

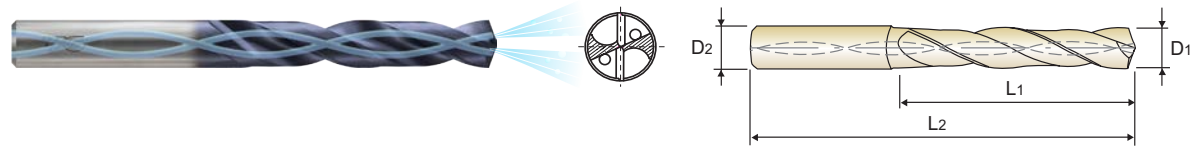

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH452134	13.4		.5276	14	77	124	DH452040E	15.875	5/8	.6250	16	83	133
DH452135	13.5		.5314	14	77	124	DH452159	15.9		.6260	16	83	133
DH452136	13.6		.5354	14	77	124	DH452160	16.0		.6299	16	83	133
DH452137	13.7		.5394	14	77	124	DH452161	16.1		.6339	18	93	143
DH452138	13.8		.5433	14	77	124	DH452162	16.2		.6378	18	93	143
DH452139	13.9		.5472	14	77	124	DH452163	16.3		.6417	18	93	143
DH452140	14.0		.5512	14	77	124	DH452164	16.4		.6457	18	93	143
DH452141	14.1		.5551	16	83	133	DH452165	16.5		.6495	18	93	143
DH452142	14.2		.5591	16	83	133	DH452166	16.6		.6535	18	93	143
DH452036E	14.288	9/16	.5625	16	83	133	DH452167	16.7		.6575	18	93	143
DH452143	14.3		.5630	16	83	133	DH452168	16.8		.6614	18	93	143
DH452144	14.4		.5669	16	83	133	DH452169	16.9		.6654	18	93	143
DH452145	14.5		.5708	16	83	133	DH452170	17.0		.6692	18	93	143
DH452146	14.6		.5748	16	83	133	DH452171	17.1		.6732	18	93	143
DH452147	14.7		.5787	16	83	133	DH452172	17.2		.6772	18	93	143
DH452148	14.8		.5827	16	83	133	DH452173	17.3		.6811	18	93	143
DH452149	14.9		.5866	16	83	133	DH452174	17.4		.6850	18	93	143
DH452150	15.0		.5905	16	83	133	DH452175	17.5		.6889	18	93	143
DH452151	15.1		.5945	16	83	133	DH452176	17.6		.6929	18	93	143
DH452152	15.2		.5984	16	83	133	DH452177	17.7		.6968	18	93	143
DH452153	15.3		.6024	16	83	133	DH452178	17.8		.7008	18	93	143
DH452154	15.4		.6063	16	83	133	DH452179	17.9		.7047	18	93	143
DH452155	15.5		.6102	16	83	133	DH452180	18.0		.7087	18	93	143
DH452156	15.6		.6142	16	83	133	DH452181	18.1		.7126	20	101	153
DH452157	15.7		.6181	16	83	133	DH452182	18.2		.7165	20	101	151
DH452158	15.8		.6220	16	83	133	DH452183	18.3		.7205	20	101	151

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH452

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

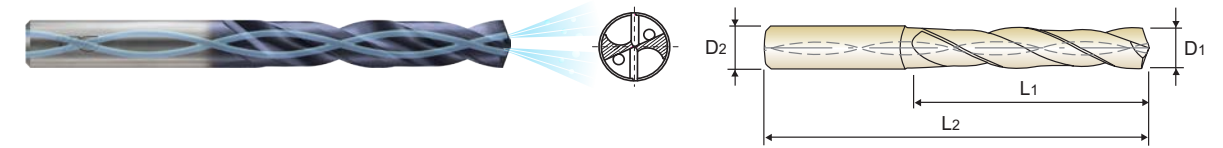

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH452184	18.4		.7244	20	101	153	DH452192	19.2		.7559	20	101	151
DH452185	18.5		.7283	20	101	153	DH452193	19.3		.7598	20	101	151
DH452186	18.6		.7323	20	101	151	DH452194	19.4		.7638	20	101	151
DH452187	18.7		.7362	20	101	153	DH452195	19.5		.7676	20	101	153
DH452188	18.8		.7402	20	101	153	DH452196	19.6		.7717	20	101	151
DH452189	18.9		.7441	20	101	153	DH452197	19.7		.7756	20	101	151
DH452190	19.0		.7480	20	101	153	DH452198	19.8		.7795	20	101	153
DH452048E	19.050	3/4	.7500	20	101	153	DH452199	19.9		.7835	20	101	151
DH452191	19.1		.7520	20	101	151	DH452200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH453

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

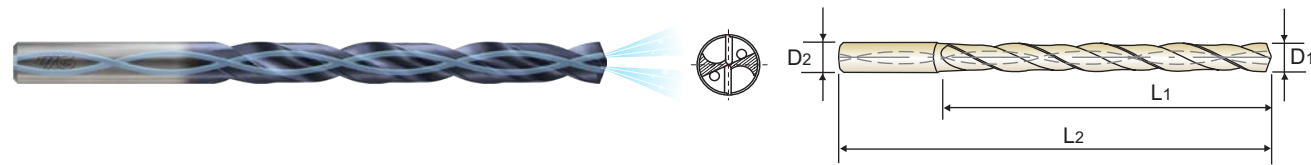

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453020	2.0		.0787	4	25	66
DH453021	2.1		.0827	4	25	66
DH453022	2.2		.0866	4	25	66
DH453023	2.3		.0906	4	25	66
DH453006E	2.381	3/32	.0938	4	30	66
DH453024	2.4		.0945	4	30	66
DH453025	2.5		.0984	4	30	66
DH453026	2.6		.1024	4	30	66
DH453027	2.7		.1063	4	30	66
DH453007F	2.778	7/64	.1094	4	30	66
DH453028	2.8		.1102	4	30	66
DH453029	2.9		.1142	4	30	66
DH453030	3.0		.1181	6	34	72
DH453031	3.1		.1220	6	34	72
DH453008E	3.175	1/8	.1250	6	34	72
DH453032	3.2		.1260	6	34	72
DH453033	3.3		.1299	6	34	72
DH453034	3.4		.1339	6	34	72
DH453029G	3.454	#29	.1360	6	34	72
DH453035	3.5		.1378	6	34	72
DH453009E	3.572	9/64	.1406	6	34	72
DH453036	3.6		.1417	6	34	72
DH453037	3.7		.1457	6	34	72
DH453038	3.8		.1496	6	43	81
DH453039	3.9		.1535	6	43	81
DH453010E	3.969	5/32	.1563	6	43	81
DH453040	4.0		.1575	6	43	81
DH453021G	4.038	#21	.1590	6	43	81

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453041	4.1		.1614	6	43	81
DH453042	4.2		.1654	6	43	81
DH453043	4.3		.1693	6	43	81
DH453011E	4.366	11/64	.1719	6	43	81
DH453044	4.4		.1732	6	43	81
DH453045	4.5		.1772	6	43	81
DH453046	4.6		.1811	6	43	81
DH453047	4.7		.1850	6	43	81
DH453012E	4.763	3/16	.1875	6	57	95
DH453048	4.8		.1890	6	57	95
DH453049	4.9		.1929	6	57	95
DH453050	5.0		.1969	6	57	95
DH453051	5.1		.2008	6	57	95
DH453013E	5.159	13/64	.2031	6	57	95
DH453052	5.2		.2047	6	57	95
DH453053	5.3		.2087	6	57	95
DH453054	5.4		.2126	6	57	95
DH453055	5.5		.2165	6	57	95
DH453014E	5.556	7/32	.2188	6	57	95
DH453056	5.6		.2205	6	57	95
DH453057	5.7		.2244	6	57	95
DH453058	5.8		.2283	6	57	95
DH453059	5.9		.2323	6	57	95
DH453015E	5.953	15/64	.2344	6	57	95
DH453060	6.0		.2362	6	57	95
DH453061	6.1		.2402	8	76	114
DH453062	6.2		.2441	8	76	114
DH453063	6.3		.2480	8	76	114

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH453

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

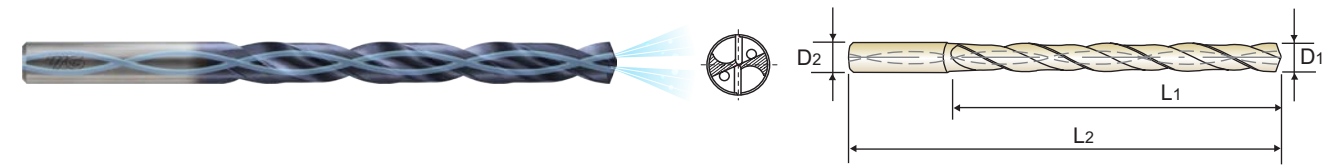

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453016E	6.350	1/4	.2500	8	76	114
DH453064	6.4		.2520	8	76	114
DH453065	6.5		.2559	8	76	114
DH453006L	6.527	F	.2570	8	76	114
DH453066	6.6		.2598	8	76	114
DH453067	6.7		.2638	8	76	114
DH453017E	6.747	17/64	.2656	8	76	114
DH453068	6.8		.2677	8	76	114
DH453069	6.9		.2717	8	76	114
DH453009L	6.909	I	.2720	8	76	114
DH453070	7.0		.2756	8	76	114
DH453071	7.1		.2795	8	76	114
DH453018E	7.144	9/32	.2813	8	76	114
DH453072	7.2		.2835	8	76	114
DH453073	7.3		.2874	8	76	114
DH453074	7.4		.2913	8	76	114
DH453075	7.5		.2953	8	76	114
DH453019E	7.541	19/64	.2969	8	76	114
DH453076	7.6		.2992	8	76	114
DH453077	7.7		.3031	8	76	114
DH453078	7.8		.3071	8	76	114
DH453079	7.9		.3110	8	76	114
DH453020E	7.938	5/16	.3125	8	76	114
DH453080	8.0		.3150	8	76	114
DH453081	8.1		.3189	10	95	142
DH453082	8.2		.3228	10	95	142
DH453083	8.3		.3268	10	95	142
DH453021E	8.334	21/64	.3281	10	95	142

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453084	8.4		.3307	10	95	142
DH453017L	8.432	Q	.3320	10	95	142
DH453085	8.5		.3346	10	95	142
DH453086	8.6		.3386	10	95	142
DH453087	8.7		.3425	10	95	142
DH453022E	8.731	11/32	.3438	10	95	142
DH453088	8.8		.3465	10	95	142
DH453089	8.9		.3504	10	95	142
DH453090	9.0		.3543	10	95	142
DH453091	9.1		.3583	10	95	142
DH453023E	9.128	23/64	.3594	10	95	142
DH453092	9.2		.3622	10	95	142
DH453093	9.3		.3661	10	95	142
DH453021L	9.347	U	.3680	10	95	142
DH453094	9.4		.3701	10	95	142
DH453095	9.5		.3740	10	95	142
DH453024E	9.525	3/8	.3750	10	95	142
DH453096	9.6		.3780	10	95	142
DH453097	9.7		.3819	10	95	142
DH453098	9.8		.3858	10	95	142
DH453099	9.9		.3898	10	95	142
DH453025E	9.922	25/64	.3906	10	95	142
DH453100	10.0		.3937	10	95	142
DH453101	10.1		.3976	12	114	162
DH453102	10.2		.4016	12	114	162
DH453103	10.3		.4055	12	114	162
DH453026E	10.319	13/32	.4063	12	114	162
DH453104	10.4		.4094	12	114	162

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39		

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH453

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

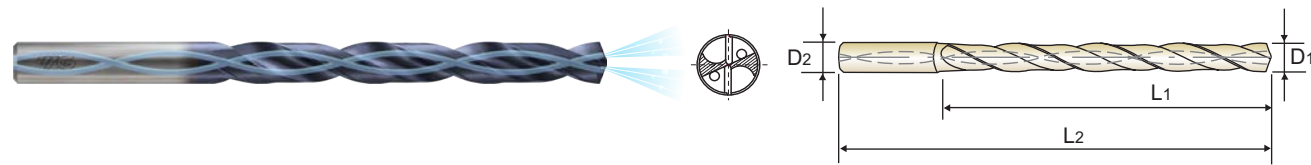

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453105	10.5		.4134	12	114	162
DH453106	10.6		.4173	12	114	162
DH453107	10.7		.4212	12	114	162
DH453027E	10.716	27/64	.4219	12	114	162
DH453108	10.8		.4252	12	114	162
DH453109	10.9		.4291	12	114	162
DH453110	11.0		.4330	12	114	162
DH453111	11.1		.4370	12	114	162
DH453028E	11.113	7/16	.4375	12	114	162
DH453112	11.2		.4409	12	114	162
DH453113	11.3		.4448	12	114	162
DH453114	11.4		.4488	12	114	162
DH453115	11.5		.4527	12	114	162
DH453029E	11.509	29/64	.4531	12	114	162
DH453116	11.6		.4566	12	114	162
DH453117	11.7		.4606	12	114	162
DH453118	11.8		.4645	12	114	162
DH453119	11.9		.4685	12	114	162
DH453030E	11.906	15/32	.4688	12	114	162
DH453120	12.0		.4724	12	114	162
DH453121	12.1		.4764	14	133	178
DH453122	12.2		.4803	14	133	178
DH453123	12.3		.4843	14	133	178
DH453031E	12.303	31/64	.4844	14	133	178
DH453124	12.4		.4882	14	133	178
DH453125	12.5		.4921	14	133	178
DH453126	12.6		.4961	14	133	178
DH453032E	12.7	1/2	.5000	14	133	178

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453128	12.8		.5039	14	133	178
DH453129	12.9		.5079	14	133	178
DH453130	13.0		.5118	14	133	178
DH453033E	13.097	33/64	.5156	14	133	178
DH453131	13.1		.5157	14	133	178
DH453132	13.2		.5197	14	133	178
DH453133	13.3		.5236	14	133	178
DH453134	13.4		.5276	14	133	178
DH453135	13.5		.5314	14	133	178
DH453136	13.6		.5354	14	133	178
DH453137	13.7		.5394	14	133	178
DH453138	13.8		.5433	14	133	178
DH453139	13.9		.5472	14	133	178
DH453140	14.0		.5512	14	133	178
DH453141	14.1		.5551	16	152	203
DH453142	14.2		.5591	16	152	203
DH453036E	14.288	9/16	.5625	16	152	203
DH453143	14.3		.5630	16	152	203
DH453144	14.4		.5669	16	152	203
DH453145	14.5		.5709	16	152	203
DH453146	14.6		.5748	16	152	203
DH453147	14.7		.5787	16	152	203
DH453148	14.8		.5827	16	152	203
DH453149	14.9		.5866	16	152	203
DH453150	15.0		.5905	16	152	203
DH453151	15.1		.5945	16	152	203
DH453152	15.2		.5984	16	152	203
DH453153	15.3		.6024	16	152	203

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS - INOX with COOLANT HOLES

SERIES

DH453

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAIN coating for better surface finishes and longer tool life

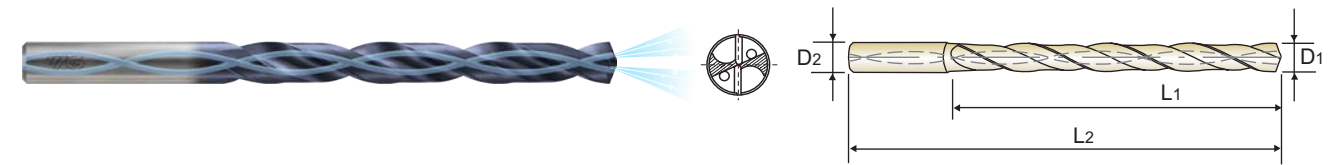

DIN 6537 CARBIDE h6 m7 140° 20 bar TiAIN p.136

EXTRA LONG
8 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453154	15.4		.6063	16	152	203
DH453155	15.5		.6102	16	152	203
DH453156	15.6		.6142	16	152	203
DH453157	15.7		.6181	16	152	203
DH453158	15.8		.6220	16	152	203
DH453040E	15.875	5/8	.6250	16	152	203
DH453159	15.9		.6260	16	152	203
DH453160	16.0		.6299	16	152	203
DH453161	16.1		.6339	18	171	222
DH453162	16.2		.6378	18	171	222
DH453163	16.3		.6417	18	171	222
DH453164	16.4		.6457	18	171	222
DH453165	16.5		.6496	18	171	222
DH453166	16.6		.6535	18	171	222
DH453167	16.7		.6575	18	171	222
DH453168	16.8		.6614	18	171	222
DH453169	16.9		.6654	18	171	222
DH453170	17.0		.6693	18	171	222
DH453171	17.1		.6732	18	171	222
DH453172	17.2		.6772	18	171	222
DH453173	17.3		.6811	18	171	222
DH453174	17.4		.6850	18	171	222
DH453175	17.5		.6890	18	171	222
DH453176	17.6		.6929	18	171	222
DH453177	17.7		.6968	18	171	222

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
TiAIN	D1			D2	L1	L2
DH453178	17.8		.7008	18	171	222
DH453179	17.9		.7047	18	171	222
DH453180	18.0		.7087	18	171	222
DH453181	18.1		.7126	20	190	243
DH453182	18.2		.7165	20	190	243
DH453183	18.3		.7205	20	190	243
DH453184	18.4		.7244	20	190	243
DH453185	18.5		.7283	20	190	243
DH453186	18.6		.7323	20	190	243
DH453187	18.7		.7362	20	190	243
DH453188	18.8		.7402	20	190	243
DH453189	18.9		.7441	20	190	243
DH453190	19.0		.7480	20	190	243
DH453048E	19.050	3/4	.7500	20	190	243
DH453191	19.1		.7520	20	190	243
DH453192	19.2		.7559	20	190	243
DH453193	19.3		.7598	20	190	243
DH453194	19.4		.7638	20	190	243
DH453195	19.5		.7677	20	190	243
DH453196	19.6		.7717	20	190	243
DH453197	19.7		.7756	20	190	243
DH453198	19.8		.7795	20	190	243
DH453199	19.9		.7835	20	190	243
DH453200	20.0		.7874	20	190	243

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm				

DH463, DH714, DH464, DH715, DH451, DH452, DH453 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter				SFM	Drill Diameter								
				METRIC	1.0	2.0	METRIC		3.0	-	4.0	-	5.0	6.0	-	-	8.0
				FRACTIONAL	-	-	FRACTIONAL		-	1/8	-	3/16	-	-	1/4	5/16	-
				DECIMAL	.0394	.0787	DECIMAL		.1181	.1250	.1575	.1875	.1969	.2362	.2500	.3125	.3150
P	2	Non-alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	3980				
				FEED	.0008 - .0016	.0016 - .0024		FEED	.0016 - .0039	.0024 - .0047	.0047 - .0071	.0055 - .0079	.0063 - .0087				
			3	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	3980			
					FEED	.0008 - .0016	.0016 - .0024		FEED	.0016 - .0039	.0024 - .0047	.0047 - .0071	.0055 - .0079	.0063 - .0087			
	6	Low alloy steel	230	RPM	22280	11140	329	RPM	10610	7960	6370	5310	3980				
				FEED	.0008 - .0016	.0016 - .0024		FEED	.0016 - .0039	.0024 - .0047	.0047 - .0071	.0055 - .0079	.0063 - .0087				
			7	160	RPM	15920	7960	230	RPM	7430	5570	4460	3710	2790			
					FEED	.0008 - .0016	.0016 - .0024		FEED	.0016 - .0039	.0024 - .0047	.0047 - .0071	.0055 - .0079	.0063 - .0087			
M	12	Stainless steel	130	RPM	12730	6370	165	RPM	5310	3980	3180	2650	1990				
				FEED	.0008 - .0016	.0008 - .0016		FEED	.0012 - .0020	.0020 - .0035	.0028 - .0043	.0035 - .0051	.0035 - .0051				
	13		80	RPM	7960	3980	132	RPM	4240	3180	2550	2120	1590				
				FEED	.0008 - .0016	.0008 - .0016		FEED	.0012 - .0020	.0020 - .0035	.0028 - .0043	.0035 - .0051	.0035 - .0051				
	14		150	RPM	14320	7160	198	RPM	6370	4770	3820	3180	2390				
				FEED	.0008 - .0016	.0008 - .0016		FEED	.0016 - .0024	.0024 - .0039	.0031 - .0047	.0039 - .0055	.0039 - .0055				
N	21	Aluminum-wrought alloy	430	RPM	41380	20690	659	RPM	21220	15920	12730	10610	7960				
				FEED	.0016 - .0039	.0031 - .0055		FEED	.0055 - .0079	.0075 - .0098	.0079 - .0102	.0087 - .0110	.0094 - .0118				
	22	430	RPM	41380	20690	659	RPM	21220	15920	12730	10610	7960					
			FEED	.0016 - .0039	.0031 - .0055		FEED	.0055 - .0079	.0075 - .0098	.0079 - .0102	.0087 - .0110	.0094 - .0118					
	23	Aluminum-wrought alloy	360	RPM	35010	17510	593	RPM	19100	14320	11460	9550	7160				
				FEED	.0016 - .0039	.0031 - .0055		FEED	.0055 - .0079	.0075 - .0098	.0079 - .0102	.0087 - .0110	.0094 - .0118				
	24	Aluminum-wrought alloy	360	RPM	35010	17510	593	RPM	19100	14320	11460	9550	7160				
				FEED	.0016 - .0039	.0031 - .0055		FEED	.0055 - .0079	.0075 - .0098	.0079 - .0102	.0087 - .0110	.0094 - .0118				
	25	Aluminum-wrought alloy	300	RPM	28650	14320	494	RPM	15920	11940	9550	7960	5970				
				FEED	.0016 - .0031	.0024 - .0039		FEED	.0047 - .0071	.0063 - .0087	.0067 - .0091	.0075 - .0098	.0087 - .0110				
S	37	Titanium Alloys	80	RPM	7960	3980	132	RPM	4240	3180	2550	2120	1590				
				FEED	.0004 - .0012	.0004 - .0012		FEED	.0008 - .0016	.0016 - .0031	.0024 - .0039	.0031 - .0047	.0031 - .0047				

► Recommend to reduce the feed rate as following
Feed 100% : DH463/DH714/DH451(3xD), DH464/DH714/DH452(5xD)
Feed 85% : DH453(8xD)

► NEXT PAGE

DH463, DH714, DH464, DH715, DH451, DH452, DH453 SERIES

with COOLANT HOLES


SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter											
				METRIC	-	10.0	12.0	-	14.0	-	-	16.0	18.0	-	20.0
				FRACTIONAL	3/8	-	-	1/2	-	9/16	5/8	-	-	3/4	-
				DECIMAL	.3750	.3937	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874
P	2	Non-alloy steel	329	RPM	3180	2650	2510	2270	1990	1770	1680	1590			
				FEED	.0079 - .0102	.0071 - .0110	.0071 - .0110	.0079 - .0118	.0087 - .0126	.0102 - .0142	.0102 - .0142	.0110 - .0150			
			3	329	RPM	3180	2650	2510	2270	1990	1770	1680	1590		
					FEED	.0079 - .0102	.0071 - .0110	.0071 - .0110	.0079 - .0118	.0087 - .0126	.0102 - .0142	.0102 - .0142	.0110 - .0150		
	6	Low alloy steel	329	RPM	3180	2650	2510	2270	1990	1770	1680	1590			
				FEED	.0079 - .0102	.0071 - .0110	.0071 - .0110	.0079 - .0118	.0087 - .0126	.0102 - .0142	.0102 - .0142	.0110 - .0150			
			7	230	RPM	2230	1860	1760	1590	1390	1240	1170	1110		
					FEED	.0079 - .0102	.0071 - .0110	.0071 - .0110	.0079 - .0118	.0087 - .0126	.0102 - .0142	.0102 - .0142	.0110 - .0150		
M	12	Stainless steel	165	RPM	1590	1330	1260	1140	990	880	840	800			
				FEED	.0039 - .0059	.0043 - .0063	.0043 - .0063	.0047 - .0067	.0051 - .0071	.0055 - .0075	.0055 - .0075	.0059 - .0079			
	13		132	RPM	1270	1060	1010	910	800	710	670	640			
				FEED	.0039 - .0059	.0043 - .0063	.0043 - .0063	.0047 - .0067	.0051 - .0071	.0055 - .0075	.0055 - .0075	.0059 - .0079			
	14		198	RPM	1910	1590	1510	1360	1190	1060	1010	950			
				FEED	.0043 - .0063	.0047 - .0067	.0047 - .0067	.0051 - .0071	.0055 - .0075	.0059 - .0079	.0059 - .0079	.0063 - .0083			
N	21	Aluminum-wrought alloy	659	RPM	6370	5310	5030	4550	3980	3540	3360	3180			
				FEED	.0114 - .0138	.0114 - .0138	.0114 - .0138	.0118 - .0157	.0118 - .0157	.0130 - .0169	.0130 - .0169	.0138 - .0177			
	22	659	RPM	6370	5310	5030	4550	3980	3540	3360	3180				
			FEED	.0114 - .0138	.0114 - .0138	.0114 - .0138	.0118 - .0157	.0118 - .0157	.0130 - .0169	.0130 - .0169	.0138 - .0177				
	23	Aluminum-wrought alloy	593	RPM	5730	4770	4530	4090	3580	3180	3020	2860			
				FEED	.0114 - .0138	.0114 - .0138	.0114 - .0138	.0118 - .0157	.0118 - .0157	.0130 - .0169	.0130 - .0169	.0138 - .0177			
	24	Aluminum-wrought alloy	593	RPM	5730	4770	4530	4090	3580	3180	3020	2860			
				FEED	.0114 - .0138	.0114 - .0138	.0114 - .0138	.0118 - .0157	.0118 - .0157	.0130 - .0169	.0130 - .0169	.0138 - .0177			
	25	Aluminum-wrought alloy	494	RPM	4770	3980	3770	3410	2980	2650	2520	2390			
				FEED	.0094 - .0118	.0094 - .0118	.0094 - .0118	.0098 - .0138	.0098 - .0138	.0110 - .0150	.0110 - .0150	.0118 - .0157			
S	37	Titanium Alloys	132	RPM	1270	1060	1010	910	800	710	670	640			
				FEED	.0035 - .0055	.0039 - .0059	.0039 - .0059	.0043 - .0063	.0047 - .0067	.0051 - .0071	.0051 - .0071	.0055 - .0075			

► Recommend to reduce the feed rate as following
Feed 100% : DH463/DH714/DH451(3xD), DH464/DH714/DH452(5xD)
Feed 85% : DH453(8xD)



Global Cutting Tool Leader **YG-1**



DREAM DRILLS



Leading Through Innovation




SOLID CARBIDE

DREAM DRILLS - ALU

- For Aluminum and Aluminum Alloys

DREAM DRILLS ALU



Design that optimized flute shape and geometry suitable for **Aluminum, Aluminum alloy.**

Optimized point thinning to prevent any **chip-clogging from chip welding.**



Polished flutes improve **chip control and evacuation.**

The Drilling of High Speed is possible while maintaining the **excellent surface roughness of workpiece.**

► SOLID CARBIDE DREAM DRILLS - ALU with Coolant Holes

Ø6.0 & Ø10.0 TEST, Aluminum(6061)


CUTTING CONDITION	DREAM DRILLS-ALU YG		COMPETITOR A	
	Roundness	Straightness	Roundness	Straightness
SIZE Ø 6.0				
Drilling Holes 1,200 Holes				
SIZE Ø10.0				
Drilling Holes 820 Holes				

CASE STUDY


► SOLID CARBIDE DREAM DRILLS - ALU with Coolant Holes

Cutting Condition

Size	Ø10 × Ø10 × 61 × 103
Work Material	- AISI : 6061 - DIN : AlMgSiCu (HB75) - JIS : A6061
RPM	6,367 rev./min.
SFM	656 ft/min.
Feed	.0157 ~ .0315 inch/rev.
Drilling Depth	1.77" (4.5xD)
Coolant	Wet Cut
Machine	Machining Center

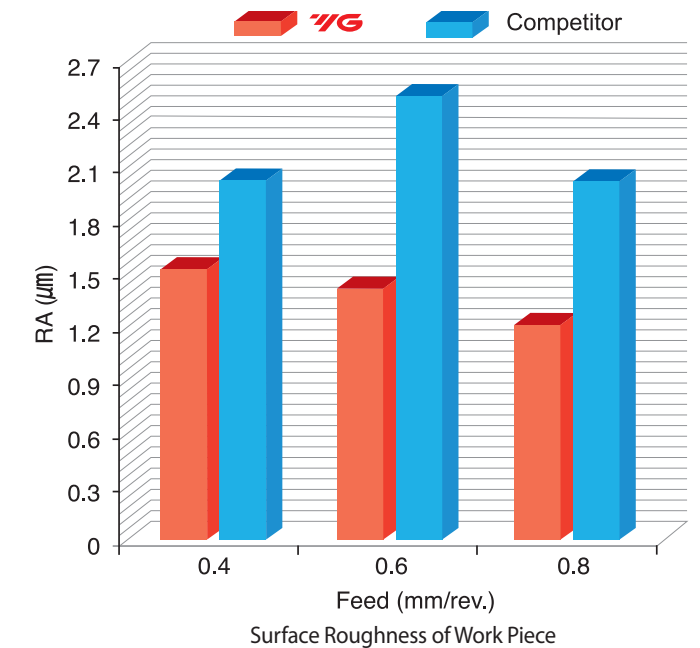


Total Drilling 820 Holes

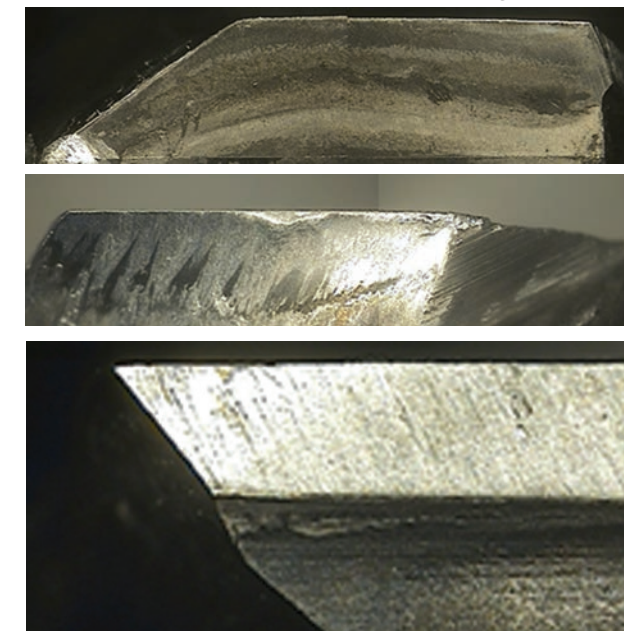

Competitor

Total Drilling 820 Holes

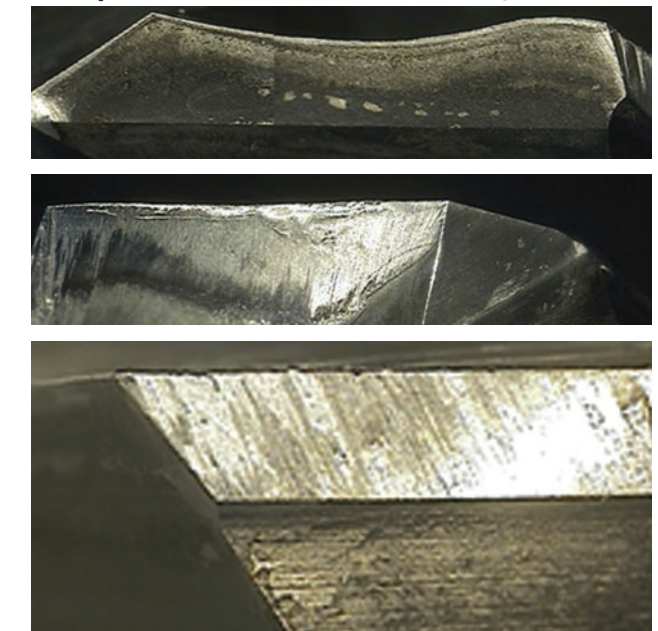

**DLC-COATED SOLID CARBIDE
DREAM DRILLS - ALU with COOLANT HOLES**

SERIES
DGE466
DGE718

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes



LONG
5 x D

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
DLC	D1		D2	L1	L2
DGE466013	13/64	.2031	15/64	1-3/4	3-15/16
DGE718013	13/64	.2031	1/4	1-3/4	3-15/16
DGE466014	7/32	.2188	15/64	1-57/64	3-15/16
DGE718014	7/32	.2188	1/4	1-57/64	3-15/16
DGE466015	15/64	.2344	15/64	1-57/64	3-15/16
DGE718015	15/64	.2344	1/4	1-57/64	3-15/16
DGE718016	1/4	.2500	1/4	2-3/64	4-19/64
DGE466016	1/4	.2500	17/64	2-3/64	4-19/64
DGE466206	F	.2570	17/64	2-13/64	4-19/64
DGE718206	F	.2570	5/16	2-13/64	4-19/64
DGE466017	17/64	.2656	17/64	2-13/64	4-19/64
DGE718017	17/64	.2656	5/16	2-13/64	4-19/64
DGE466209	I	.2720	.272	2-13/64	4-19/64
DGE718209	I	.2720	5/16	2-13/64	4-19/64
DGE466018	9/32	.2812	5/16	2-23/64	4-41/64
DGE466019	19/64	.2969	5/16	2-33/64	4-41/64
DGE466020	5/16	.3125	5/16	2-33/64	4-41/64
DGE466021	21/64	.3281	11/32	2-43/64	5
DGE718021	21/64	.3281	3/8	2-43/64	5
DGE466217	Q	.3320	11/32	2-43/64	5
DGE718217	Q	.3320	3/8	2-43/64	5
DGE466022	11/32	.3438	11/32	2-27/32	5

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
DLC	D1		D2	L1	L2
DGE718022	11/32	.3438	3/8	2-27/32	5
DGE718023	23/64	.3594	3/8	3	5-23/64
DGE466023	23/64	.3594	25/64	3	5-23/64
DGE718221	U	.3680	3/8	3	5-23/64
DGE466221	U	.3680	25/64	3	5-23/64
DGE718024	3/8	.3750	3/8	3-5/32	5-23/64
DGE466024	3/8	.3750	25/64	3-5/32	5-23/64
DGE466025	25/64	.3906	25/64	3-5/32	5-23/64
DGE718025	25/64	.3906	7/16	3-5/32	5-23/64
DGE466026	13/32	.4062	27/64	3-5/16	5-7/8
DGE718026	13/32	.4062	7/16	3-5/16	5-7/8
DGE466027	27/64	.4219	27/64	3-15/32	5-7/8
DGE718027	27/64	.4219	7/16	3-15/32	5-7/8
DGE718028	7/16	.4375	7/16	3-5/8	6-7/32
DGE466028	7/16	.4375	15/32	3-5/8	6-7/32
DGE466029	29/64	.4531	15/32	3-25/32	6-7/32
DGE718029	29/64	.4531	1/2	3-25/32	6-7/32
DGE466030	15/32	.4688	15/32	3-25/32	6-7/32
DGE718030	15/32	.4688	1/2	3-25/32	6-7/32
DGE466031	31/64	.4844	1/2	3-15/16	6-37/64
DGE466032	1/2	.5000	1/2	4-3/32	6-37/64

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRC	125	13	25	28	300	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended																									

ISO	N										S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	55	60	42	55
Recommended	◎	◎	◎	◎																					

**DLC-COATED SOLID CARBIDE
DREAM DRILLS - ALU with COOLANT HOLES**

SERIES
DGE433

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes



LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2
DGE433030	3.0		.1181	6	28	66
DGE433031	3.1		.1220	6	28	66
DGE433008E	3.175	1/8	.1250	6	28	66
DGE433032	3.2		.1260	6	28	66
DGE433033	3.3		.1299	6	28	66
DGE433034	3.4		.1339	6	28	66
DGE433035	3.5		.1378	6	28	66
DGE433009E	3.572	9/64	.1406	6	28	66
DGE433036	3.6		.1417	6	28	66
DGE433037	3.7		.1457	6	28	66
DGE433038	3.8		.1496	6	36	74
DGE433039	3.9		.1535	6	36	74
DGE433010E	3.969	5/32	.1563	6	36	74
DGE433040	4.0		.1575	6	36	74
DGE433041	4.1		.1614	6	36	74
DGE433042	4.2		.1654	6	36	74
DGE433043	4.3		.1693	6	36	74
DGE433011E	4.366	11/64	.1719	6	36	74
DGE433044	4.4		.1732	6	36	74
DGE433045	4.5		.1772	6	36	74
DGE433046	4.6		.1811	6	36	74
DGE433047	4.7		.1850	6	36	74
DGE433012E	4.763	3/16	.1875	6	36	74
DGE433048	4.8		.1890	6	44	82
DGE433049	4.9		.1929	6	44	82
DGE433050	5.0		.1969	6	44	82

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2
DGE433051	5.1		.2008	6	44	82
DGE433013E	5.159	13/64	.2031	6	44	82
DGE433052	5.2		.2047	6	44	82
DGE433053	5.3		.2087	6	44	82
DGE433054	5.4		.2126	6	44	82
DGE433055	5.5		.2165	6	44	82
DGE433014E	5.556	7/32	.2188	6	44	82
DGE433056	5.6		.2205	6	44	82
DGE433057	5.7		.2244	6	44	82
DGE433058	5.8		.2283	6	44	82
DGE433059	5.9		.2323	6	44	82
DGE433015E	5.953	15/64	.2344	6	44	82
DGE433060	6.0		.2362	6	44	82
DGE433061	6.1		.2402	8	53	91
DGE433062	6.2		.2441	8	53	91
DGE433063	6.3		.2480	8	53	91
DGE433016E	6.350	1/4	.2500	8	53	91
DGE433064	6.4		.2520	8	53	91
DGE433065	6.5		.2559	8	53	91
DGE433006L	6.528	F	.2570	8	53	9
DGE433066	6.6		.2598	8	53	91
DGE433067	6.7		.2638	8	53	91
DGE433017E	6.747	17/64	.2656	8	53	91
DGE433068	6.8		.2677	8	53	91
DGE433069	6.9		.2717	8	53	91
DGE433009L	6.909	I	.2720	8	53	91

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended																									

ISO	N										S					H									
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	55	60	42	55
Recommended	◎	◎	◎	◎																					

**DLC-COATED SOLID CARBIDE
DREAM DRILLS - ALU with COOLANT HOLES**

SERIES

DGE433

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes



DIN 6537 CARBIDE h6 m7 118° 20 bar DLC p.147

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2	DLC	D1			D2	L1	L2
DGE433070	7.0		.2756	8	53	91	DGE433090	9.0		.3543	10	61	103
DGE433071	7.1		.2795	8	53	91	DGE433091	9.1		.3583	10	61	103
DGE433018E	7.144	9/32	.2812	8	53	91	DGE433023E	9.128	23/64	.3594	10	61	103
DGE433072	7.2		.2835	8	53	91	DGE433092	9.2		.3622	10	61	103
DGE433073	7.3		.2874	8	53	91	DGE433093	9.3		.3661	10	61	103
DGE433074	7.4		.2913	8	53	91	DGE433021L	9.347	U	.3680	10	61	103
DGE433075	7.5		.2953	8	53	91	DGE433094	9.4		.3701	10	61	103
DGE433019E	7.541	19/64	.2969	8	53	91	DGE433095	9.5		.3740	10	61	103
DGE433076	7.6		.2992	8	53	91	DGE433024E	9.525	3/8	.3750	10	61	103
DGE433077	7.7		.3031	8	53	91	DGE433096	9.6		.3780	10	61	103
DGE433078	7.8		.3071	8	53	91	DGE433097	9.7		.3819	10	61	103
DGE433079	7.9		.3110	8	53	91	DGE433098	9.8		.3858	10	61	103
DGE433020E	7.938	5/16	.3125	8	53	91	DGE433099	9.9		.3898	10	61	103
DGE433080	8.0		.3150	8	53	91	DGE433025E	9.922	25/64	.3906	10	61	103
DGE433081	8.1		.3189	10	61	103	DGE433100	10.0		.3937	10	61	103
DGE433082	8.2		.3228	10	61	103	DGE433101	10.1		.3976	12	71	118
DGE433083	8.3		.3268	10	61	103	DGE433102	10.2		.4016	12	71	118
DGE433021E	8.334	21/64	.3281	10	61	103	DGE433103	10.3		.4055	12	71	118
DGE433084	8.4		.3307	10	61	103	DGE433026E	10.319	13/32	.4062	12	71	118
DGE433017L	8.433	Q	.3320	10	61	103	DGE433104	10.4		.4094	12	71	118
DGE433085	8.5		.3346	10	61	103	DGE433105	10.5		.4134	12	71	118
DGE433086	8.6		.3386	10	61	103	DGE433106	10.6		.4173	12	71	118
DGE433087	8.7		.3425	10	61	103	DGE433107	10.7		.4212	12	71	118
DGE433022E	8.731	11/32	.3438	10	61	103	DGE433027E	10.716	27/64	.4219	12	71	118
DGE433088	8.8		.3465	10	61	103	DGE433108	10.8		.4252	12	71	118
DGE433089	8.9		.3504	10	61	103	DGE433109	10.9		.4291	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

**DLC-COATED SOLID CARBIDE
DREAM DRILLS - ALU with COOLANT HOLES**

SERIES

DGE433

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes



DIN 6537 CARBIDE h6 m7 118° 20 bar DLC p.147

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal					Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2	DLC	D1			D2	L1	L2
DGE433110	11.0		.4330	12	71	118	DGE433132	13.2		.5197	14	77	124
DGE433111	11.1		.4370	12	71	118	DGE433133	13.3		.5236	14	77	124
DGE433028E	11.113	7/16	.4375	12	71	118	DGE433134	13.4		.5276	14	77	124
DGE433112	11.2		.4409	12	71	118	DGE433135	13.5		.5314	14	77	124
DGE433113	11.3		.4448	12	71	118	DGE433136	13.6		.5354	14	77	124
DGE433114	11.4		.4488	12	71	118	DGE433137	13.7		.5394	14	77	124
DGE433115	11.5		.4527	12	71	118	DGE433138	13.8		.5433	14	77	124
DGE433029E	11.509	29/64	.4531	12	71	118	DGE433139	13.9		.5472	14	77	124
DGE433116	11.6		.4566	12	71	118	DGE433140	14.0		.5512	14	77	124
DGE433117	11.7		.4606	12	71	118	DGE433141	14.1		.5551	16	83	133
DGE433118	11.8		.4645	12	71	118	DGE433142	14.2		.5591	16	83	133
DGE433119	11.9		.4685	12	71	118	DGE433036E	14.288	9/16	.5625	16	83	133
DGE433030E	11.906	15/32	.4688	12	71	118	DGE433143	14.3		.5630	16	83	133
DGE433120	12.0		.4724	12	71	118	DGE433144	14.4		.5669	16	83	133
DGE433121	12.1		.4764	14	77	124	DGE433145	14.5		.5708	16	83	133
DGE433122	12.2		.4803	14	77	124	DGE433146	14.6		.5748	16	83	133
DGE433123	12.3		.4843	14	77	124	DGE433147	14.7		.5787	16	83	133
DGE433031E	12.303	31/64	.4844	14	77	124	DGE433148	14.8		.5827	16	83	133
DGE433124	12.4		.4882	14	77	124	DGE433149	14.9		.5866	16	83	133
DGE433125	12.5		.4921	14	77	124	DGE433150	15.0		.5905	16	83	133
DGE433126	12.6		.4961	14	77	124	DGE433151	15.1		.5945	16	83	133
DGE433032E	12.7	1/2	.5000	14	77	124	DGE433152	15.2		.5984	16	83	133
DGE433128	12.8		.5039	14	77	124	DGE433153	15.3		.6024	16	83	133
DGE433129	12.9		.5079	14	77	124	DGE433154	15.4		.6063	16	83	133
DGE433130	13.0		.5118	14	77	124	DGE433155	15.5		.6102	16	83	133
DGE433131	13.1		.5157	14	77	124	DGE433156	15.6		.6142	16	83	133

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P									M				K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended																				

ISO Material Description	N						S						H								
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

DLC-COATED SOLID CARBIDE
DREAM DRILLS - ALU with COOLANT HOLES

SERIES

DGE433

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes



DIN 6537
CARBIDE
h6
m7
118°
20 bar
DLC
p.147

LONG
5 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2
DGE433157	15.7		.6181	16	83	133
DGE433158	15.8		.6220	16	83	133
DGE433040E	15.875	5/8	.6250	16	83	133
DGE433159	15.9		.6260	16	83	133
DGE433160	16.0		.6299	16	83	133
DGE433161	16.1		.6339	18	93	143
DGE433162	16.2		.6378	18	93	143
DGE433163	16.3		.6417	18	93	143
DGE433164	16.4		.6457	18	93	143
DGE433165	16.5		.6495	18	93	143
DGE433166	16.6		.6535	18	93	143
DGE433167	16.7		.6575	18	93	143
DGE433168	16.8		.6614	18	93	143
DGE433169	16.9		.6654	18	93	143
DGE433170	17.0		.6692	18	93	143
DGE433171	17.1		.6732	18	93	143
DGE433172	17.2		.6772	18	93	143
DGE433173	17.3		.6811	18	93	143
DGE433174	17.4		.6850	18	93	143
DGE433175	17.5		.6889	18	93	143
DGE433176	17.6		.6929	18	93	143
DGE433177	17.7		.6968	18	93	143
DGE433178	17.8		.7008	18	93	143

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Fractional	Decimal			
DLC	D1			D2	L1	L2
DGE433179	17.9		.7047	18	93	143
DGE433180	18.0		.7087	18	93	143
DGE433181	18.1		.7126	20	101	153
DGE433182	18.2		.7165	20	101	153
DGE433183	18.3		.7205	20	101	153
DGE433184	18.4		.7244	20	101	153
DGE433185	18.5		.7283	20	101	153
DGE433186	18.6		.7323	20	101	153
DGE433187	18.7		.7362	20	101	153
DGE433188	18.8		.7402	20	101	153
DGE433189	18.9		.7441	20	101	153
DGE433190	19.0		.7480	20	101	153
DGE433048E	19.050	3/4	.7500	20	101	153
DGE433191	19.1		.7520	20	101	153
DGE433192	19.2		.7559	20	101	153
DGE433193	19.3		.7598	20	101	153
DGE433194	19.4		.7638	20	101	153
DGE433195	19.5		.7676	20	101	153
DGE433196	19.6		.7717	20	101	153
DGE433197	19.7		.7756	20	101	153
DGE433198	19.8		.7795	20	101	153
DGE433199	19.9		.7835	20	101	153
DGE433200	20.0		.7874	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323																					
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					
ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

RECOMMENDED CUTTING CONDITIONS

DREAM DRILLS ALU

DGE466, DGE718, DGE433 SERIES

with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter											
				METRIC	3.0	-	4.0	-	5.0	6.0	-	8.0	-	10.0	
				FRACTIONAL	-	1/8	-	3/16	-	-	1/4	5/16	-	3/8	-
				DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500	.3125	.3150	.3750	.3937
N	21	Aluminum-wrought alloy	658	RPM	21220	15920	12730	10610	7960	6370					
			FEED	.0047 - .0071	.0055 - .0087	.0059 - .0091	.0067 - .0098	.0083 - .0110	.0094 - .0118						
	527		RPM	16980	12730	10190	8490	6370	5090						
	FEED		.0047 - .0071	.0055 - .0087	.0059 - .0091	.0067 - .0098	.0083 - .0110	.0094 - .0118							
	23	Aluminum-cast, alloyed	494	RPM	15920	11940	9550	7960	5970	4770					
			FEED	.0059 - .0083	.0067 - .0098	.0075 - .0106	.0083 - .0110	.0094 - .0122	.0114 - .0177						
	461		RPM	14850	11140	8910	7430	5570	4460						
	FEED		.0059 - .0083	.0067 - .0098	.0075 - .0106	.0083 - .0110	.0094 - .0122	.0114 - .0177							


ISO	VDI 3323	Material Description	SFM	Drill Diameter									
				METRIC	12.0	-	14.0	-	16.0	18.0	-	20.0	
				FRACTIONAL	-	1/2	-	9/16	5/8	-	-	3/4	-
				DECIMAL	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500	.7874
N	21	Aluminum-wrought alloy	658	RPM	5310	5030	4550	3980	3540	3350	3180		
			FEED	.0094 - .0118	.0094 - .0118	.0098 - .0138	.0098 - .0138	.0110 - .0150	.0110 - .0150	.0118 - .0157			
	527		RPM	4240	4030	3640	3180	2830	2680	2550			
	FEED		.0094 - .0118	.0094 - .0118	.0098 - .0138	.0098 - .0138	.0110 - .0150	.0110 - .0150	.0118 - .0157				
	23	Aluminum-cast, alloyed	494	RPM	3980	3770	3410	2980	2650	2520	2390		
			FEED	.0130 - .0217	.0130 - .0217	.0138 - .0236	.0138 - .0236	.0154 - .0287	.0154 - .0287	.0154 - .0335			
	461		RPM	3710	3520	3180	2790	2480	2350	2230			
	FEED		.0130 - .0217	.0130 - .0217	.0138 - .0236	.0138 - .0236	.0154 - .0287	.0154 - .0287	.0154 - .0335				



Leading Through Innovation



Global Cutting Tool Leader YG-1



DREAM DRILLS


SOLID CARBIDE

DREAM DRILLS - MQL TYPE

- Minimum Quantity Lubrication Drilling Deep Holes (10xD ~ 40xD)


DREAM DRILLS MQL TYPE

4-Facet point for good centering capability



Polished flute for enhanced chip evacuation

Optimized special flutes are ideal for removing chips and for productive drilling



Upgraded TiAlN Nano-Layer Full Coating

Compatible with the MQL (Minimum Quantity Lubrication) system

- Reduction of Coolant related costs such as preparing, maintaining, disposal of emulsion
- Avoids additional efforts associated with part cleaning
- Allows for secure machining process ensuring predictable lubrication

Compare with Gun drills

- Used on conventional machining center (MQL Drills)
- **Higher productivity** than conventional HSS deep hole drills and Gun drills



Gun Drill
 - Size Range : Ø2~Ø25
 - Drilling Depth : 25xD ~ over 100xD
 * Need Gun drilling machine

MQL Drill
 - Size Range : Ø3~Ø14
 - Drilling Depth : 10xD ~ 40xD
 * Need enough machine stroke on machining center


CASE STUDY

- Flute Shape and Point Shape allowing better chip evacuation in deep hole drilling
- Excellent Coating and Surface Treatment for better performance and chip evacuation


► SOLID CARBIDE DREAM DRILLS - MQL Type with Coolant Holes

Cutting Condition

Tool	DH520060
Size	Ø6 × Ø6 × 138 × 193
Work Material	- AISI : 1045 - DIN : C45(HRc25) - JIS : S45C
RPM	3,528 rev./min.
SFM	218 ft/min.
Feed	.0075 inch/rev.
Drilling Depth	3.15" (20xD)
Coolant	Wet Cut
Machine	Machining Center

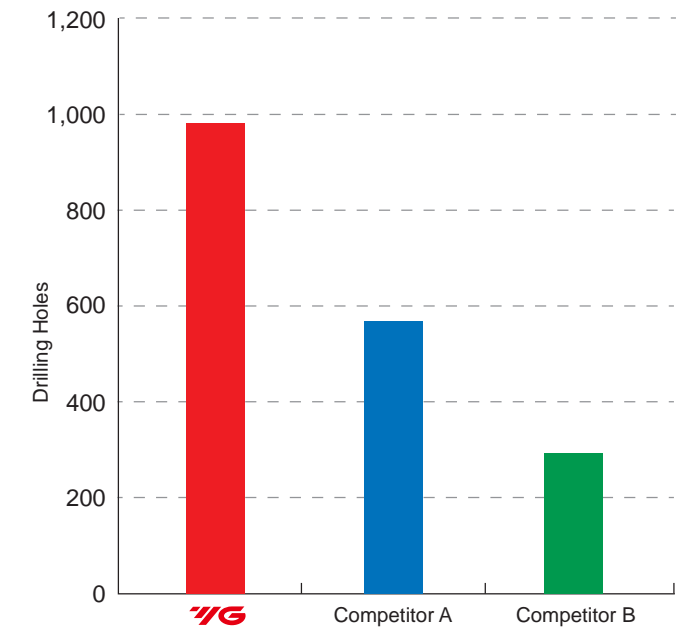


After Drilling 1,000 Holes

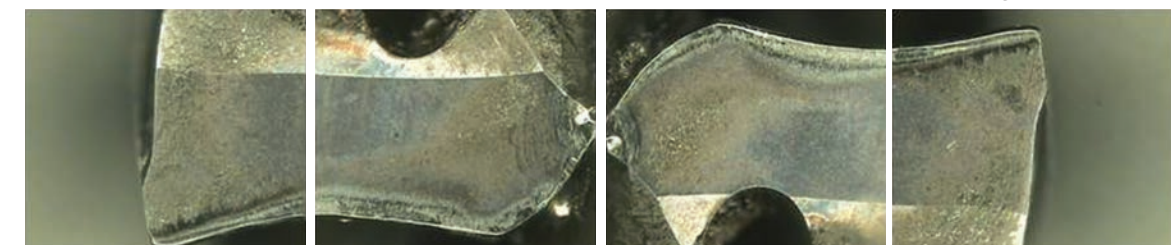

Competitor A

After Drilling 546 Holes

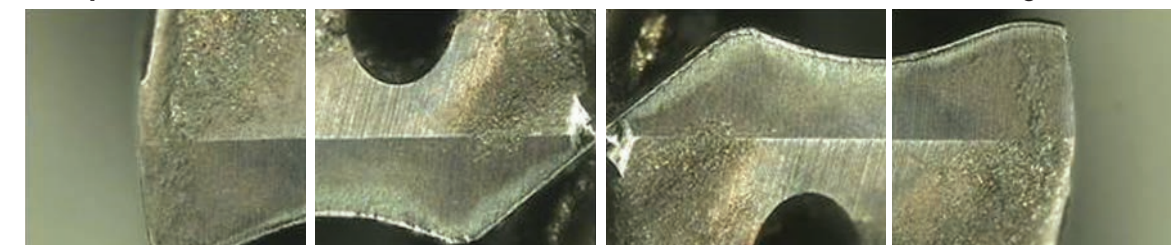



TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH510

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)



EXTRA LONG
10 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1						TiAIN	D1					
DH510030	3.0		.1181	3	39	90	DH510055	5.5		.2165	6	72	127
DH510031	3.1		.1220	4	46	97	DH510056	5.6		.2205	6	78	133
DH510008E	3.175	1/8	.1250	4	46	97	DH510057	5.7		.2244	6	78	133
DH510032	3.2		.1260	4	46	97	DH510058	5.8		.2283	6	78	133
DH510033	3.3		.1299	4	46	97	DH510059	5.9		.2323	6	78	133
DH510034	3.4		.1339	4	46	97	DH510060	6.0		.2362	6	78	133
DH510035	3.5		.1378	4	46	97	DH510061	6.1		.2402	7	85	141
DH510036	3.6		.1417	4	52	103	DH510062	6.2		.2441	7	85	141
DH510037	3.7		.1457	4	52	103	DH510063	6.3		.2480	7	85	141
DH510038	3.8		.1496	4	52	103	DH510016E	6.350	1/4	.2500	7	85	141
DH510039	3.9		.1535	4	52	103	DH510064	6.4		.2520	7	85	141
DH510040	4.0		.1575	4	52	103	DH510065	6.5		.2559	7	85	141
DH510041	4.1		.1614	5	59	112	DH510206L	6.528	F	.2570	7	91	147
DH510042	4.2		.1654	5	59	112	DH510066	6.6		.2598	7	91	147
DH510043	4.3		.1693	5	59	112	DH510067	6.7		.2638	7	91	147
DH510044	4.4		.1732	5	59	112	DH510017E	6.746	17/64	.2656	7	91	147
DH510045	4.5		.1772	5	59	112	DH510068	6.8		.2677	7	91	147
DH510046	4.6		.1811	5	65	118	DH510069	6.9		.2717	7	91	147
DH510047	4.7		.1850	5	65	118	DH510209L	6.909	I	.2720	7	91	147
DH510048	4.8		.1890	5	65	118	DH510070	7.0		.2756	7	91	147
DH510049	4.9		.1929	5	65	118	DH510071	7.1		.2795	8	98	155
DH510050	5.0		.1969	5	65	118	DH510018E	7.142	9/32	.2812	8	98	155
DH510051	5.1		.2008	6	72	127	DH510072	7.2		.2835	8	98	155
DH510052	5.2		.2047	6	72	127	DH510073	7.3		.2874	8	98	155
DH510053	5.3		.2087	6	72	127	DH510074	7.4		.2913	8	98	155
DH510054	5.4		.2126	6	72	127	DH510075	7.5		.2953	8	98	155

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH510

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)



EXTRA LONG
10 x D

EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter			Shank Diameter D2	Flute Length L1	Overall Length L2
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1						TiAIN	D1					
DH510019E	7.541	19/64	.2969	8	104	161	DH510095	9.5		.3740	10	124	182
DH510076	7.6		.2992	8	104	161	DH510024E	9.525	3/8	.3750	10	130	188
DH510077	7.7		.3031	8	104	161	DH510096	9.6		.3780	10	130	188
DH510078	7.8		.3071	8	104	161	DH510097	9.7		.3819	10	130	188
DH510079	7.9		.3110	8	104	161	DH510098	9.8		.3858	10	130	188
DH510020E	7.938	5/16	.3125	8	104	161	DH510099	9.9		.3898	10	130	188
DH510080	8.0		.3150	8	104	161	DH510025E	9.921	25/64	.3906	10	130	188
DH510081	8.1		.3189	9	111	169	DH510100	10.0		.3937	10	130	188
DH510082	8.2		.3228	9	111	169	DH510101	10.1		.3976	11	137	201
DH510083	8.3		.3268	9	111	169	DH510102	10.2		.4016	11	137	201
DH510021E	8.334	21/64	.3281	9	111	169	DH510103	10.3		.4055	11	137	201
DH510084	8.4		.3307	9	111	169	DH510026E	10.318	13/32	.4062	11	137	201
DH510217L	8.433	Q	.3320	9	111	169	DH510104	10.4		.4094	11	137	201
DH510085	8.5		.3346	9	111	169	DH510105	10.5		.4134	11	137	201
DH510086	8.6		.3386	9	117	175	DH510106	10.6		.4173	11	143	207
DH510087	8.7		.3425	9	117	175	DH510107	10.7		.4213	11	143	207
DH510022E	8.733	11/32	.3438	9	117	175	DH510027E	10.716	27/64	.4219	11	143	207
DH510088	8.8		.3465	9	117	175	DH510108	10.8		.4252	11	143	207
DH510089	8.9		.3504	9	117	175	DH510109	10.9		.4291	11	143	207
DH510090	9.0		.3543	9	117	175	DH510110	11.0		.4331	11	143	207
DH510091	9.1		.3583	10	124	182	DH510111	11.1		.4370	12	150	215
DH510023E	9.129	23/64	.3594	10	124	182	DH510028E	11.113	7/16	.4375	12	150	215
DH510092	9.2		.3622	10	124	182	DH510112	11.2		.4409	12	150	215
DH510093	9.3		.3661	10	124	182	DH510113	11.3		.4449	12	150	215
DH510221L	9.347	U	.3680	10	124	182	DH510114	11.4		.4488	12	150	215
DH510094	9.4		.3701	10	124	182	DH510115	11.5		.4528	12	150	215

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH510

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)



EXTRA LONG
10 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH510029F	11.509	29/64	.4531	12	156	221	DH510127	12.7	1/2	.5000	13	169	235
DH510116	11.6		.4567	12	156	221	DH510128	12.8		.5039	13	169	235
DH510117	11.7		.4606	12	156	221	DH510129	12.9		.5079	13	169	235
DH510118	11.8		.4646	12	156	221	DH510130	13.0		.5118	13	169	235
DH510119	11.9		.4685	12	156	221	DH510131	13.1		.5157	14	176	243
DH510030F	11.908	15/32	.4688	12	156	221	DH510132	13.2		.5197	14	176	243
DH510120	12.0		.4724	12	156	221	DH510133	13.3		.5236	14	176	243
DH510121	12.1		.4764	13	163	229	DH510134	13.4		.5276	14	176	243
DH510122	12.2		.4803	13	163	229	DH510135	13.5		.5315	14	176	243
DH510123	12.3		.4843	13	163	229	DH510136	13.6		.5354	14	182	249
DH510031F	12.304	31/64	.4844	13	163	229	DH510137	13.7		.5394	14	182	249
DH510124	12.4		.4882	13	163	229	DH510138	13.8		.5433	14	182	249
DH510125	12.5		.4921	13	163	229	DH510139	13.9		.5472	14	182	249
DH510126	12.6		.4961	13	169	235	DH510140	14.0		.5512	14	182	249

◎ : Excellent ○ : Good


ISO	P										M					K																											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron																				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
Hrc	13	25	28	32	30	180	29	300	38	35	15	23	23	10	10	26	3	25	130	21	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	55	60	42	55	55	60	42	55	550	630	400	550
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	55	60	42	55	550	630	400	550				
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	◎	○	○	◎	○	◎	◎	○	○	○	◎	◎	○	○	○	◎	◎	○	○	○	◎	◎	○	○	○	○		

TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH515

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

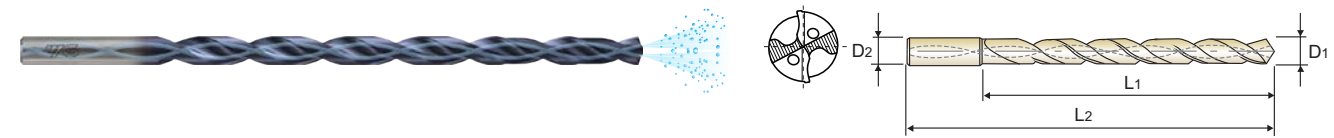

EXTRA LONG
15 x D

Unit : mm

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH515030	3.0		.1181	3	54	105	DH515055	5.5		.2165	6	99	154
DH515031	3.1		.1220	4	63	114	DH515056	5.6		.2205	6	108	163
DH515008E	3.175	1/8	.1250	4	63	114	DH515057	5.7		.2244	6	108	163
DH515032	3.2		.1260	4	63	114	DH515058	5.8		.2283	6	108	163
DH515033	3.3		.1299	4	63	114	DH515059	5.9		.2323	6	108	163
DH515034	3.4		.1339	4	63	114	DH515060	6.0		.2362	6	108	163
DH515035	3.5		.1378	4	63	114	DH515061	6.1		.2402	7	117	173
DH515036	3.6		.1417	4	72	123	DH515062	6.2		.2441	7	117	173
DH515037	3.7		.1457	4	72	123	DH515063	6.3		.2480	7	117	173
DH515038	3.8		.1496	4	72	123	DH515016E	6.350	1/4	.2500	7	117	173
DH515039	3.9		.1535	4	72	123	DH515064	6.4		.2520	7	117	173
DH515040	4.0		.1575	4	72	123	DH515065	6.5		.2559	7	117	173
DH515041	4.1		.1614	5	81	134	DH515206L	6.528	F	.2570	7	126	182
DH515042	4.2		.1654	5	81	134	DH515066	6.6		.2598	7	126	182
DH515043	4.3		.1693	5	81	134	DH515067	6.7		.2638	7	126	182
DH515044	4.4		.1732	5	81	134	DH515017E	6.746	17/64	.2656	7	126	182
DH515045	4.5		.1772	5	81	134	DH515068	6.8		.2677	7	126	182
DH515046	4.6		.1811	5	90	143	DH515069	6.9		.2717	7	126	182
DH515047	4.7		.1850	5	90	143	DH515209L	6.909	I	.2720	7	126	182
DH515048	4.8		.1890	5	90	143	DH515070	7.0		.2756	7	126	182
DH515049	4.9		.1929	5	90	143	DH515071	7.1		.2795	8	135	192
DH515050	5.0		.1969	5	90	143	DH515018E	7.142	9/32	.2812	8	135	192
DH515051	5.1		.2008	6	99	154	DH515072	7.2		.2835	8	135	192
DH515052	5.2		.2047	6	99	154	DH515073	7.3		.2874	8	135	192
DH515053	5.3		.2087	6	99	154	DH515074	7.4		.2913	8	135	192
DH515054	5.4		.2126	6	99	154	DH515075	7.5		.2953	8	135	192

◎ : Excellent ○ : Good

ISO	P										M					K																											
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron																				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
Hrc	13	25	28	32	30	180	29	300	38	35	15	23	23	10	10	26	3	25	130	21	15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550	55	60	42	55	55	60	42	55	550	630	400	550
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	55	60	42	55	550	630	400	550				
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	○	◎	○	○	◎	○	◎	◎	○	○	○	◎	◎	○	○	○	◎	◎	○	○	○	◎	◎	○	○	○	○		




TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH515

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

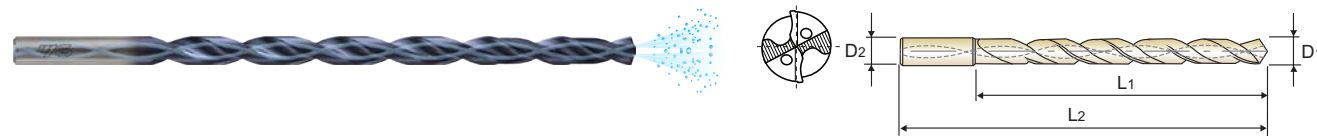

EXTRA LONG
15 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH515019E	7.541	19/64	.2969	8	144	201	DH515095	9.5		.3740	10	171	229
DH515076	7.6		.2992	8	144	201	DH515024E	9.525	3/8	.3750	10	180	238
DH515077	7.7		.3031	8	144	201	DH515096	9.6		.3780	10	180	238
DH515078	7.8		.3071	8	144	201	DH515097	9.7		.3819	10	180	238
DH515079	7.9		.3110	8	144	201	DH515098	9.8		.3858	10	180	238
DH515020E	7.938	5/16	.3125	8	144	201	DH515099	9.9		.3898	10	180	238
DH515080	8.0		.3150	8	144	201	DH515025E	9.921	25/64	.3906	10	180	238
DH515081	8.1		.3189	9	153	211	DH515100	10.0		.3937	10	180	238
DH515082	8.2		.3228	9	153	211	DH515101	10.1		.3976	11	189	253
DH515083	8.3		.3268	9	153	211	DH515102	10.2		.4016	11	189	253
DH515021E	8.334	21/64	.3281	9	153	211	DH515103	10.3		.4055	11	189	253
DH515084	8.4		.3307	9	153	211	DH515026E	10.318	13/32	.4062	11	189	253
DH515217L	8.433	Q	.3320	9	153	211	DH515104	10.4		.4094	11	189	253
DH515085	8.5		.3346	9	153	211	DH515105	10.5		.4134	11	189	253
DH515086	8.6		.3386	9	162	220	DH515106	10.6		.4173	11	198	262
DH515087	8.7		.3425	9	162	220	DH515107	10.7		.4213	11	198	262
DH515022E	8.733	11/32	.3438	9	162	220	DH515027E	10.716	27/64	.4219	11	198	262
DH515088	8.8		.3465	9	162	220	DH515108	10.8		.4252	11	198	262
DH515089	8.9		.3504	9	162	220	DH515109	10.9		.4291	11	198	262
DH515090	9.0		.3543	9	162	220	DH515110	11.0		.4331	11	198	262
DH515091	9.1		.3583	10	171	229	DH515111	11.1		.4370	12	207	272
DH515023E	9.129	23/64	.3594	10	171	229	DH515028E	11.113	7/16	.4375	12	207	272
DH515092	9.2		.3622	10	171	229	DH515112	11.2		.4409	12	207	272
DH515093	9.3		.3661	10	171	229	DH515113	11.3		.4449	12	207	272
DH515221L	9.347	U	.3680	10	171	229	DH515114	11.4		.4488	12	207	272
DH515094	9.4		.3701	10	171	229	DH515115	11.5		.4527	12	207	272

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DH515

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

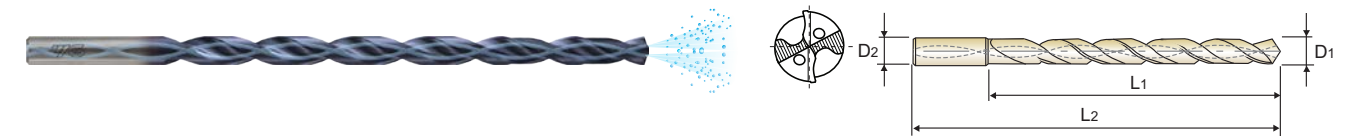

EXTRA LONG
15 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DH515029E	11.509	29/64	.4531	12	216	281	DH515127	12.7	1/2	.5000	13	234	300
DH515116	11.6		.4567	12	216	281	DH515128	12.8		.5039	13	234	300
DH515117	11.7		.4606	12	216	281	DH515129	12.9		.5079	13	234	300
DH515118	11.8		.4646	12	216	281	DH515130	13.0		.5118	13	234	300
DH515119	11.9		.4685	12	216	281	DH515131	13.1		.5157	14	243	310
DH515030E	11.908	15/32	.4688	12	216	281	DH515132	13.2		.5197	14	243	310
DH515120	12.0		.4724	12	216	281	DH515133	13.3		.5236	14	243	310
DH515121	12.1		.4764	13	225	291	DH515134	13.4		.5276	14	243	310
DH515122	12.2		.4803	13	225	291	DH515135	13.5		.5314	14	243	310
DH515123	12.3		.4843	13	225	291	DH515136	13.6		.5354	14	252	319
DH515031E	12.304	31/64	.4844	13	225	291	DH515137	13.7		.5394	14	252	319
DH515124	12.4		.4882	13	225	291	DH515138	13.8		.5433	14	252	319
DH515125	12.5		.4921	13	225	291	DH515139	13.9		.5472	14	252	319
DH515126	12.6		.4961	13	234	300	DH515140	14.0		.5512	14	252	319

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



TiAlN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAlN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

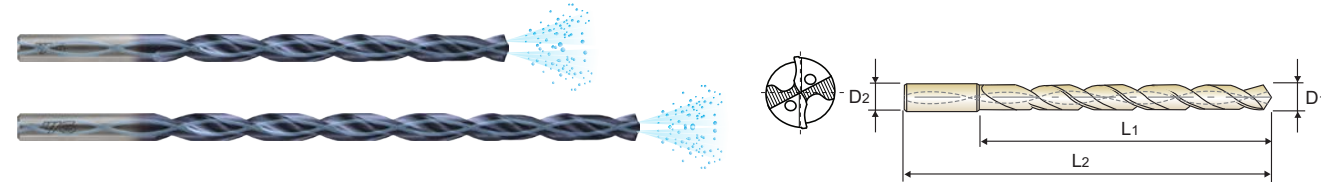

SERIES
DHM10
DHM15

EXTRA LONG
 10xD (DHM10) | 15xD (DHM15)

10XD Unit : mm

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Metric	Decimal			
TiAlN	D1		D2	L1	L2
DHM10030	3.0	.1181	6	40	80
DHM10033	3.3	.1299	6	47	87
DHM10035	3.5	.1378	6	47	87
DHM10040	4.0	.1575	6	53	93
DHM10042	4.2	.1654	6	60	100
DHM10045	4.5	.1772	6	60	100
DHM10050	5.0	.1969	6	66	106
DHM10055	5.5	.2165	6	73	113
DHM10060	6.0	.2362	6	79	119
DHM10065	6.5	.2559	8	86	126
DHM10068	6.8	.2677	8	92	132
DHM10070	7.0	.2756	8	92	132
DHM10075	7.5	.2953	8	99	139
DHM10080	8.0	.3150	8	105	145
DHM10085	8.5	.3346	10	112	156
DHM10090	9.0	.3543	10	118	162
DHM10095	9.5	.3740	10	126	170
DHM10100	10.0	.3937	10	132	176
DHM10105	10.5	.4134	12	139	188
DHM10110	11.0	.4330	12	145	194
DHM10115	11.5	.4527	12	152	201
DHM10120	12.0	.4724	12	158	207
DHM10125	12.5	.4921	14	165	214
DHM10130	13.0	.5118	14	171	220
DHM10135	13.5	.5314	14	178	227
DHM10140	14.0	.5512	14	184	233

15XD Unit : mm

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Metric	Decimal			
TiAlN	D1		D2	L1	L2
DHM15030	3.0	.1181	6	55	95
DHM15035	3.5	.1378	6	64	104
DHM15040	4.0	.1575	6	73	113
DHM15045	4.5	.1772	6	82	122
DHM15050	5.0	.1969	6	91	131
DHM15055	5.5	.2165	6	100	140
DHM15060	6.0	.2362	6	109	149
DHM15070	7.0	.2756	8	127	167
DHM15080	8.0	.3150	8	145	185
DHM15090	9.0	.3543	10	163	207
DHM15100	10.0	.3937	10	182	226
DHM15110	11.0	.4330	12	200	249
DHM15120	12.0	.4724	12	218	267


◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAlN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAlN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

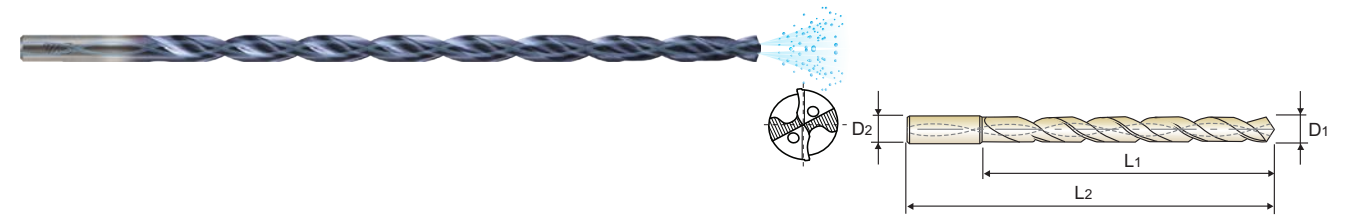

SERIES
DHM20

EXTRA LONG
 20xD (DHM20)

20XD Unit : mm

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Metric	Decimal			
TiAlN	D1		D2	L1	L2
DHM20030	3.0	.1181	6	70	110
DHM20035	3.5	.1378	6	82	122
DHM20040	4.0	.1575	6	93	133
DHM20045	4.5	.1772	6	105	145
DHM20050	5.0	.1969	6	116	156
DHM20055	5.5	.2165	6	128	168
DHM20060	6.0	.2362	6	139	179
DHM20070	7.0	.2756	8	162	202
DHM20080	8.0	.3150	8	185	225
DHM20090	9.0	.3543	10	208	252
DHM20100	10.0	.3937	10	232	276
DHM20110	11.0	.4330	12	255	304
DHM20120	12.0	.4724	12	278	327

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	35	10	29	32	38	15	35	15	23	10	10	26	3	25		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎




TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DHM25

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

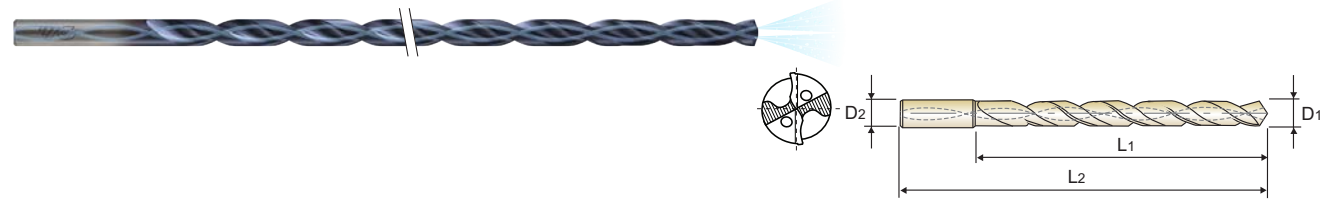

CARBIDE 30° h6 h7 140° 45 bar TiAIN p.166

EXTRA LONG
25 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DHM25030	3.0		.1181	6	85	125	DHM25055	5.5		.2165	6	155	195
DHM25031	3.1		.1220	6	99	139	DHM25056	5.6		.2205	6	169	209
DHM25008E	3.175	1/8	.1250	6	99	139	DHM25057	5.7		.2244	6	169	209
DHM25032	3.2		.1260	6	99	139	DHM25058	5.8		.2283	6	169	209
DHM25033	3.3		.1299	6	99	139	DHM25059	5.9		.2323	6	169	209
DHM25034	3.4		.1339	6	99	139	DHM25060	6.0		.2362	6	169	209
DHM25035	3.5		.1378	6	99	139	DHM25061	6.1		.2402	8	183	223
DHM25036	3.6		.1417	6	113	153	DHM25062	6.2		.2441	8	183	223
DHM25037	3.7		.1457	6	113	153	DHM25063	6.3		.2480	8	183	223
DHM25038	3.8		.1496	6	113	153	DHM25016E	6.350	1/4	.2500	8	183	223
DHM25039	3.9		.1535	6	113	153	DHM25064	6.4		.2520	8	183	223
DHM25040	4.0		.1575	6	113	153	DHM25065	6.5		.2559	8	183	223
DHM25041	4.1		.1614	6	127	167	DHM25206L	6.528	F	.2570	8	197	237
DHM25042	4.2		.1654	6	127	167	DHM25066	6.6		.2598	8	197	237
DHM25043	4.3		.1693	6	127	167	DHM25067	6.7		.2638	8	197	237
DHM25044	4.4		.1732	6	127	167	DHM25017E	6.746	17/64	.2656	8	197	237
DHM25045	4.5		.1772	6	127	167	DHM25068	6.8		.2677	8	197	237
DHM25046	4.6		.1811	6	141	181	DHM25069	6.9		.2717	8	197	237
DHM25047	4.7		.1850	6	141	181	DHM25209L	6.909	I	.2720	8	197	237
DHM25048	4.8		.1890	6	141	181	DHM25070	7.0		.2756	8	197	237
DHM25049	4.9		.1929	6	141	181	DHM25071	7.1		.2795	8	211	251
DHM25050	5.0		.1969	6	141	181	DHM25018E	7.142	9/32	.2812	8	211	251
DHM25051	5.1		.2008	6	155	195	DHM25072	7.2		.2835	8	211	251
DHM25052	5.2		.2047	6	155	195	DHM25073	7.3		.2874	8	211	251
DHM25053	5.3		.2087	6	155	195	DHM25074	7.4		.2913	8	211	251
DHM25054	5.4		.2126	6	155	195	DHM25075	7.5		.2953	8	211	251

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DHM25

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

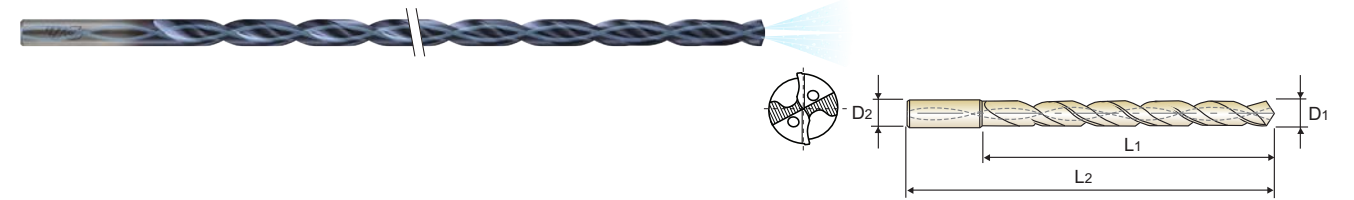

CARBIDE 30° h6 h7 140° 45 bar TiAIN p.166

EXTRA LONG
25 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal					Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2	TiAIN	D1			D2	L1	L2
DHM25019E	7.541	19/64	.2969	8	225	265	DHM25088	8.8		.3465	10	253	297
DHM25076	7.6		.2992	8	225	265	DHM25089	8.9		.3504	10	253	297
DHM25077	7.7		.3031	8	225	265	DHM25090	9.0		.3543	10	253	297
DHM25078	7.8		.3071	8	225	265	DHM25091	9.1		.3583	10	268	312
DHM25079	7.9		.3110	8	225	265	DHM25023E	9.129	23/64	.3594	10	268	312
DHM25020E	7.938	5/16	.3125	8	225	265	DHM25092	9.2		.3622	10	268	312
DHM25080	8.0		.3150	8	225	265	DHM25093	9.3		.3661	10	268	312
DHM25081	8.1		.3189	10	239	283	DHM25221L	9.347	U	.3680	10	268	312
DHM25082	8.2		.3228	10	239	283	DHM25094	9.4		.3701	10	268	312
DHM25083	8.3		.3268	10	239	283	DHM25095	9.5		.3740	10	268	312
DHM25021E	8.334	21/64	.3281	10	239	283	DHM25024E	9.525	3/8	.3750	10	282	326
DHM25084	8.4		.3307	10	239	283	DHM25096	9.6		.3780	10	282	326
DHM25217L	8.433	Q	.3320	10	239	283	DHM25097	9.7		.3819	10	282	326
DHM25085	8.5		.3346	10	239	283	DHM25098	9.8		.3858	10	282	326
DHM25086	8.6		.3386	10	253	297	DHM25099	9.9		.3898	10	282	326
DHM25087	8.7		.3425	10	253	297	DHM25025E	9.921	25/64	.3906	10	282	326
DHM25022E	8.733	11/32	.3438	10	253	297	DHM25100	10.0		.3937	10	282	326

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					



TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DHM30

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)



CARBIDE 30° h6 h7 140° 45 bar TiAIN p.166

EXTRA LONG
30 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2
DHM30030	3.0		.1181	6	100	140
DHM30031	3.1		.1220	6	117	157
DHM30008E	3.175	1/8	.1250	6	117	157
DHM30032	3.2		.1260	6	117	157
DHM30033	3.3		.1299	6	117	157
DHM30034	3.4		.1339	6	117	157
DHM30035	3.5		.1378	6	117	157
DHM30036	3.6		.1417	6	133	173
DHM30037	3.7		.1457	6	133	173
DHM30038	3.8		.1496	6	133	173
DHM30039	3.9		.1535	6	133	173
DHM30040	4.0		.1575	6	133	173
DHM30041	4.1		.1614	6	150	190
DHM30042	4.2		.1654	6	150	190
DHM30043	4.3		.1693	6	150	190
DHM30044	4.4		.1732	6	150	190
DHM30045	4.5		.1772	6	150	190
DHM30046	4.6		.1811	6	166	206
DHM30047	4.7		.1850	6	166	206
DHM30048	4.8		.1890	6	166	206
DHM30049	4.9		.1929	6	166	206
DHM30050	5.0		.1969	6	166	206
DHM30051	5.1		.2008	6	183	223
DHM30052	5.2		.2047	6	183	223
DHM30053	5.3		.2087	6	183	223
DHM30054	5.4		.2126	6	183	223

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2
DHM30055	5.5		.2165	6	183	223
DHM30056	5.6		.2205	6	199	239
DHM30057	5.7		.2244	6	199	239
DHM30058	5.8		.2283	6	199	239
DHM30059	5.9		.2323	6	199	239
DHM30060	6.0		.2362	6	199	239
DHM30061	6.1		.2402	8	216	256
DHM30062	6.2		.2441	8	216	256
DHM30063	6.3		.2480	8	216	256
DHM30016E	6.350	1/4	.2500	8	216	256
DHM30064	6.4		.2520	8	216	256
DHM30065	6.5		.2559	8	216	256
DHM30206L	6.528	F	.2570	8	232	272
DHM30066	6.6		.2598	8	232	272
DHM30067	6.7		.2638	8	232	272
DHM30017E	6.746	17/64	.2656	8	232	272
DHM30068	6.8		.2677	8	232	272
DHM30069	6.9		.2717	8	232	272
DHM30209L	6.909	I	.2720	8	232	272
DHM30070	7.0		.2756	8	232	272
DHM30071	7.1		.2795	8	249	289
DHM30018E	7.142	9/32	.2812	8	249	289
DHM30072	7.2		.2835	8	249	289
DHM30073	7.3		.2874	8	249	289
DHM30074	7.4		.2913	8	249	289
DHM30075	7.5		.2953	8	249	289

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○


ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

TiAIN-COATED SOLID CARBIDE DREAM DRILLS - MQL TYPE with COOLANT HOLES

SERIES

DHM30

- ▶ 4-Facet Point for good centering capability
- ▶ Optimized special flutes are ideal for removing chips and for productive drilling
- ▶ Enhanced chip evacuation by polished flute upgraded TiAIN nano layer full coating
- ▶ MQL system compatible (Minimum Quantity Lubrication)

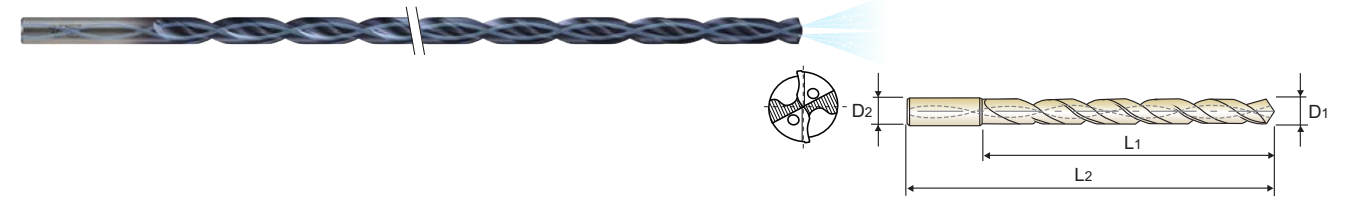


CARBIDE 30° h6 h7 140° 45 bar TiAIN p.166

EXTRA LONG
30 x D

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2
DHM30019E	7.541	19/64	.2969	8	265	305
DHM30076	7.6		.2992	8	265	305
DHM30077	7.7		.3031	8	265	305
DHM30078	7.8		.3071	8	265	305

EDP No.	Drill Diameter			Shank Diameter	Flute Length	Overall Length
	Metric	Inch	Decimal			
TiAIN	D1			D2	L1	L2
DHM30079	7.9		.3110	8	265	305
DHM30020E	7.938	5/16	.3125	8	265	305
DHM30080	8.0		.3150	8	265	305

▶ Made to order in depth 35xD(Ø3-Ø6) & 40xD(Ø3-Ø6)

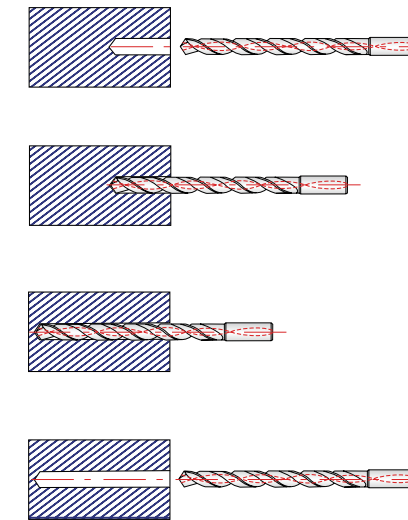

1. Guide Drilling should be done as Diameter +0.01 ~ +0.1mm between 3xD and 5xD depth.
2. For Main Drilling, proceed with low RPM at Guide Drilling segment. (RPM 300, FEED 400mm/min.)
3. Just before the end of Guide Drilling segment, reduce feed to zero and increase the RPM according to Recommended Cutting Condition chart. (See above)
4. After then, proceed main drilling by increasing feed without step drilling.
5. When coming out from Guide Drilling start point after drilling, RPM should be reduced as 300 and feed should be 1000 mm/min.
6. When coming out from Guide Drilling segment to the outside, the feed should be decreased as 50%.

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Hrc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	○	◎	○	○	◎	○	◎	○	◎	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
Hrc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



RECOMMENDED CUTTING CONDITIONS

DH510, DH515, DH520, DHM10, DHM15

DHM20, DHM25, DHM30 SERIES with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

Table with columns: ISO, VDI 3323, Material Description, SFM (10xD, 25xD), METRIC (3.0, 4.0, 5.0, 6.0), FRACTIONAL (1/8, 3/16, 1/4), DECIMAL (.1181, .1250, .1575, .1875, .1969, .2362, .2500), RPM (10xD, 25xD), FEED. Rows include Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel, Grey cast iron, Nodular cast iron, and Malleable cast iron.

▶ NEXT PAGE

RECOMMENDED CUTTING CONDITIONS

DREAM DRILLS MQL TYPE

DH510, DH515, DH520, DHM10, DHM15


DHM20, DHM25, DHM30 SERIES with COOLANT HOLES

SFM = ft/min.
RPM = rev./min.
FEED = inch/rev.

Table with columns: ISO, VDI 3323, Material Description, SFM (10xD, 25xD), METRIC (8.0, 10.0, 12.0, 14.0), FRACTIONAL (5/16, 3/8, 1/2), DECIMAL (.3125, .3150, .3750, .3937, .4724, .5000, .5512), RPM (10xD, 25xD), FEED. Rows include Non-alloy steel, Low alloy steel, High alloyed steel, and tool steel, Grey cast iron, Nodular cast iron, and Malleable cast iron.



Global Cutting Tool Leader **YG-1**



DREAM DRILLS



Leading Through Innovation



SOLID CARBIDE

DREAM DRILLS

for HIGH HARDENED STEELS

- For High Hardened Steels (HRc50 to HRc70)


DREAM DRILLS for HIGH HARDENED STEELS

Low Helix

The low Helix angle maximizes tools' rigidity and stability with less deflection

Special Thinning (R+U Thinning)

Unique drill point geometry with special thinning to minimize cutting workload, axial thrust loading and heat generation.

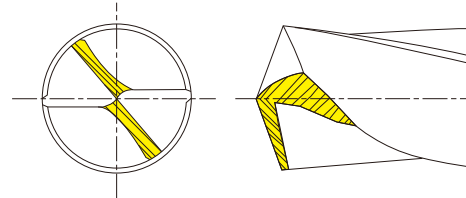


Coating

TiAlN nano coating combines high hardness with high thermal stability against oxidation, allows machining the upper level of hardened steels HRc50-HRc70.

Polished Flutes

Polished flutes improve coating addition, with better chip control and evacuation.



Point Shape

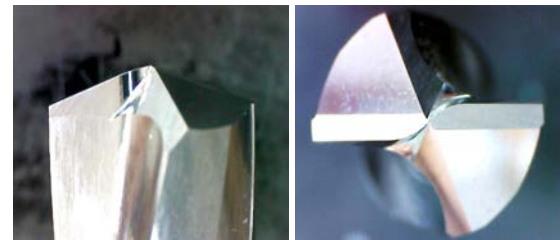

CASE STUDY

Cutting Condition

Size	Ø10 × Ø10 × 63 × 111
Work Material	- AISI : H13 - DIN : X155CrV-Mo12-1(HRc60) - JIS : SKD11
RPM	380 rev./min.
SFM	39 ft/min.
Feed	.0016 inch/rev.
Drilling Depth	.98" (2.5xD)
Coolant	Wet Cut

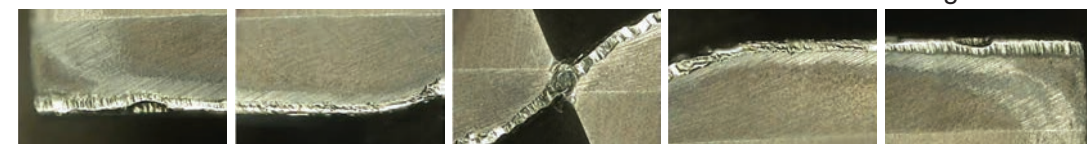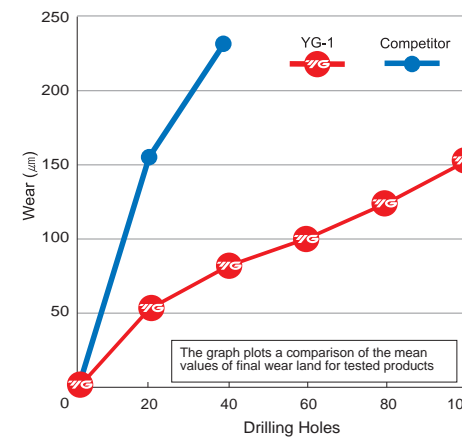

After Drilling 100 Holes

Competitor



After Drilling 40 Holes

TiAlN-COATED SOLID CARBIDE

DREAM DRILLS for HIGH HARDENED STEELS (HRc50 ~ HRc70)

SERIES

DH501

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRc70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling



SHORT

3 × D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal					Fractional	Decimal			
TiAlN	D1		D2	L1	L2	TiAlN	D1		D2	L1	L2
DH501001	1/8	.1250	1/8	21/32	2	DH501027	#4	.2090	1/4	1-9/32	2-7/8
DH501002	#30	.1285	3/16	23/32	2	DH501028	#3	.2130	1/4	1-13/32	3
DH501003	#29	.1360	3/16	13/16	2	DH501029	7/32	.2188	1/4	1-13/32	3
DH501004	#28	.1405	3/16	13/16	2	DH501030	#2	.2210	1/4	1-13/32	3
DH501005	9/64	.1406	3/16	13/16	2	DH501031	#1	.2280	1/4	1-13/32	3
DH501006	#27	.1440	3/16	13/16	2	DH501032	15/64	.2344	1/4	1-13/32	3
DH501007	#26	.1470	3/16	13/16	2	DH501033	B	.2380	1/4	1-19/32	3-1/8
DH501008	#25	.1495	3/16	7/8	2-1/16	DH501034	C	.2420	1/4	1-19/32	3-1/8
DH501009	#24	.1520	3/16	7/8	2-1/16	DH501035	D	.2460	1/4	1-19/32	3-1/8
DH501010	#23	.1540	3/16	7/8	2-1/16	DH501036	1/4	.2500	1/4	1-19/32	3-1/8
DH501011	5/32	.1562	3/16	7/8	2-1/16	DH501037	F	.2570	3/8	1-19/32	3-1/8
DH501012	#22	.1570	3/16	7/8	2-1/16	DH501038	G	.2610	3/8	1-19/32	3-1/8
DH501013	#21	.1590	3/16	7/8	2-1/16	DH501039	17/64	.2656	3/8	1-19/32	3-1/8
DH501014	#20	.1610	3/16	1	2-1/2	DH501040	I	.2720	3/8	1-25/32	3-3/8
DH501015	#19	.1660	3/16	1	2-1/2	DH501041	J	.2770	3/8	1-25/32	3-3/8
DH501016	11/64	.1719	3/16	1-1/8	2-3/4	DH501042	9/32	.2812	3/8	1-25/32	3-3/8
DH501017	#15	.1800	3/16	1-1/8	2-3/4	DH501043	L	.2900	3/8	1-25/32	3-3/8
DH501018	#14	.1820	3/16	1-1/8	2-3/4	DH501044	M	.2950	3/8	1-25/32	3-3/8
DH501019	3/16	.1875	3/16	1-1/8	2-3/4	DH501045	19/64	.2969	3/8	1-25/32	3-3/8
DH501020	#10	.1935	1/4	1-9/32	2-7/8	DH501046	N	.3020	3/8	1-31/32	3-7/8
DH501021	#9	.1960	1/4	1-9/32	2-7/8	DH501047	5/16	.3125	3/8	1-31/32	3-7/8
DH501022	#8	.1990	1/4	1-9/32	2-7/8	DH501048	O	.3160	3/8	1-31/32	3-7/8
DH501023	#7	.2010	1/4	1-9/32	2-7/8	DH501049	21/64	.3281	3/8	1-31/32	3-7/8
DH501024	13/64	.2031	1/4	1-9/32	2-7/8	DH501050	Q	.3320	3/8	1-31/32	3-7/8
DH501025	#6	.2040	1/4	1-9/32	2-7/8	DH501051	R	.3390	3/8	2-1/4	4-1/8
DH501026	#5	.2055	1/4	1-9/32	2-7/8	DH501052	11/32	.3438	3/8	2-1/4	4-1/8

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	70	42
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400
Recommended																	◎	◎	◎	

ISO	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34		55	60	70	42	
HB											200	280	250	350	320	400 Rm	1050 Rm	550	630	400	
Recommended																		◎	◎	◎	

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS for HIGH HARDENED STEELS (HRC50 ~ HRC70) SERIES
DH501

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRC70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling

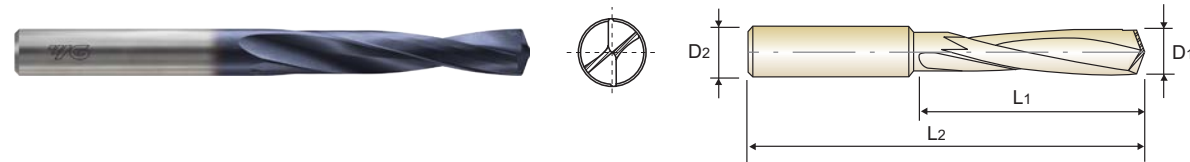

SHORT
 3 x D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAIN	D1		D2	L1	L2
DH501053	23/64	.3594	3/8	2-1/4	4-1/8
DH501054	U	.3680	3/8	2-1/4	4-1/8
DH501055	3/8	.3750	3/8	2-1/4	4-1/8
DH501056	V	.3770	1/2	2-1/2	4-3/8
DH501057	25/64	.3906	1/2	2-1/2	4-3/8
DH501058	X	.3970	1/2	2-1/2	4-3/8
DH501059	Y	.4040	1/2	2-1/2	4-3/8
DH501060	13/32	.4062	1/2	2-1/2	4-3/8
DH501061	Z	.4130	1/2	2-1/2	4-3/8
DH501062	27/64	.4219	1/2	2-13/16	4-5/8
DH501063	7/16	.4375	1/2	2-13/16	4-5/8
DH501064	29/64	.4531	1/2	2-13/16	4-5/8
DH501065	15/32	.4688	1/2	2-13/16	4-5/8
DH501066	31/64	.4844	1/2	2-13/16	4-5/8
DH501067	1/2	.5000	1/2	3-1/16	5
DH501068	33/64	.5156	5/8	3-1/16	5

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Fractional	Decimal			
TiAIN	D1		D2	L1	L2
DH501069	17/32	.5312	5/8	3-1/16	5
DH501070	35/64	.5469	5/8	3-1/16	5
DH501071	9/16	.5625	5/8	3-1/16	5
DH501072	37/64	.5781	5/8	3-9/32	5-1/4
DH501073	19/32	.5937	5/8	3-9/32	5-1/4
DH501074	39/64	.6094	5/8	3-9/32	5-1/4
DH501075	5/8	.6250	5/8	3-9/32	5-1/4
DH501076	41/64	.6406	3/4	3-9/32	5-1/4
DH501077	21/32	.6563	3/4	3-11/16	5-5/8
DH501078	43/64	.6719	3/4	3-11/16	5-5/8
DH501079	11/16	.6875	3/4	3-11/16	5-5/8
DH501080	45/64	.7031	3/4	3-11/16	5-5/8
DH501081	23/32	.7188	3/4	3-3/4	6
DH501082	47/64	.7344	3/4	3-3/4	6
DH501083	3/4	.7500	3/4	3-3/4	6


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180		180	260	160	250	130	230
Recommended																				

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	40	41
HRC											15	30	25	38	34			55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630		400	550
Recommended																		◎	◎	◎		

TiAIN-COATED SOLID CARBIDE
DREAM DRILLS for HIGH HARDENED STEELS (HRC50 ~ HRC70) SERIES
DH500

- ▶ Drilling for High Hardened Steels; Quenched Steels, Tempered Steels (under HRC70)
- ▶ Special geometry design for Hardened Steels
- ▶ Minimum of cutting load through special thinning
- ▶ Performing good chip removal and powerful drilling

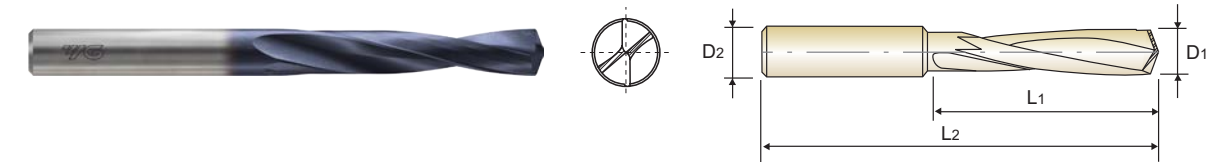

SHORT
 3 x D

Unit : inch

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Metric	Decimal			
TiAIN	D1		D2	L1	L2
DH500010	1.0	.0394	3	6	40
DH500011	1.1	.0433	3	6	40
DH500012	1.2	.0472	3	6	40
DH500013	1.3	.0512	3	8	40
DH500014	1.4	.0551	3	8	40
DH500015	1.5	.0591	3	8	40
DH500016	1.6	.0630	3	10	40
DH500017	1.7	.0669	3	10	40
DH500018	1.8	.0709	3	10	40
DH500019	1.9	.0748	3	10	40
DH500020	2.0	.0787	3	12	42
DH500025	2.5	.0984	3	14	44
DH500026	2.6	.1024	3	16	44
DH500028	2.8	.1102	3	16	46
DH500030	3.0	.1181	3	18	46
DH500033	3.3	.1299	4	18	48
DH500034	3.4	.1339	4	20	50
DH500035	3.5	.1378	4	20	50
DH500038	3.8	.1496	4	22	52
DH500040	4.0	.1575	4	22	52
DH500041	4.1	.1614	6	25	65
DH500042	4.2	.1654	6	25	65
DH500043	4.3	.1693	6	28	68
DH500044	4.4	.1732	6	28	68
DH500045	4.5	.1772	6	28	68
DH500046	4.6	.1811	6	28	68
DH500048	4.8	.1890	6	32	72
DH500049	4.9	.1929	6	32	72
DH500050	5.0	.1969	6	32	72

Unit : mm

EDP No.	Drill Diameter		Shank Diameter	Flute Length	Overall Length
	Metric	Decimal			
TiAIN	D1		D2	L1	L2
DH500051	5.1	.2008	6	32	72
DH500052	5.2	.2047	6	32	72
DH500053	5.3	.2087	6	32	72
DH500055	5.5	.2165	6	35	75
DH500060	6.0	.2362	6	35	75
DH500062	6.2	.2441	8	40	80
DH500065	6.5	.2559	8	40	80
DH500068	6.8	.2677	8	45	85
DH500069	6.9	.2717	8	45	85
DH500070	7.0	.2756	8	45	85
DH500075	7.5	.2953	8	45	85
DH500080	8.0	.3150	8	50	98
DH500085	8.5	.3346	10	50	98
DH500086	8.6	.3386	10	57	105
DH500088	8.8	.3465	10	57	105
DH500090	9.0	.3543	10	57	105
DH500093	9.3	.3661	10	57	105
DH500095	9.5	.3740	10	57	105
DH500100	10.0	.3937	10	63	111
DH500102	10.2	.4016	12	63	111
DH500103	10.3	.4055	12	63	111
DH500105	10.5	.4134	12	71	111
DH500108	10.8	.4252	12	71	119
DH500110	11.0	.4331	12	71	119
DH500115	11.5	.4528	12	71	119
DH500120	12.0	.4724	12	71	119
DH500121	12.1	.4764	14	77	125
DH500140	14.0	.5512	14	77	125

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180		180	260	160	250	130	230
Recommended																				

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39.1	39.3	40	41
HRC											15	30	25	38	34			55	60	70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630		400	550
Recommended																		◎	◎	◎		

DH501, DH500 SERIES without COOLANT HOLES

SFM = ft./min.
RPM = rev./min.
FEED = inch/rev.

ISO	VDI 3323	Material Description	SFM	Drill Diameter											
				METRIC	3.0	-	4.0	-	5.0	6.0	-	-	8.0	-	10.0
				FRACTIONAL	-	1/8	-	3/16	-	-	1/4	5/16	-	3/8	-
				DECIMAL	.1181	.1250	.1575	.1875	.1969	.2362	.2500	.3125	.3150	.3750	.3937
H	38	Hardened steel	66	RPM	2120	1590	1270	1060	800	640					
				FEED	.0004 - .0012	.0004 - .0016	.0004 - .0016	.0004 - .0020	.0004 - .0020	.0004 - .0020	.0004 - .0020				
	39.1		49	RPM	1590	1190	950	800	600	480					
				FEED	.0004 - .0012	.0004 - .0016	.0004 - .0016	.0004 - .0020	.0004 - .0020	.0004 - .0020	.0004 - .0020				
	39.3		39	RPM	1270	950	760	640	480	380					
				FEED	.0004 - .0012	.0004 - .0016	.0004 - .0016	.0004 - .0020	.0004 - .0020	.0004 - .0020	.0004 - .0020				

ISO	VDI 3323	Material Description	SFM	Drill Diameter								
				METRIC	12.0	-	14.0	-	-	16.0	18.0	-
				FRACTIONAL	-	1/2	-	9/16	5/8	-	-	3/4
				DECIMAL	.4724	.5000	.5512	.5625	.6250	.6299	.7087	.7500
H	38	Hardened steel	66	RPM	530	504	450	403	356	336		
				FEED	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	
	39.1		49	RPM	400	374	340	299	299	250		
				FEED	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	
	39.3		39	RPM	320	298	270	238	238	199		
				FEED	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	.0004 - .0024	

HIGH QUALITY PRODUCTS and ON TIME DELIVERY
for WORLD-WIDE CUSTOMERS

Since 1981, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

- BELGIUM
- FINLAND
- ITALY
- PORTUGAL
- SLOVENIA
- THE NETHERLANDS
- CROATIA
- FRANCE
- LITHUANIA
- ROMANIA
- SPAIN
- TÜRKIYE
- CZECH REPUBLIC
- GERMANY
- NORWAY
- SWEDEN
- UNITED KINGDOM
- DENMARK
- HUNGARY
- POLAND
- SERBIA
- SWITZERLAND
- AUSTRIA
- GREECE
- ALBANIA
- BOSNIA AND HERZEGOVINA
- UKRAINE
- UZBEKISTAN
- BULGARIA
- ESTONIA

ASIA PACIFIC

- AUSTRALIA
- INDONESIA
- MALAYSIA
- SOUTH KOREA
- VIETNAM
- CHINA
- ISRAEL
- PAKISTAN
- TAIWAN
- HONG KONG
- JAPAN
- PHILIPPINES
- THAILAND
- INDIA
- SAUDI ARABIA
- SINGAPORE
- UNITED ARAB EMIRATES

AMERICAS

- BRAZIL
- CANADA
- COLOMBIA
- MEXICO
- UNITED STATES

AFRICA

- EGYPT
- SOUTH AFRICA

YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

E-mail: yg1@yg1.solutions www.yg1.solutions

YG-1 CO., LTD.

YG-1 USA

730 Corporate Woods Parkway,
Vernon Hills, IL 60061 U.S.A.

Phone: +1 800-765-8665

Technical Support: 888-868-5988

www.yg1usa.com

YG-1 CANADA INC.

3375 North Service Road, Unit A8,
Burlington, Ontario, L7N 3G2 Canada

Phone: +1 905-335-2500

FAX: +1 905-335-4003

Customer Service: orders@yg1.ca

www.yg1.ca

YG-1 TOOLS MEXICO

Parque Industrial Advance Aeropuerto Modulo 4 Edif A,
Col. Navajas, El Marques,
Querétaro, México CP 76260

Phone: +52 442-348-12-70

E-mail: ventas@yg1mexico.com

www.yg1mexico.com

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

www.yg1.solutions

E-mail: yg1@yg1.solutions



Search 'YG-1' on social media outlets



YG1YUDD2409004