





DATA OUTPUT

ATTENTION: ACTUAL SLOT WIDTH IS 1/10 OF THE READING

ELECTRONIC TAPER GAGE


- Measuring opening, slot width
- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: data output cable (part no. 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A, 7305-A01/A02)

Part No.	Range	Accuracy
1160-10	.008-.394"/0.2-10mm	±.001"

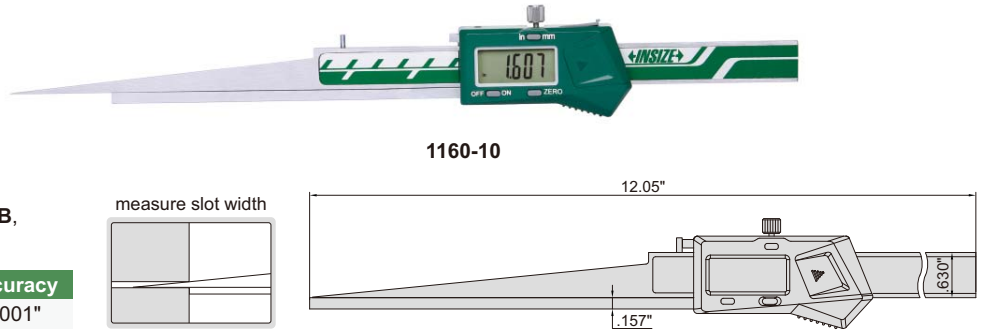

- For quick measurement of slot width
- Stain chrome plated reading surface
- Made of stainless steel

Part No.	Range	Graduation	Accuracy
4630-1E	.01-.15"	.001"	±.003"




4630-1E

TAPER GAGE


TAPER GAGES

- Measure opening, slot width, hole diameter, etc.
- Diameter correction table on the back (except 4833-4E)
- Made of stainless steel


measure diameter of hole



measure slot width



Part No.	Range	Graduation	Accuracy	L	W
4833-1E	1/32~5/8"	1/64"	±.004"	5.748"	.669"
4833-2E	5/8~1-3/16"	1/64"	±.004"	6.260"	1.197"
4833-3E	1-3/16~1-3/4"	1/64"	±.004"	6.535"	1.787"
4833-4E	1-3/4~2-3/8"	1/64"	±.004"	6.693"	2.382"





front




back

4833-2E

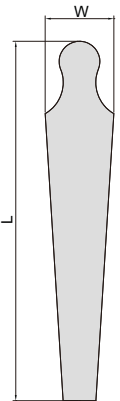

- Graduation: 1/64"
- Include 4 pcs (1/16~5/16", 21/64~9/16", 37/64~13/16", 53/64~1-1/16")
- Measure opening, slot width, hole diameter, etc.
- Diameter correction table on the back
- Made of stainless steel

Part No.	Range	Accuracy
4837-1E	1/16~1-1/16"	±.004"

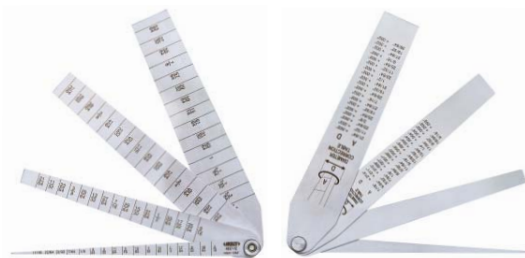


front


back

4837-1E

measure diameter of hole



measure slot width



TAPER GAGE SET